



aerospace  
climate control  
electromechanical  
**filtration**  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



# Filtration Housings

A guide to products and services



ENGINEERING YOUR SUCCESS.

# Contents

## General

Precision Manufacturing .....	4-5	Other Products from Parker domnick hunter .....	81
Project Management .....	6-7	Parker Hannifin Group Product Range .....	82
A Dedicated Filter Range .....	8-9		

## Single Cartridge Housings

HSA	sanitary air / gas .....	12-13	HSI	in-line sanitary liquid .....	28-29
HSA⊕	sanitary air / gas .....	14-15	HSI⊕	in-line sanitary liquid .....	30-31
HBA	industrial air / gas .....	16-17	HIL	industrial liquid .....	32-33
HBA⊕	industrial air / gas .....	18-19	HIL⊕	industrial liquid .....	34-35
HSV	industrial vent .....	20-21	ZVP	industrial plastic .....	36
HSV⊕	industrial vent .....	22-23	Heating Jackets .....		37
HSL	sanitary liquid .....	24-25			
HSL⊕	sanitary liquid .....	26-27			

## Small Scale Single Cartridge Housings

HSA	sanitary air / gas .....	40-41	HSL	sanitary liquid .....	52-53
HSA⊕	sanitary air / gas .....	42-43	HSL⊕	sanitary liquid .....	54-55
HBA	industrial air / gas .....	44-45	HSI	in-line sanitary liquid .....	56-57
HBA⊕	industrial air / gas .....	46-47	HSI⊕	in-line sanitary liquid .....	58-59
HSV	industrial vent .....	48-49	HIF	industrial liquid .....	60-61
HSV⊕	industrial vent .....	50-51	HIF⊕	industrial liquid .....	62-63

## Multi-Round Cartridge Housings

ZVA	air / gas .....	66-67	VIL	industrial multi liquid .....	72-73
VIS	high flow steam .....	68-69	VSH	beverage .....	74-75
VSL	sanitary liquid .....	70-71			

## Accessories

Gauges .....	78	Spares .....	80
Valves .....	79	Certificates .....	80

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specification, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a product's suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.

# Precision Manufacturing

Experience and qualifications provide a flexible approach



Parker domnick hunter, Process Division manufacture stainless and carbon steel pressure vessels and filtration systems that are designed to meet International industry standards and specific customer application requirements.

A combination of highly skilled employees, dedicated manufacturing facility and 35 years experience of supplying process industries around the world Parker domnick hunter provide solutions that match your requirements for performance, quality and value.

Our fabrication facility manufacture a standard range of stainless steel housings to support our range of filters, which can be modified and adapted to meet any process requirements. Our strength is in providing a range of products that meet industry standards with a flexibility to meet your own process requirements.

## Manufacturing Capability

- Pressure vessels from 0.1 to 10,000 litres
- Capacity: 5,000+ per year
- Automatic and hand welding techniques
- Assembly and hydro test facility
- Helium leak test, N.D.T., P.M.I. and stress relief
- Welding capability
  - manual / mechanical
  - MIG, MAG, TIG, MMA
  - micro plasma seam
  - keyhole plasma

## Testing

- Helium leak test
- Surface finish
- Hydrostatic testing
- Pneumatic testing
- Ultrasonic testing
- Radiographic (x-ray)
- Swab testing
- Magnetic particle flow detection
- Riboflow testing
- Earth continuity testing

## Manufacturing Best Practice


- ISO9001:2000
- ISO13485:2003
- ISO14001:2004

## Vessels Built to Industry Standards

- PED (CE)
- EN / B445
- EN / 286
- BN / 1210
- ATEX
- ASME U
- ASME BPE

## Stamp of Approval

- Certificate of Authorisation (U Stamp)
- National Board Certificate of Authorisation
- American Society of Mechanical Engineers

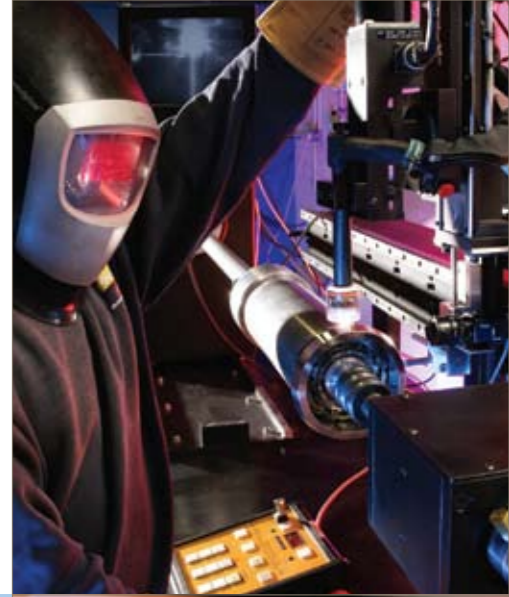

# Project Management

Engineering your success



Parker domnick hunter, Process Division brings a wealth of experience in working on engineering projects around the world in partnership with some of the leading engineering, consultancy and project management groups. A highly trained workforce have the skills to match your exact requirements to the highest possible standards.

As part of the \$12 Billion turnover, Parker Hannifin Corporation, Parker domnick hunter can provide:

- Project management
- Process system design
- System fabrication
- Global support
- Operator training
- Dedicated technical support team
- Quality management systems

Our experience and expertise has seen us design and fabricate major systems for industries including:

- Pharmaceutical
- Chemical
- Food and beverage
- Industrial fermentation

A combination of hands on experience, design and manufacturing excellence have gained Parker domnick hunter a reputation for supplying high quality competitive filtration systems.

## Leading Edge Design



Parker domnick hunter's, Sustaining Engineering Group are dedicated to providing a complete design service for coded pressure vessels, high integrity piping and all associated controls and instrumentation for project or contract work.

Using the latest in 3D CAD technology, Parker domnick hunter have the ability to support each project with:

- Visualisation - Photo Rendering
- Rapid Prototyping
- FEA - Finite Element Analysis
- CFD - Computational Flow Dynamics

## Project Partnership

During the whole qualification phase of a new project, Parker domnick hunter provides formal validation plans, continuous support and assistance with all stages of qualification from factory acceptance through to site installation.

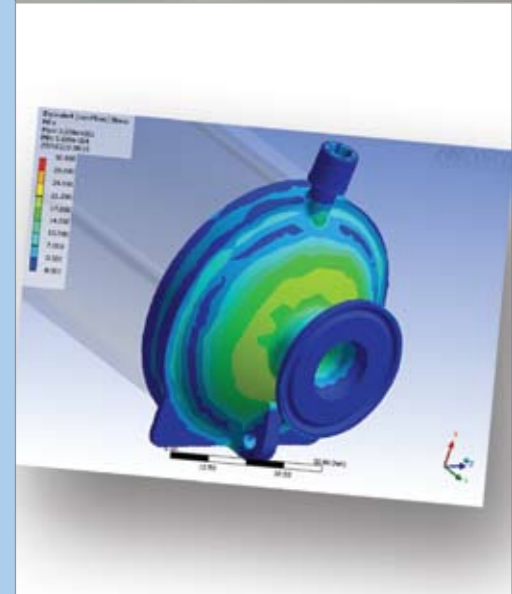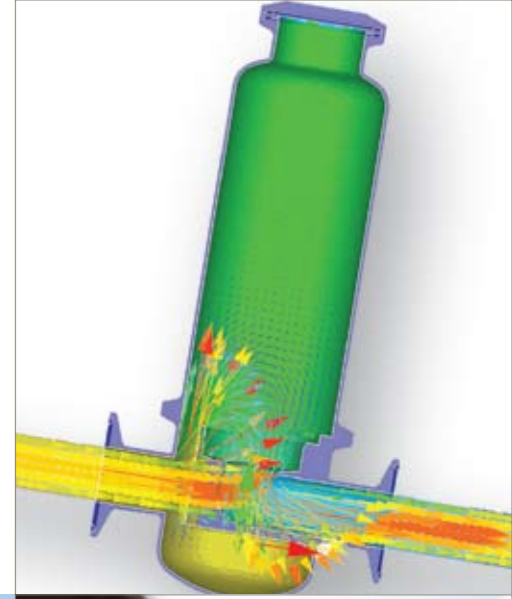

# Dedicated Filter Range

Choice and flexibility to suit your application



Parker domnick hunter, Process Division manufacture a range of microfiltration cartridges for liquid and gas applications that utilise the latest production techniques, combining the most suitable membranes and filtration media with the latest easy to use formats.

All of Parker domnick hunter's filters meet strict validation guidelines providing a high degree of assurance that they will consistently achieve a high level of performance in a given application and meet the needs of the industry that they have been specifically designed for.

- Wide choice of filtration media and filter formats
- Technical and validation support
- Industry and application specific filters
- Fully retrofitable range of products
- Manufactured in state-of-the-art facilities

**Scaleability provides flexibility**  
The ability to scale up from small area discs to final manufacturing with minimal revalidation is paramount.

Parker domnick hunter provides a wide range of filter formats to ensure that the transition from pilot scale through to full production is as smooth as possible.

**Single use systems**  
Disposable systems can eliminate cleaning validation, reduce capital costs, minimise health & safety risks and lower the chance of product contamination. Single use systems also provide a more convenient way of processing a product.

**Close working relationships**  
Parker domnick hunter have partnered engineering companies on large scale projects around the world that require filtration expertise and dedicated technical support.

**Committed to process improvement**  
Direct access to our teams from new product development, laboratory services, technical support, manufacturing and quality provide the right solution delivered to you on time, every time.

Our goal is to continually improve your productivity, reduce your process costs and ensure the safety of your final product. Our Technical Support Group (TSG) made up from a multidisciplinary team of scientists and engineers working directly with your team to define your process needs and produce optimised solutions.



# Single Cartridge Housings

5" to 40" cartridges



## **HSA - Sanitary air / gas housing**

High specification air housing

## **HBA - Industrial air / gas housing**

Specifically designed for the food & beverage industry

## **HSV - Vent housing**

Flow efficient, self supportive sanitary housing

## **HSL - Sanitary liquid housing**

Food, beverage & pharmaceutical finishes available

## **HSI - In-line sanitary liquid housing**

Food, beverage & pharmaceutical finishes available

## **HIL - Industrial air / liquid housing**

Ideal for water treatment & chemical applications



# HSA Filter Housing

- sanitary air / gas

- Flow efficient sanitary range of air / gas housings
- Designed specifically for the food and beverage industry
- Sanitary vent, tri-clamp and drain connections as standard
- Sanitary tri-clamp body closure as standard



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

### Surface Finish

- Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- All finishes pickled & passivated.

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

### Certification

Supplied as standard with vessel inspection certificate.

### Material Test Certification

EN10204 3.1 supplied upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

PED / PER conformity assessments based on Fluid Group 2 Gas (harmless) including steam. Only housings over PS.V 50 bar / litres bear the CE mark.

### Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure		
Fluid Group	State	Temperature	01K	011	012
Non Dangerous	Gas / Vapour	150 °C [302 °F]	10.00 barg [145.03 psig]	10.00 barg [145.03 psig]	10.00 barg [145.03 psig]
Dangerous	Gas / Vapour	150 °C [302 °F]	8.00 barg [116.03 psig]	8.00 barg [116.03 psig]	8.00 barg [116.03 psig]
PED Conformity Assessment Category			SEP	SEP	SEP
Volume (litres)			1.9	3.1	5.0

## Physical Characteristics

Bowl Height	Dimensions (mm)			Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
5" (125 mm)	157	337	194	1.0	3.5	5.1
10" (250 mm)	157	487	313	1.6	3.5	5.7
20" (500 mm)	157	737	561	2.6	3.5	6.7

Dimensions are based on illustration shown (HSACE011YT-C-S). For accurate dimensions, please contact Parker domnick hunter.

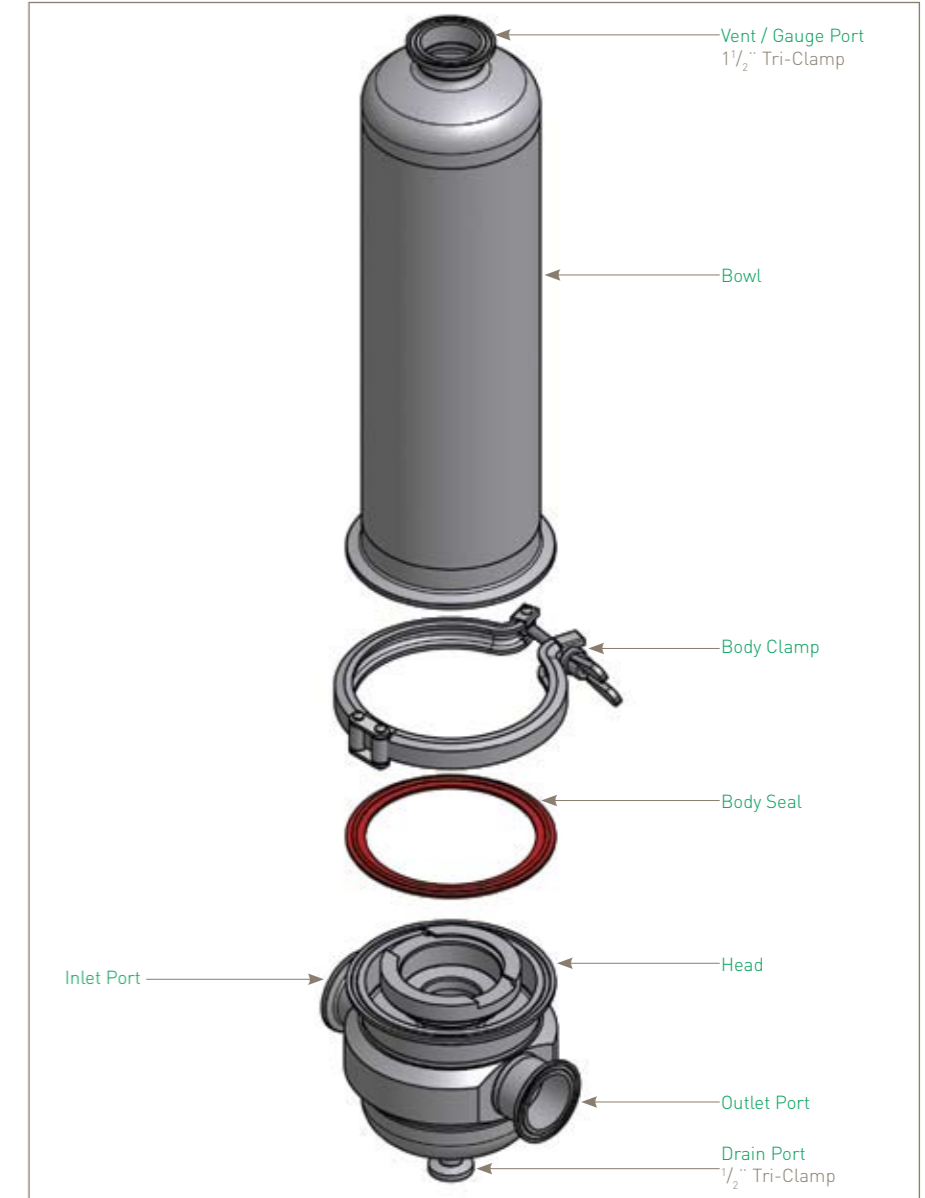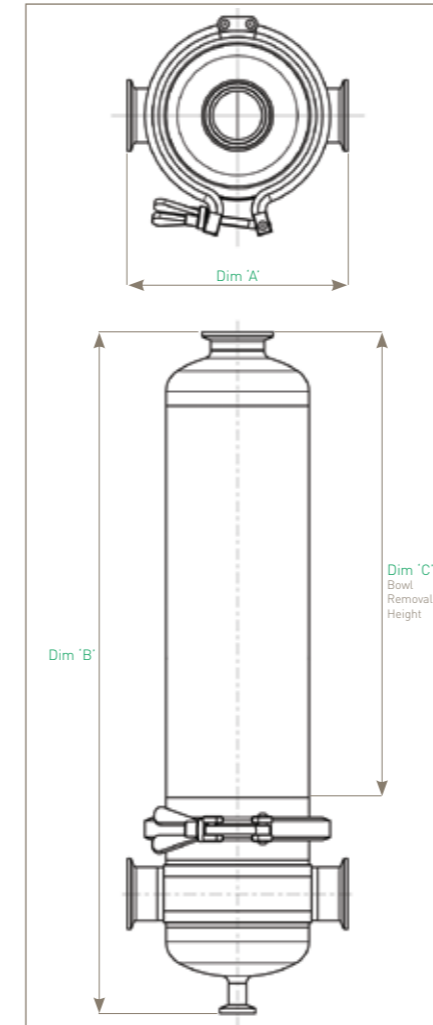

## Ordering Information

HSA  01   -  -

Code	Vessel Class	Code	Length (Nominal)	Code	Connection Size	Code	Standard	Code	Cartridge	Code	Seal
CE	Standard	K	5" (125 mm)	Y	1 1/2" (38.1 mm)	T	Tri-Clamp	C	226	S	Silicone
		1	10" (250 mm)								
		2	20" (500 mm)								

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSA® datasheet for more information.





# HBA Filter Housing

- industrial air / gas

- Flow efficient range of air / gas housings
- Designed to maximise flow and minimise pressure drop
- Designed specifically for the food and beverage industry



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA
- Vent / Drain Seals: PTFE

### Surface Finish

- Internal: As Welded
  - External: Polished 0.8 µm Ra
- All finishes pickled & passivated.

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

### Certification

Supplied as standard with vessel inspection certificate.

### Material Test Certification

EN10204 3.1 supplied upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

PED / PER conformity assessments based on Fluid Group 2 Gas (harmless) including steam. Only housings over PS.V 50 bar / litres bear the CE mark.

### Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure		
Fluid Group	State	Temperature	01K	011	012
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	150 °C (302 °F)	8.00 barg (116.03 psig)	8.00 barg (116.03 psig)	8.00 barg (116.03 psig)
PED Conformity Assessment Category			SEP	SEP	CAT I
Volume (litres)			2.5	3.7	5.6

## Physical Characteristics

Bowl Height	Dimensions (mm)			Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
5" (125 mm)	231	396	223	0.9	1.9	3.6
10" (250 mm)	231	546	342	1.5	1.9	4.1
20" (500 mm)	231	796	590	2.5	1.9	5.2

Dimensions are based on illustration shown (HBACE011YB-C-S). For accurate dimensions, please contact Parker domnick hunter.

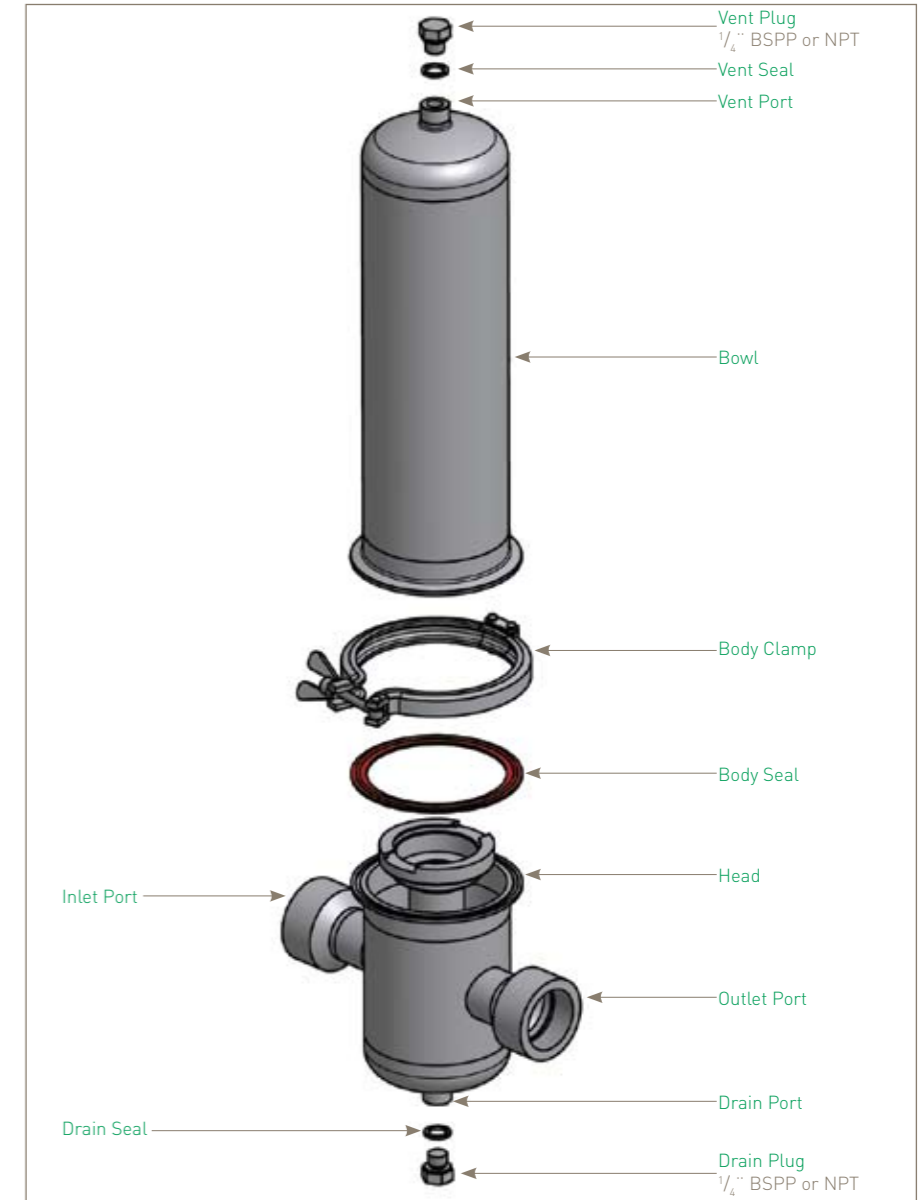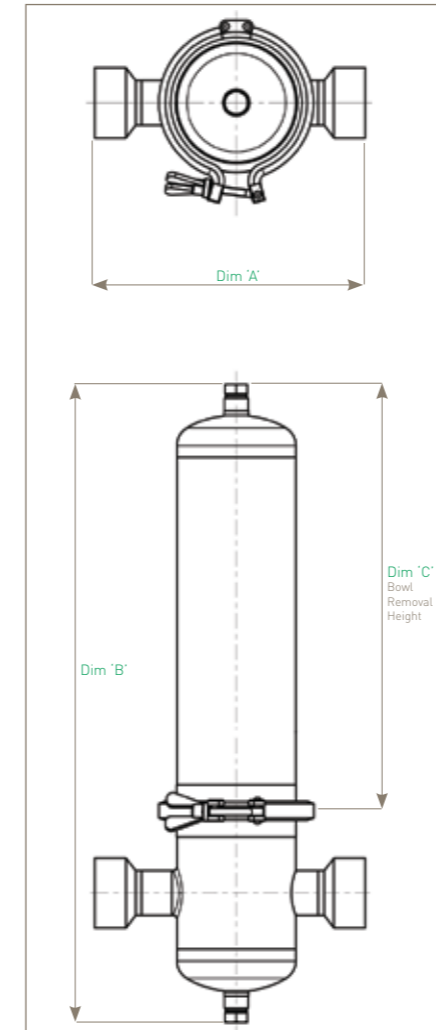

## Ordering Information

HBA  01   -  -

Code	Vessel Class	Code	Length (Nominal)	Code	Connection Size	Code	Standard	Code	Cartridge	Code	Seal
CE	Standard	K	5" (125 mm)	Y	1 1/2" (38.1 mm)	B	BSPP	C	226	S	Silicone
		1	10" (250 mm)			N	NPT				
		2	20" (500 mm)								

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HBA® datasheet for more information.

## HBA Filter Housing

- industrial air / gas



- Flow efficient range of air / gas housings
- Available in 4 different housing classes: ATEX, CE, High Pressure and Oxygen Service
- Beverage, pharmaceutical and industrial surface finishes available
- A number of inlet / outlet port connections
- Wide range of vent and drain options

### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA

#### Surface Finish

- Industrial Finish
  - Internal: As Welded
  - External: Pickled & Passivated
- Beverage Finish
  - Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- Pharmaceutical Finish
  - Internal: Polished 0.4 µm Ra and Electropolished
  - External: Polished 0.25 µm Ra

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis

ASME VIII Division 1. ATEX 94/9/EC (where applicable)

ATEX Working Condition PED 97/23/EC				Maximum Pressure				
Fluid Group	State	Temperature		01K	011	012	013	014
Non Dangerous	Gas / Vapour	135 °C (275 °F)		10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	135 °C (275 °F)		8.00 barg (116.03 psig)	8.00 barg (116.03 psig)	8.00 barg (116.03 psig)	6.60 barg (95.72 psig)	5.30 barg (76.87 psig)
PED Conformity Assessment Category				SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)				2.5	3.7	5.6	7.5	9.4

CE Working Condition PED 97/23/EC				Maximum Pressure				
Fluid Group	State	Temperature		01K	011	012	013	014
Non Dangerous	Gas / Vapour	150 °C (302 °F)		10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	150 °C (302 °F)		8.00 barg (116.03 psig)	8.00 barg (116.03 psig)	8.00 barg (116.03 psig)	6.60 barg (95.72 psig)	5.30 barg (76.87 psig)
PED Conformity Assessment Category				SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)				2.5	3.7	5.6	7.5	9.4

High Pressure Working Condition PED 97/23/EC				Maximum Pressure				
Fluid Group	State	Temperature		01K	011	012	013	014
Non Dangerous	Gas / Vapour	205 °C (401 °F)		16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
PED Conformity Assessment Category				SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)				2.5	3.7	5.6	7.5	9.4



  

Oxygen Service Working Condition PED 97/23/EC				Maximum Pressure				
Fluid Group	State	Temperature		01K	011	012	013	014
Dangerous	Gas / Vapour	150 °C (302 °F)		8.00 barg (116.03 psig)	8.00 barg (116.03 psig)	8.00 barg (116.03 psig)	6.60 barg (95.72 psig)	5.30 barg (76.87 psig)
PED Conformity Assessment Category				SEP	CAT I	CAT I	CAT I	CAT I
Volume (litres)				2.5	3.7	5.6	7.5	9.4

### Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
5" (125 mm)	259	398	223	1.0	5.4	7.0
10" (250 mm)	259	548	342	1.6	5.4	7.6
20" (500 mm)	259	798	590	2.6	5.4	8.6
30" (750 mm)	259	1043	838	3.6	5.4	9.6
40" (1000 mm)	259	1293	1068	4.6	5.4	10.6

Dimensions shown are for a vessel with 1 1/2" BS4504 DIN2633 ports, 1/2" BSPP vent and drain. For other formats, please contact Parker domnick hunter.

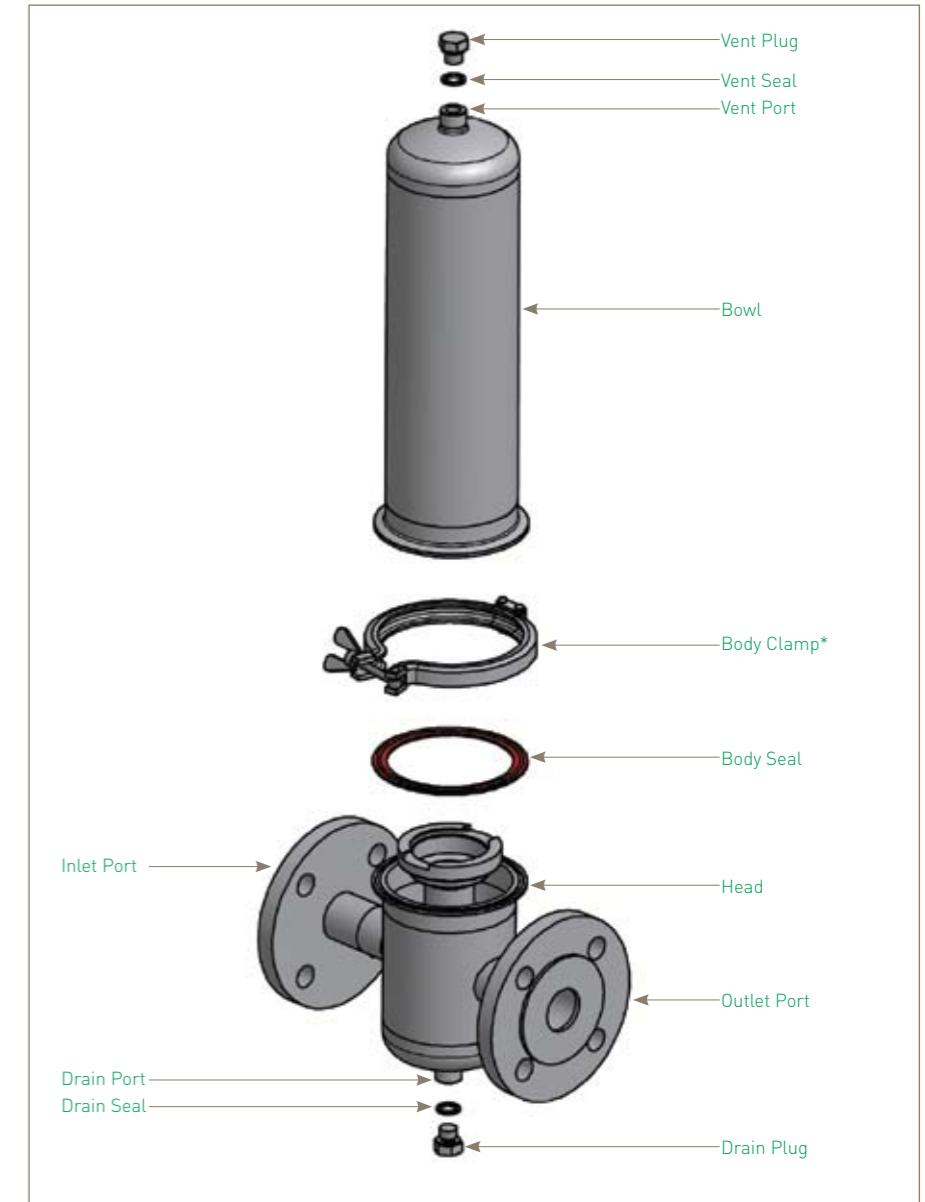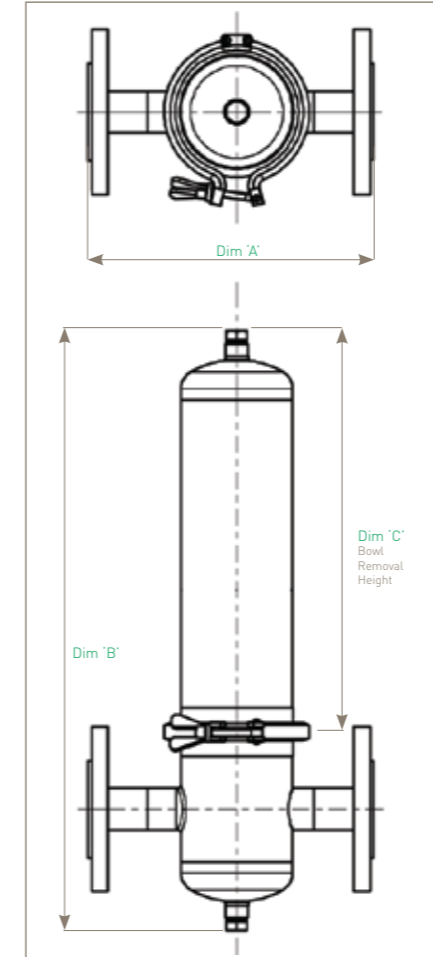

\*Double bolted clamp required for HP and PTFE seal options

### Ordering Information

**HBA** [ ] 01 [ ] [ ] [ ] [ ] [ ] - [ ] [ ] - [ ] [ ]

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Vent	Code   Drain
AT ATEX	K 5" (125 mm)	Y 1 1/2" (38.1 mm)	B BSPP (F)	C 226	E EPDM	B 1/4" BSPP (F)	B G 1/4" BSPP
CE Standard	1 10" (250 mm)	C 2" (50.8 mm)	D DIN11851(M)		P* PTFE	C Rectus 21 Vertical <sup>(2)</sup>	N G 1/4" NPT
HP* High Pressure	2 20" (500 mm)		F ANSI RF 150 <sup>(1)</sup>		S Silicone	H 1 1/2" TCF & Hosebarb <sup>(2)</sup>	H Hosebarb
OX Oxygen Service	3 30" (750 mm)		H ANSI RF 300		V Viton	I 1 1/2" TCF & Staubli RBE03 <sup>(2)</sup>	R Rectus 21
	4 40" (1000 mm)		L BS4504 DIN2633			M 1 1/2" TCF & 1/2" TCF <sup>(2)</sup>	S Staubli RBE03
			M* SMS Pipe (3008)			N 1/2" NPT (F)	T 1/2" TCF
			T Tri-Clamp			R 1 1/2" TCF & Rectus 21 <sup>(2)</sup>	
			W ISO / BS Pipe			S Staubli RBE03 Vertical	
						T 1 1/2" TCF Only <sup>(2)</sup>	

Code   Surface Finish	Internal	External
B Beverage	0.4 µm	0.25 µm
I Industrial	As Welded	0.8 µm
P Pharmaceutical	0.4 µm EP	0.25 µm

Code   Tagged	Yes	No
T	Yes	No
X	No	Yes

<sup>(1)</sup> Not suited for High Pressure Vessels. HP Vessels to use ANSI RF 300. \* SMS 1.12" = 38.00 x 1.2 THK SMS 2" = 51.00 x 1.2 THK

<sup>(2)</sup> Not available in Industrial Finish.

For Tagged Options customer identification numbers required at time of ordering

# HSV Filter Housing

- vent applications

- Vent housings
- Direct connection to tank boss allows housing to be self-supportive
- Corrosion resistant 316L stainless steel
- Easy assembly and maintenance



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

### Surface Finish

- Internal: Polished 0.8 µm Ra
  - External: As welded
- All finishes pickled & passivated.*

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. *Weld finish & detail drawings available upon request.*

### Certification

Supplied as standard with vessel inspection certificate.

### Material Test Certification

EN10204 3.1 supplied upon request.

### Recommended Operation Guidelines Sizing

Sizing vent vessels particularly for vacuum sensitive tanks can require specialist advice. It is important that VENT housings are sized on maximum gas flow capacity under actual operation conditions.



### Vacuum Protection

Where a tank is vacuum sensitive, there is a risk of tank collapse. In such cases the fitting of an appropriately rated bursting disc (or similar) and, if necessary a pressure relief valve, is highly recommended.

## Physical Characteristics

Bowl Height	Dimensions (mm)			Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
5" (125 mm)	132	242	194	0.9	0.7	2.2
10" (250 mm)	132	392	313	1.5	0.7	2.8
20" (500 mm)	132	642	561	2.5	0.7	3.8

*Dimensions are based on illustration shown (HSV011YT-C-S). For accurate dimensions, please contact Parker domnick hunter.*

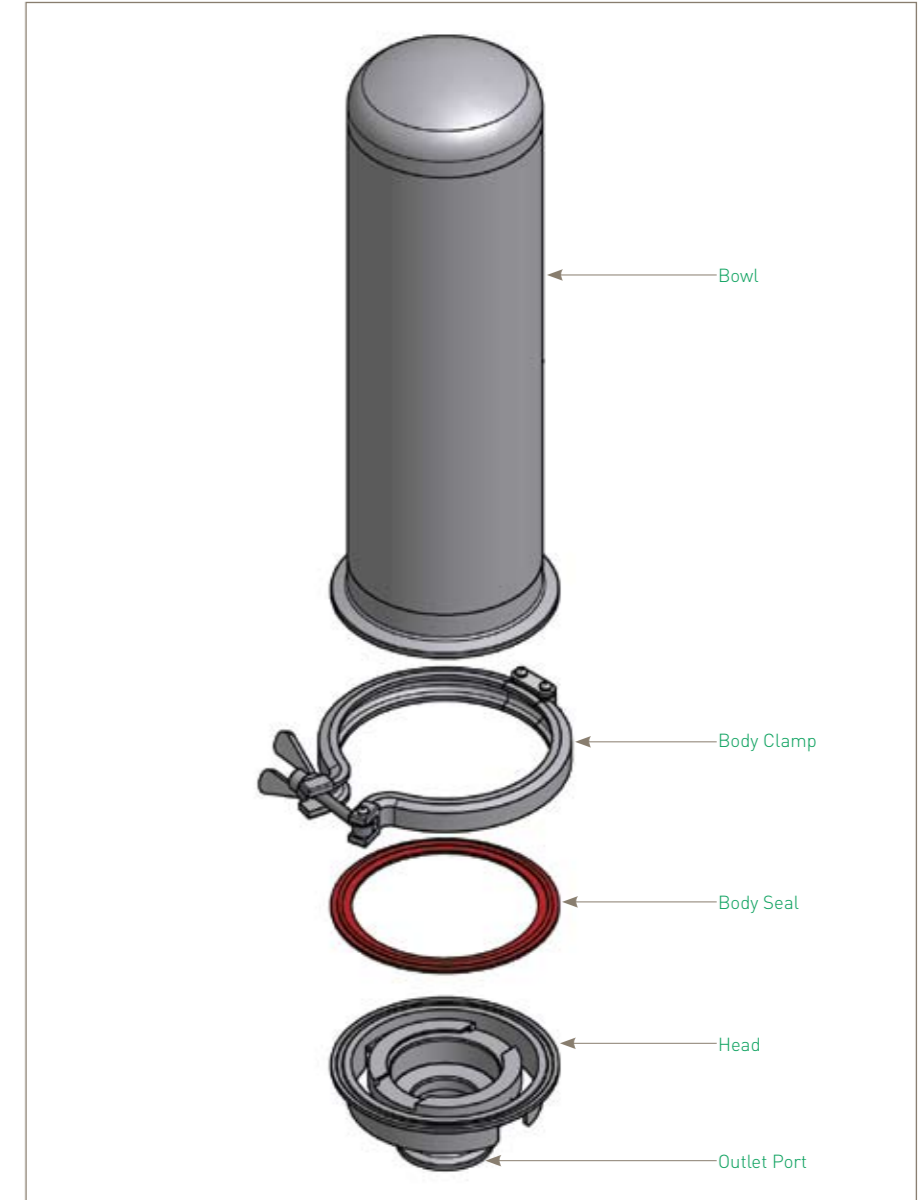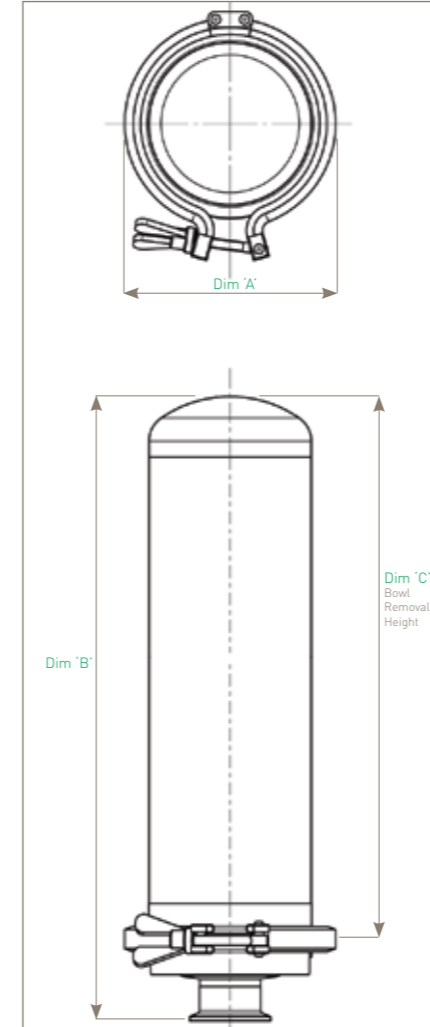

## Ordering Information

HSV  01   -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
DH Vent Housing	K 5" (125 mm) 1 10" (250 mm) 2 20" (500 mm)	Y 1 1/2" (38.1 mm)	T Tri-Clamp	C 226	S Silicone

*Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.*

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSV@ datasheet for more information.

# HSV<sup>+</sup> Filter Housing

- industrial vent



- Industrial vent housings
- Available in ATEX version
- Beverage, pharmaceutical and industrial surface finishes available
- Available in various connection types

## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA

Note: Seal used only to position bowl clamp arrangement.

Working Condition PED 97/23/EC			Volume [litres]				
Variant	State	Temperature	01K	011	012	013	014
Standard	Gas / Vapour	150 °C [302 °F]	1.6	2.8	4.7	6.6	8.5
ATEX	Gas / Vapour	135 °C [275 °F]	1.6	2.8	4.7	6.6	8.5

### Surface Finish

- Industrial Finish
  - Internal: As Welded, Pickled & Passivated
  - External: Polished 0.8 µm Ra
- Beverage Finish
  - Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- Pharmaceutical Finish
  - Internal: Polished 0.4 µm Ra and Electropolished
  - External: Polished 0.25 µm Ra

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.



### Design Basis

ATEX 94/9/EC (where applicable)

## Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
5" (125 mm)	132	274	194	0.9	2.6	4.0
10" (250 mm)	132	424	313	1.5	2.6	4.6
20" (500 mm)	132	674	561	2.5	2.6	5.6
30" (750 mm)	132	919	809	3.5	2.6	6.6
40" (1000 mm)	132	1169	1057	4.5	2.6	7.6

Dimensions shown are for a vessel with 1 1/2" BS4504 DIN 2633 outlet port. For other formats, please contact Parker domnick hunter.

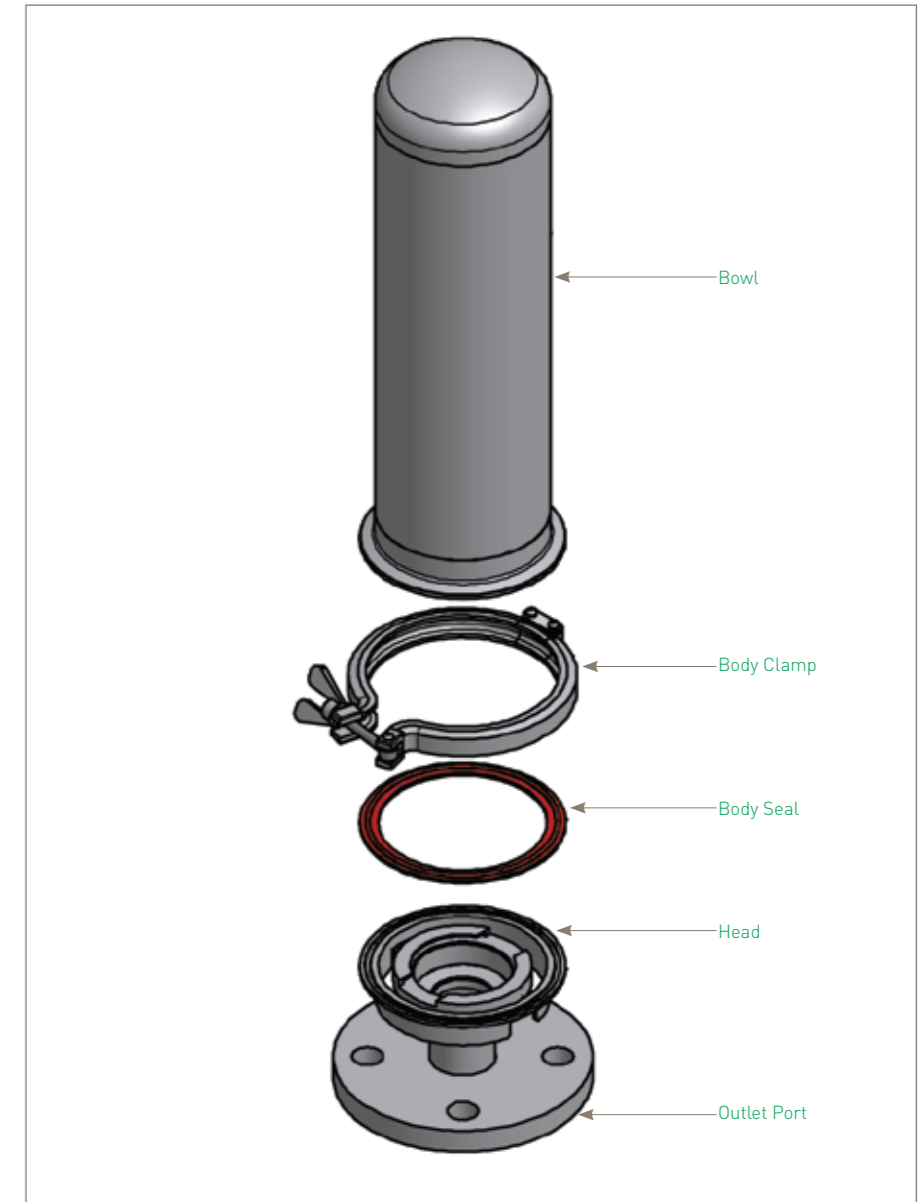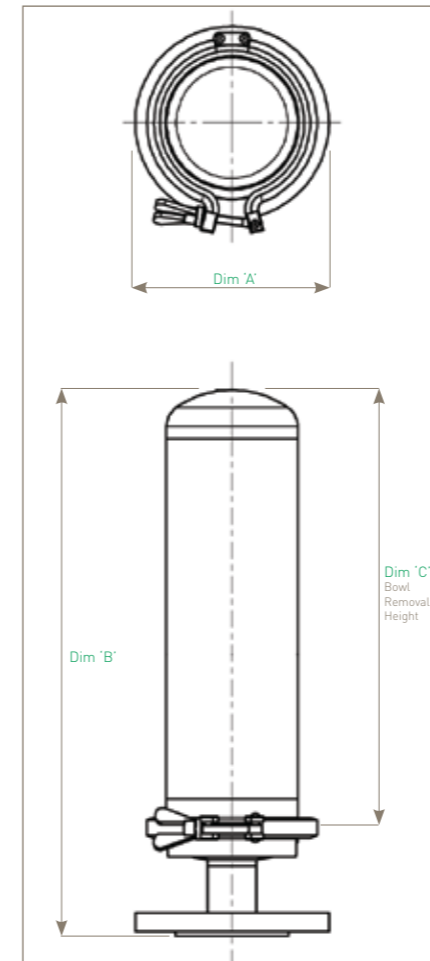

## Ordering Information

HSV	01									
Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Surface Finish	Internal	External	Code   Tagged	
DH Standard AT ATEX	K 5" (125 mm) 1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm) 4 40" (1000 mm)	C 2" (50.8 mm) Y 1 1/2" (38.1 mm)	B BSPP (F) D DIN11851(M) F ANSI RF150 L BS4504 DIN2633 N NPT (F) T Tri-Clamp W BS / ISO Pipe	C 226	E EPDM P PTFE S Silicone V Viton	B Beverage I Industrial P Pharmaceutical	0.4 µm As Welded 0.4 µm EP	0.25 µm 0.8 µm 0.25 µm	T Yes X No	

For Tagged Options customer identification numbers required at time of ordering

# HSL Filter Housing

- sanitary liquid

- Single element sanitary liquid housing
- Designed specifically for the food and beverage and pharmaceutical industry
- Sanitary vent and tri-clamp connections as standard
- Sanitary tri-clamp body closure as standard



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

### Surface Finish

- Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- All finishes pickled & passivated.

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

### Certification

Supplied as standard with vessel inspection certificate.

### Material Test Certification

EN10204 3.1 supplied upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

PED / PER conformity assessments based on Fluid Group 2 Gas (harmless) including steam. Only housings over PS.V 50 bar / litres bear the CE mark.

### Design Basis


ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure		
Fluid Group	State	Temperature	011	012	013
Non Dangerous	Liquid / Gas	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid / Gas	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	SEP	CAT I
Volume (litres)			2.9	4.8	6.7

## Physical Characteristics

Bowl Height	Dimensions (mm)			Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
10" (250 mm)	156	417	313	1.0	1.5	3.8
20" (500 mm)	156	667	561	1.6	1.5	4.8
30" (750 mm)	156	912	809	2.6	1.5	5.7

Dimensions are based on illustration shown (HSLCE011BT-C-S). For accurate dimensions, please contact Parker domnick hunter.

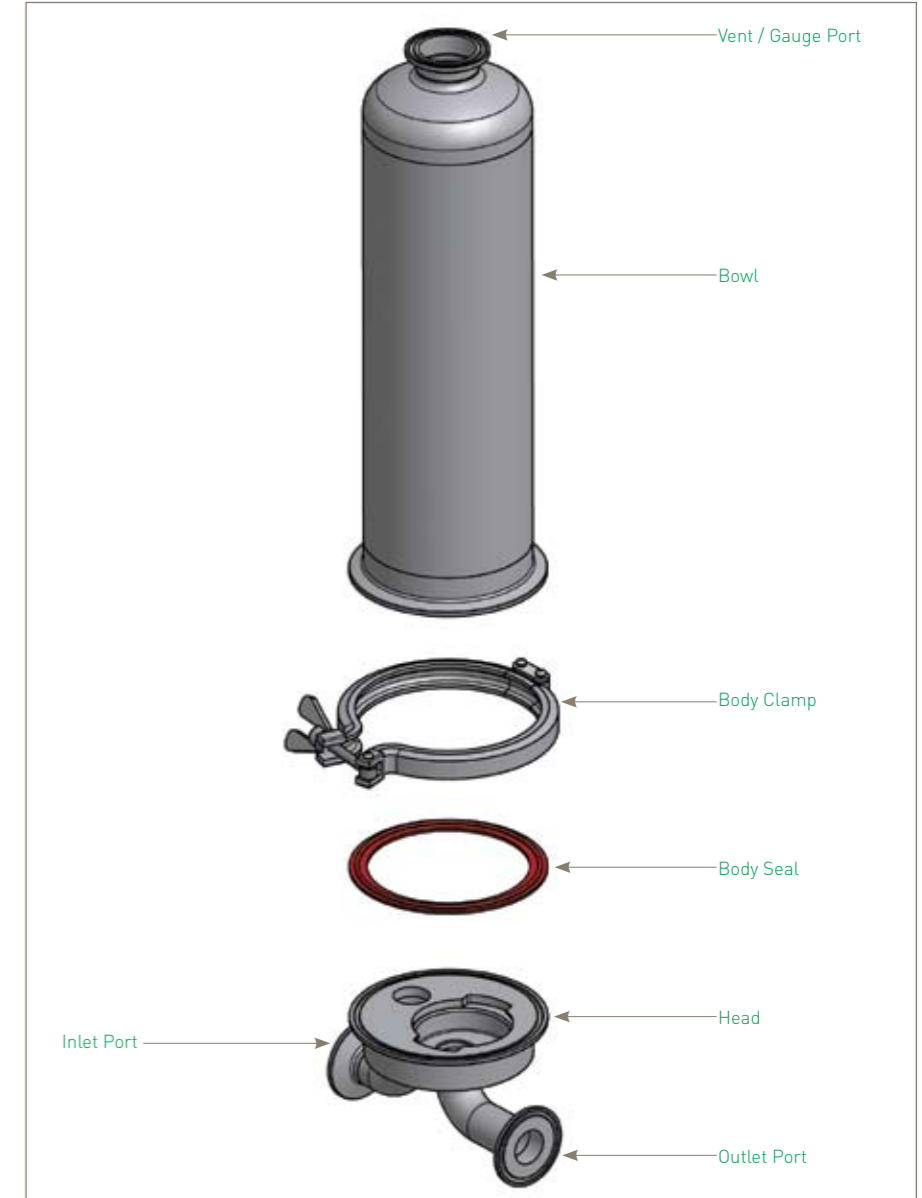

## Ordering Information

HSL  01   -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
CE Standard	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm)	B 1" (25.4 mm)	T Tri-Clamp	C 226	S Silicone

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSL® datasheet for more information.

# HSL<sup>+</sup> Filter Housing

- sanitary liquid



- Single element sanitary liquid housings
- Available in 3 different housing classes: ATEX, CE and High Pressure
- Both beverage and pharmaceutical surface finishes available
- Wide range of connection, vent and drain options available



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA

### Surface Finish

- Beverage Finish: Internal: Polished 0.4 µm Ra, External: Polished 0.25 µm Ra

### Pharmaceutical Finish

- Pharmaceutical Finish: Internal: Polished 0.4 µm Ra and Electropolished, External: Polished 0.25 µm Ra

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

### Design Basis

ASME VIII Division 1. ATEX 94/9/EC (where applicable)

ATEX Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	01K	011	012	013	014
Non Dangerous	Gas / Vapour	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	135 °C (275 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
Non Dangerous	Liquid	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	135 °C (275 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I
Volume (litres)			1.7	2.9	4.8	6.7	8.6

CE Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	01K	011	012	013	014
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
Non Dangerous	Liquid	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I
Volume (litres)			1.7	2.9	4.8	6.7	8.6



High Pressure Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	01K	011	012	013	014
Non Dangerous	Gas / Vapour	205 °C (401 °F)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
	Liquid		16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
PED Conformity Assessment Category			SEP	SEP	CAT I	CAT I	CAT I
Volume (litres)			1.7	2.9	4.8	6.7	8.6

# HSL<sup>+</sup> Filter Housings

## Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)		
	'A'	'B'	'C'	Bowl Head	Total	
5" (125 mm)	330	321	194	0.9	1.9	3.3
10" (250 mm)	330	472	315	1.5	1.9	3.9
20" (500 mm)	330	722	561	2.5	1.9	4.9
30" (750 mm)	330	967	809	3.5	1.9	5.9
40" (1000 mm)	330	1217	1057	4.5	1.9	6.9

Dimensions shown are for a vessel with 1" tri-clamp ports and inlet/outlet drains. For other formats, please contact Parker domnick hunter.

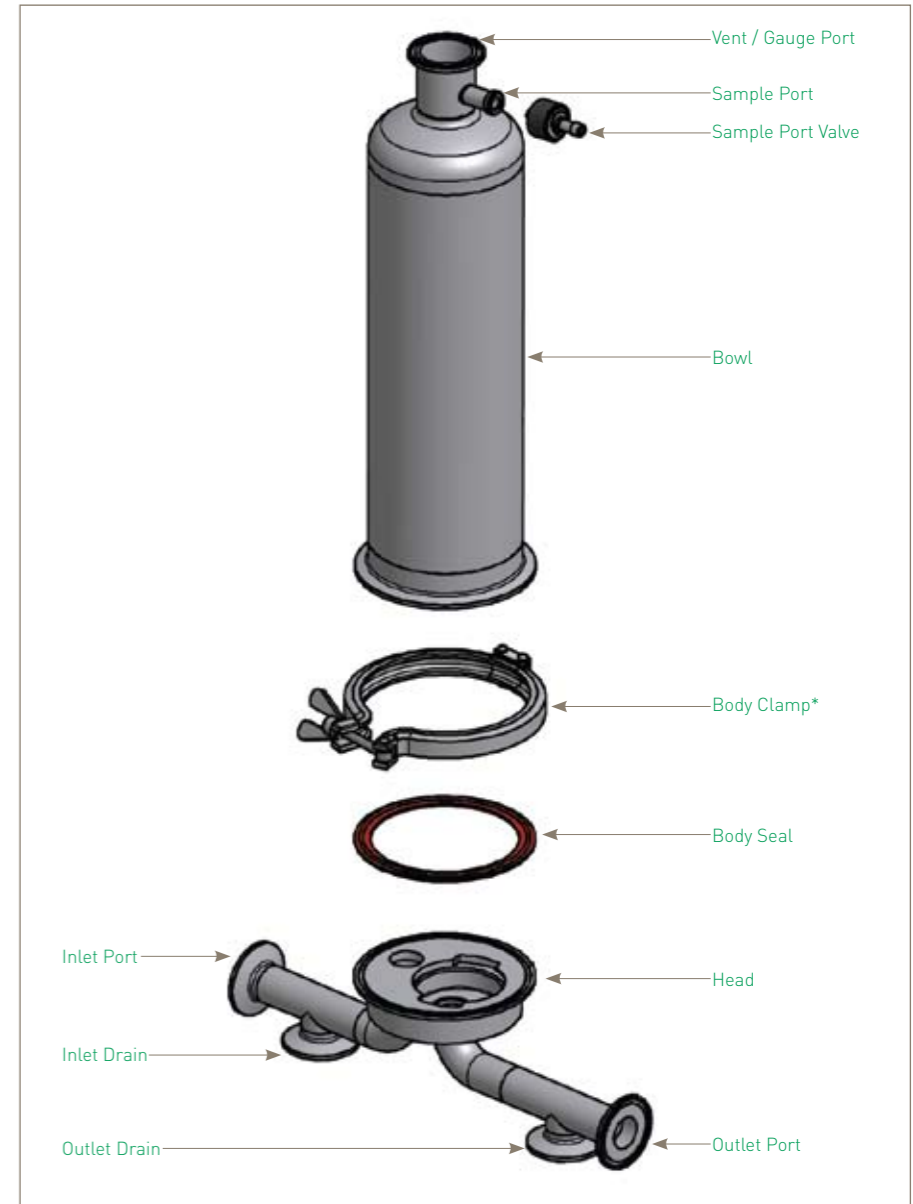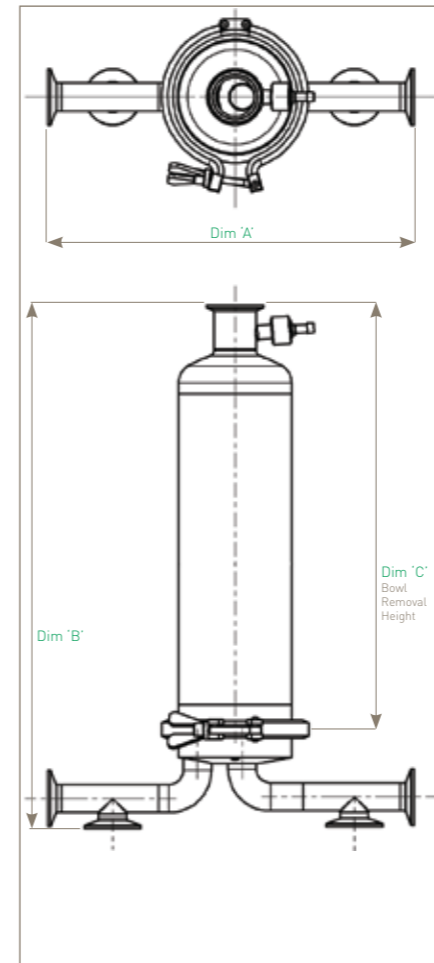

\*Double bolted clamp required for HP and PTFE seal options

## Ordering Information

HSL  01      -  -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Vent	Code   Drain
AT ATEX	K 5" (125 mm)	B 1" (25.4 mm)	D DIN11851(M)	C 226	E EPDM	A 1/2" TCF & 2 x Rectus 21	H Hosebarb Inlet Only
CE Standard	1 10" (250 mm)		F ANSI RF 150 <sup>(1)</sup>		P* PTFE	B 1/2" TCF & 2 x Staubli RBE03	R Rectus 21 Inlet Only
HP* High Pressure	2 20" (500 mm)		H ANSI RF 300		S Silicone	H 1/2" TCF & Hosebarb	S Staubli RBE03
	3 30" (750 mm)		L BS4504		V Viton	I 1/2" TCF & Staubli RBE03	X No Drain
	4 40" (1000 mm)		DIN2633			M 1/2" TCF & 1/2" TCF	Y 1" TCF Inlet Only
			R RJT(M)			R 1/2" TCF & Rectus 21	Z 1" TCF Inlet & Outlet
			S SMS Union (M)			S Staubli RBE03 Vertical	
			T Tri-Clamp			T 1/2" TCF Only	
			W ISO / BS Pipe				

<sup>(1)</sup> Not suited for High Pressure Vessels. HP Vessels to use ANSI RF 300.

Code   Surface Finish	Internal	External
B Beverage	0.4 µm	0.25 µm
P Pharmaceutical	0.4 µm EP	0.25 µm

Code | Tagged  
T Yes  
X No

For Tagged Options customer identification numbers required at time of ordering

# HSI Filter Housing

- in-line sanitary liquid



- In-line sanitary liquid housing
- High quality crevice free construction
- Sanitary body closure as standard

## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

### Surface Finish

- Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- All finishes pickled & passivated.

### Welding

All assembly welds are full penetration.  
All welds are crevice and undercut free.  
*Weld finish & detail drawings available upon request.*

### Certification

Supplied as standard with vessel inspection certificate.

### Material Test Certification

EN10204 3.1 supplied upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

PED / PER conformity assessments based on Fluid Group 2 Gas (harmless) including steam. Only housings over PS.V 50 bar / litres bear the CE mark.

### Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure		
Fluid Group	State	Temperature	011	012	013
Non Dangerous	Liquid / Gas	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid / Gas	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	SEP	CAT I
Volume (litres)			2.8	4.7	6.6

## Physical Characteristics

Bowl Height	Dimensions (mm)			Weight (Kg)		
	'A'	'B'	'C'	Bowl Head	Total	
10" (250 mm)	132	449	313	1.0	1.5	3.6
20" (500 mm)	132	699	561	1.6	1.5	4.6
30" (750 mm)	132	944	809	2.6	1.5	5.6

Dimensions are based on illustration shown (HSICED11YT-C-S).  
For accurate dimensions, please contact Parker domnick hunter.

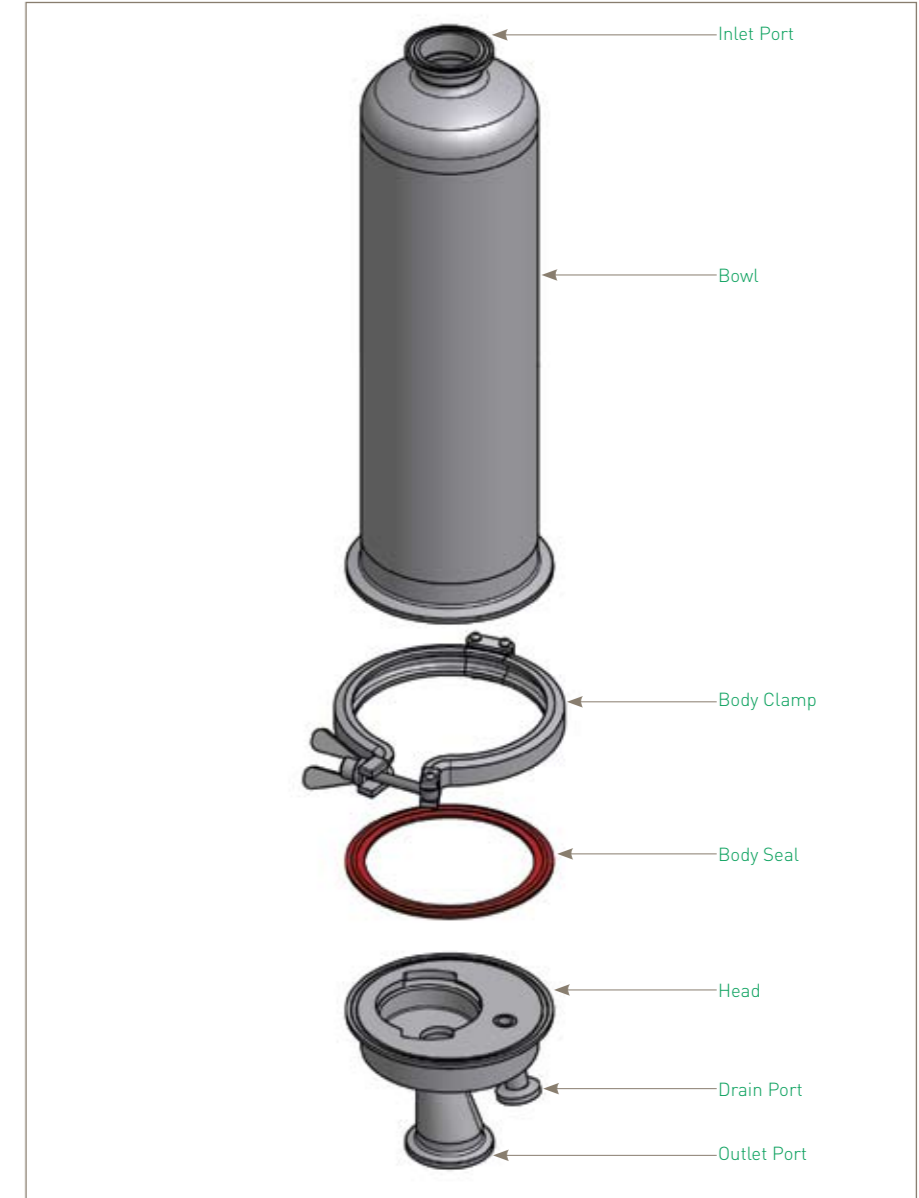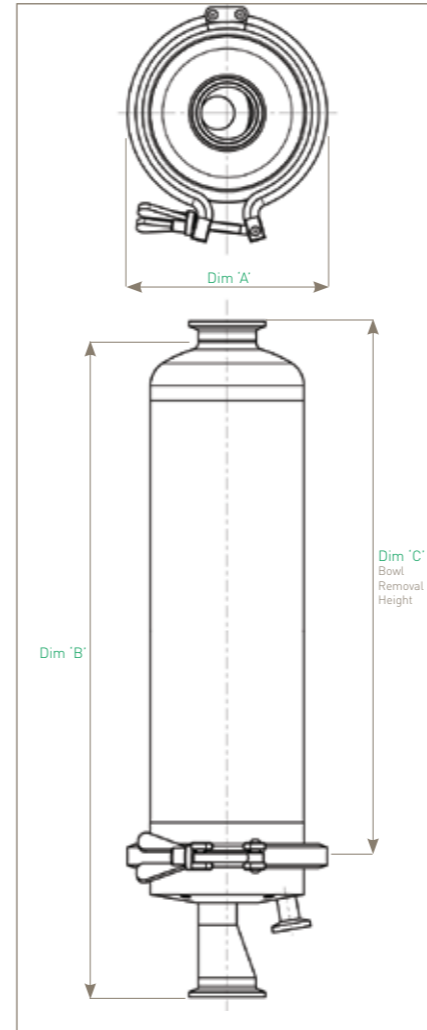

## Ordering Information

HSI  01   -  -

Code	Vessel Class	Code	Length (Nominal)	Code	Connection Size	Code	Standard	Code	Cartridge	Code	Seal
CE	Standard	1	10" (250 mm)	Y	1/2" (38.1 mm)	T	Tri-Clamp	C	226	S	Silicone
		2	20" (500 mm)								
		3	30" (750 mm)								

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSI® datasheet for more information.

# HSI⊕ Filter Housing

- in-line sanitary liquid

- In-line sanitary liquid housing
- Available in 3 different housing classes: ATEX, CE and High Pressure
- Both beverage and pharmaceutical surface finishes available
- Sampling and drain port options



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA

### Surface Finish

- Beverage Finish: Internal: Polished 0.4 µm Ra, External: Polished 0.25 µm Ra
- Pharmaceutical Finish: Internal: Polished 0.4 µm Ra and Electropolished, External: Polished 0.25 µm Ra

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

### Design Basis

ASME VIII Division 1. ATEX 94/9/EC (where applicable)

ATEX Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	01K	011	012	013	014
Non Dangerous	Gas / Vapour	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	135 °C (275 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
Non Dangerous	Liquid	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	135 °C (275 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I
Volume (litres)			1.6	2.8	4.7	6.6	8.5



CE Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	01K	011	012	013	014
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
Non Dangerous	Liquid	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	SEP	SEP	CAT I	CAT I
Volume (litres)			1.6	2.8	4.7	6.6	8.5

High Pressure Working Condition PED 97/23/EC			Maximum Pressure				
Fluid Group	State	Temperature	01K	011	012	013	014
Non Dangerous	Gas / Vapour	205 °C (401 °F)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
	Liquid						
PED Conformity Assessment Category			SEP	SEP	CAT I	CAT I	CAT I
Volume (litres)			1.6	2.8	4.7	6.6	8.5

## Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
5" (125 mm)	132	327	194	0.9	1.5	2.9
10" (250 mm)	132	477	313	1.5	1.5	3.5
20" (500 mm)	132	727	561	2.5	1.5	4.5
30" (750 mm)	132	972	809	3.5	1.5	5.5
40" (1000 mm)	132	1222	1057	4.5	1.5	6.5

Dimensions shown are for a vessel with a vent sample port. For other formats, please contact Parker domnick hunter.

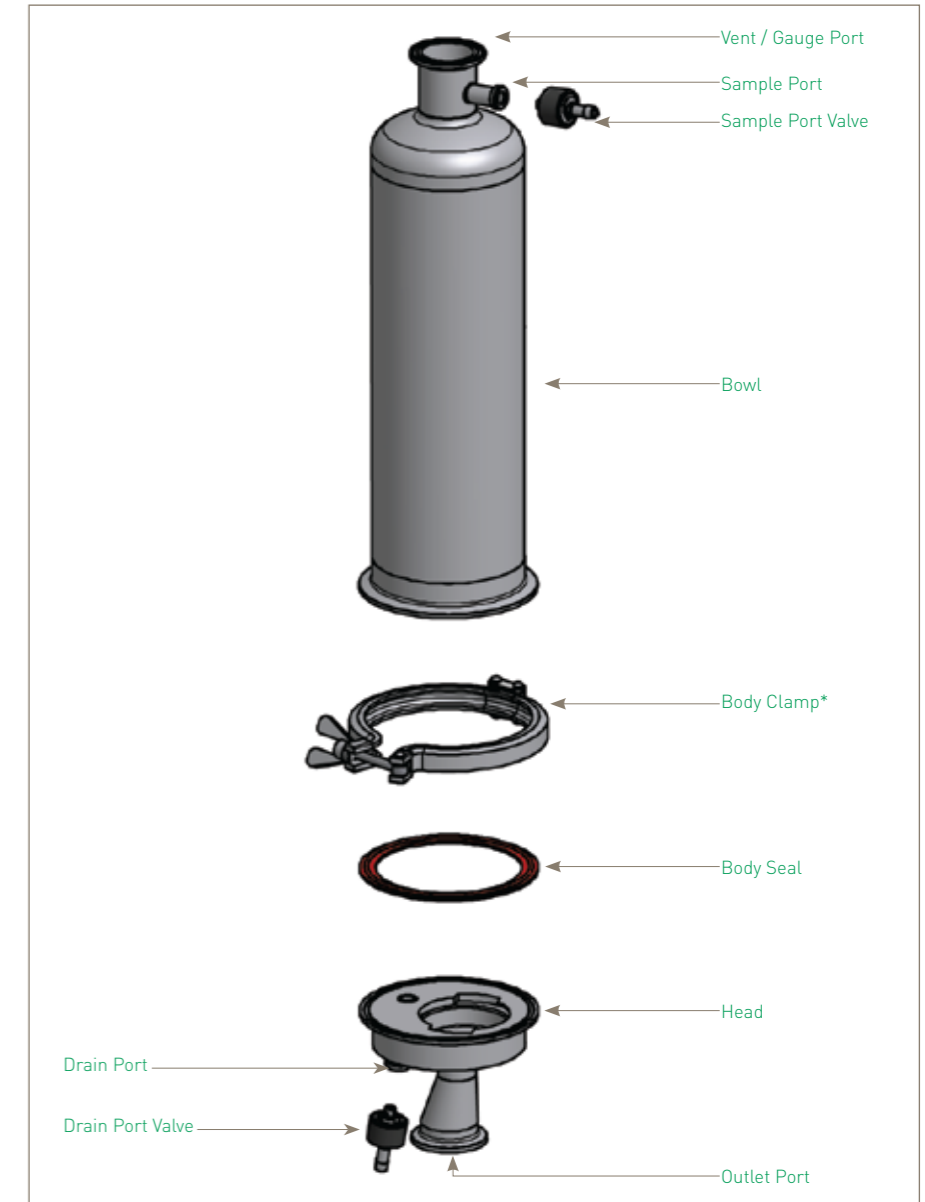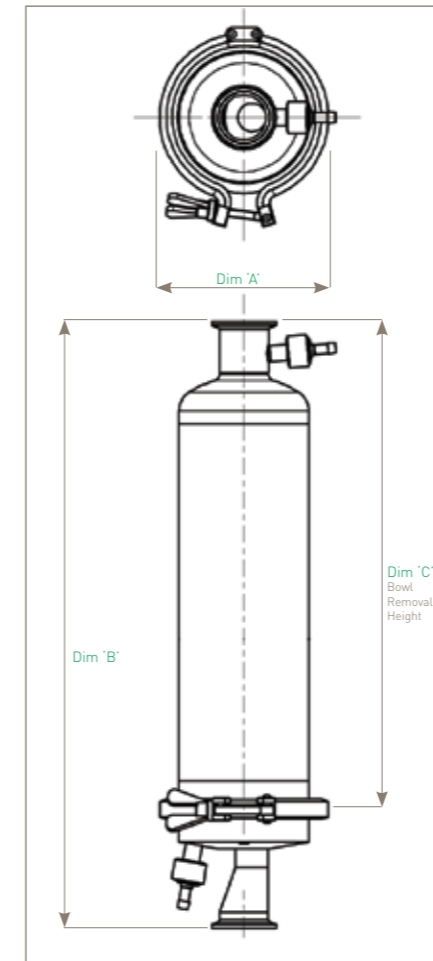

\*Double bolted clamp required for HP and PTFE seal options

## Ordering Information

**HSI**  **01**      -

Code   Vessel Class		Code   Length (Nominal)		Code   Connection Size		Code   Standard		Code   Cartridge		Code   Seal		Code   Vent		Code   Drain	
AT	ATEX	K	5" (125 mm)	Y	1 1/2" (38.1 mm)	T	Tri-Clamp	C	226	E	EPDM	H	1 1/2" TCF & Hosebarb	H	Hosebarb
CE	Standard	1	10" (250 mm)							P*	PTFE	I	1 1/2" TCF & Staubli RBE03	R	Rectus 21
HP*	High Pressure	2	20" (500 mm)							S	Silicone	M	1 1/2" TCF & 1/2" TCF	S	Staubli RBE03
		3	30" (750 mm)							V	Viton	R	1 1/2" TCF & Rectus 21	T	1/2" TCF
		4	40" (1000 mm)									X	No Vent	X	No Drain

\* Supplied complete with a double bolted clamp. \* Double bolted clamp required.

Code   Surface Finish		Internal	External
B	Beverage	0.4 µm	0.25 µm
P	Pharmaceutical	0.4 µm EP	0.25 µm

Code   Tagged	
T	Yes
X	No

For Tagged Options customer identification numbers required at time of ordering



# HIL Filter Housing

- industrial liquid



- Industrial single element liquid housing
- 1" BSPP or NPT inlet / outlet standard connections
- Suitable replacement for plastic housings
- Suitable for cartridge types DOE or 222

## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA

### Surface Finish

- Internal: As Welded
  - External: Polished 0.8 µm Ra
- All finishes pickled & passivated.*

### Welding

All assembly welds are full penetration.  
All welds are crevice and undercut free.  
*Weld finish & detail drawings available upon request.*

### Certification

Supplied as standard with vessel inspection certificate.

### Material Test Certification

EN10204 3.1 supplied upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

PED / PER conformity assessments based on Fluid Group 2 Gas (harmless) including steam. Only housings over PS.V 50 bar / litres bear the CE mark.

### Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure		
Fluid Group	State	Temperature	011	012	013
Non Dangerous	Liquid / Gas	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid / Gas	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	CAT I	CAT I
Volume (litres)			3.2	5.1	7.0

## Physical Characteristics

Bowl Height	Dimensions (mm)			Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
10" (250 mm)	150	441	297	1.5	1.2	3.8
20" (500 mm)	150	691	550	2.5	1.2	4.9
30" (750 mm)	150	936	814	3.5	1.2	6.0

*Dimensions are based on illustration shown (HILCE011BB-B-E). For accurate dimensions, please contact Parker domnick hunter.*

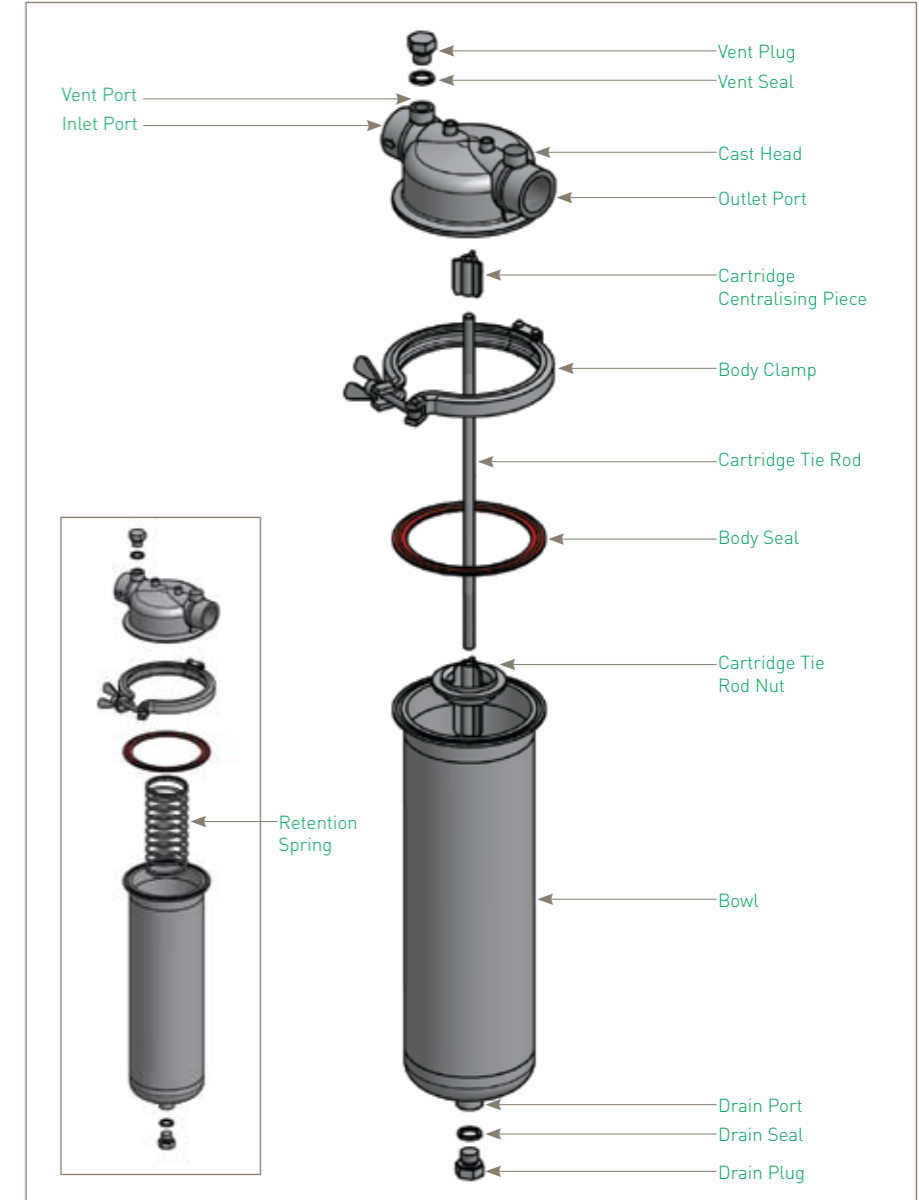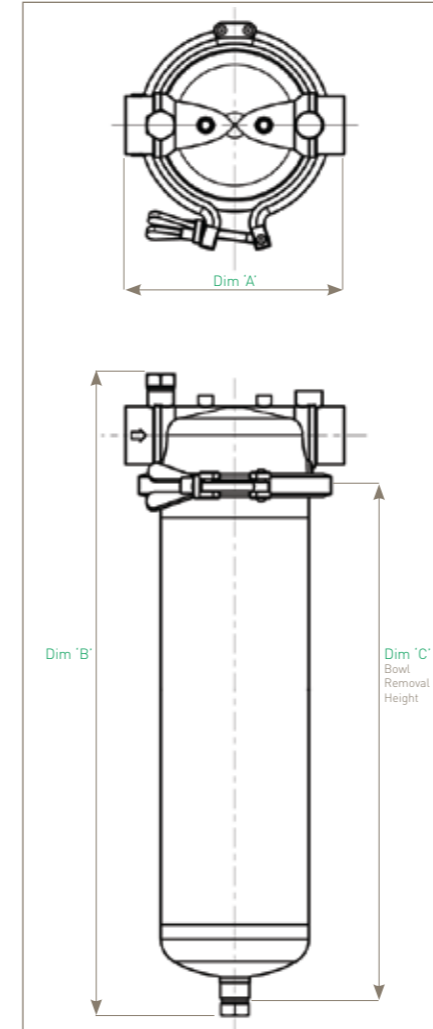

## Ordering Information

HIL  01   -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
CE Standard	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm)	B 1" (25.4 mm)	B BSPP N NPT	B DOE D 222	E EPDM

*Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.*

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HIL@ datasheet for more information.

# HIL<sup>+</sup> Filter Housing

- industrial liquid



- Industrial single element liquid housing
- Available in 3 different housing classes: ATEX, CE and High Pressure
- Industrial and industrial-electropolished surface finishes available
- Suitable for cartridge types DOE or 222
- Fabricated 'C' style version available (Not Cast Head)

## Specification

### Materials of Construction

- Housing: 316L Stainless Steel (Cast Head)
- Seals: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA

### Surface Finish

#### Two Finished Available:

- Industrial Finish  
Head-Cast, Pickled & Passivated  
Bowl Internal: As Welded  
Bowl External: Pickled & Passivated
- Industrial Electropolished Finish  
Head-Cast, Pickled & Passivated  
Bowl Internal: Electropolished  
Bowl External: Polished 0.8 µm Ra

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

### Design Basis

ASME VIII Division 1.  
ATEX 94/9/EC (where applicable)

ATEX Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	011	012	013	014
Non Dangerous	Gas / Vapour	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	135 °C (275 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
Non Dangerous	Liquid	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	135 °C (275 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	CAT I	CAT I	CAT I
Volume (litres)			3.2	5.1	7.0	8.9



CE Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	011	012	013	014
Non Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Gas / Vapour	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
Non Dangerous	Liquid	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	150 °C (302 °F)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)	5.00 barg (72.51 psig)
PED Conformity Assessment Category			SEP	CAT I	CAT I	CAT I
Volume (litres)			3.2	5.1	7.0	8.9

High Pressure Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	011	012	013	014
Non Dangerous	Gas / Vapour	205 °C (401 °F)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
Non Dangerous	Liquid	205 °C (401 °F)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
PED Conformity Assessment Category			CAT I	CAT I	CAT I	CAT I
Volume (litres)			3.2	5.1	7.0	8.9

## Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)		
	'A'	'B'	'C'	Bowl	Head	Total
10" (250 mm)	230	441	297	1.5	5.4	7.8
20" (500 mm)	230	691	550	2.5	5.4	8.9
30" (750 mm)	230	936	814	3.5	5.4	10.0
40" (1000 mm)	230	1186	1058	4.5	5.4	11.1

Dimensions shown are for a vessel with 1" BS4504 DIN 2633 ports, 1/2" BSPP vent and drain. For other formats, please contact Parker domnick hunter.

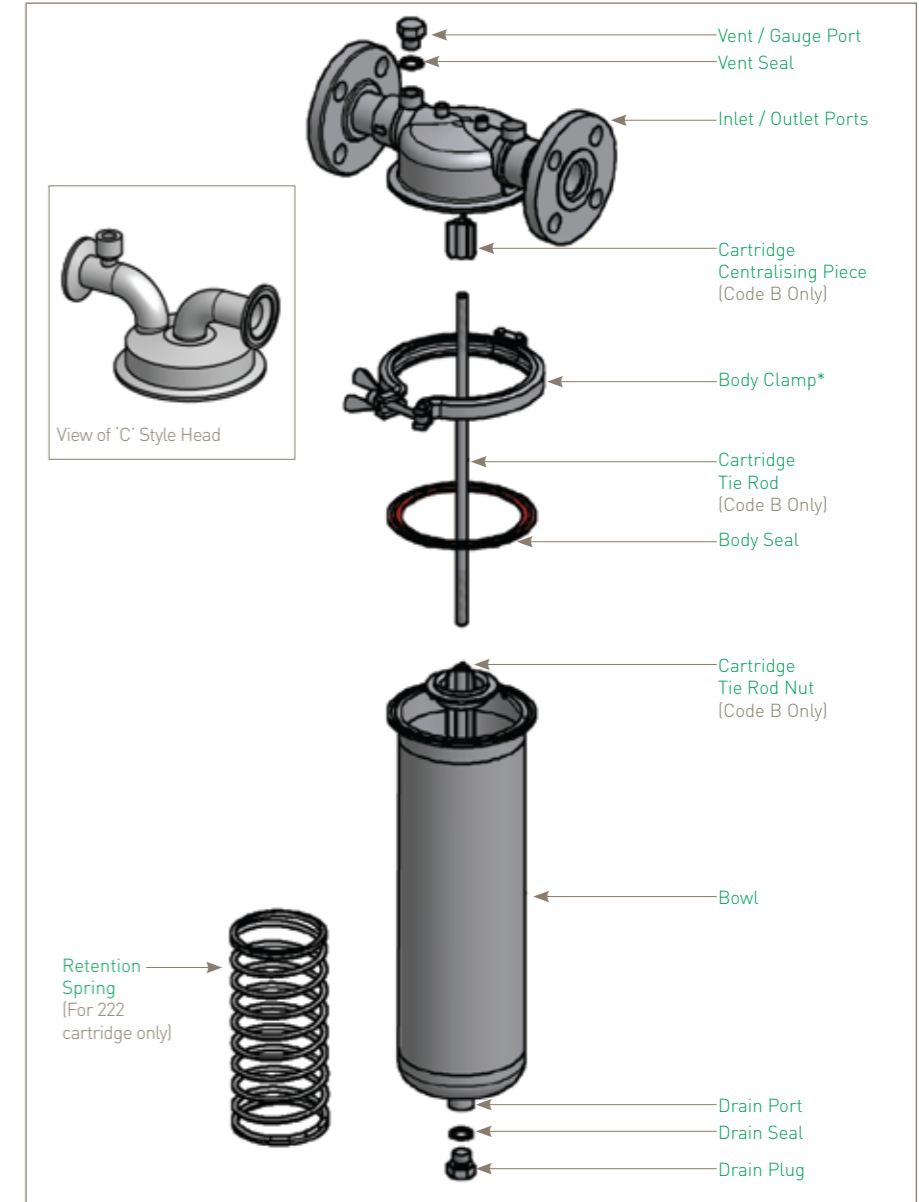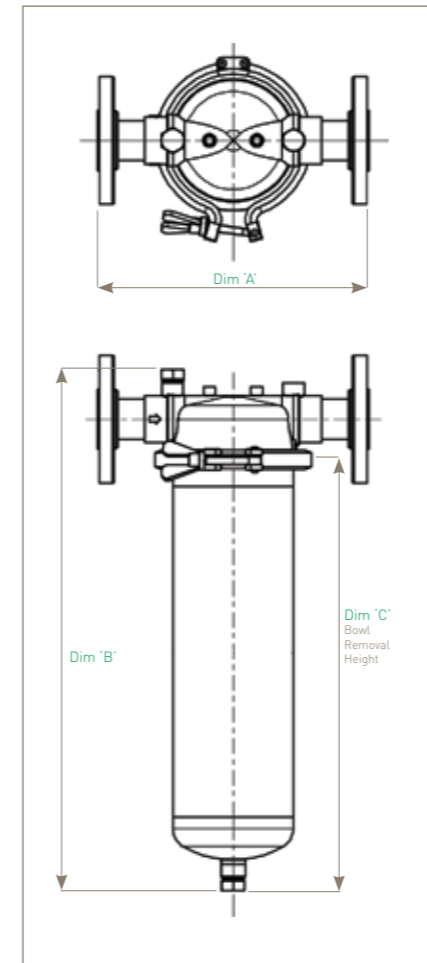

\*Double bolted clamp required for HP and PTFE seal options

## Ordering Information

**HIL**  **01**      -   -   -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Vent	Code   Drain
AT ATEX CE Standard HP* High Pressure	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm) 4 40" (1000 mm)	B 1" (25.4 mm) Y 1 1/2" (38.1 mm)	B* BSPP (F) F ANSI RF150 <sup>(1)</sup> H ANSI RF 300 L BS4504 DIN2633 N* NPT (F) T* Tri-clamp	B DOE C 226 (Fabricated Head) D 222	E EPDM P* PTFE S Silicone V Viton	B 1/2" BSPP N 1/2" NPT X° No Vent	B 1/2" BSPP N 1/2" NPT
				* Only available with 'C' Style cartridge configuration		* Double bolted clamp required	
Code   Surface Finish	Internal	External	Code   Tagged				
E Industrial Electropolished I Industrial	Electropolished As Welded	0.8 µm 0.8 µm	T Yes X No				

(1) Only available in 1" connection Vessels. HP Vessels to use ANSI RF-300. \* Only available with 'C' Style cartridge configuration.

For Tagged Options customer identification numbers required at time of ordering.

## ZVP Housings

- industrial plastic

- Single cartridge polypropylene / nylon housing
- Accepts DOE filters with knife edge sealing
- Accepts plug-in cartridges with positive o-ring seals
- Meets water conditioning foundation standards for hydraulic leak test and ultimate burst pressure
- Cost-effective filtration of liquids for pharmaceutical, chemical and beverage applications




### Available Options

Type	Material	Design Pressure (barg)	Design Temperature
ZVP-1	Reinforced Polypropylene	8.6	51.7 °C (125 °F)
ZVP-2	Reinforced Polypropylene	8.6	51.7 °C (125 °F)
ZVP-3	Polycarbonate / Reinforced Polypropylene	8.6	51.7 °C (125 °F)
ZVP-4	Nylon	8.5	71.1 °C (160 °F)
ZVP-5	Reinforced Polypropylene	8.6	51.7 °F (125 °F)
ZVP-7	Reinforced Polypropylene	8.6	51.7 °C (125 °F)
ZVP-10	Reinforced Polypropylene	8.6	51.7 °C (125 °F)
ZVP-11	Pure Polypropylene	8.9	38.0 °C (100.4 °F)

Type	Crossport (A) (mm)	Overall Height (B) (mm)	Approx Weight (kg)	Approx Volume (L)	Connection Size / Type	Vent Button
ZVP-1	112.7	180	0.6	0.7	1/8" BSPP	Yes
ZVP-2	130.0	311	1.5	1.6	1/4" BSPP	Yes
ZVP-3	130.0	321	1.2	1.6	1/4" BSPP	Yes
ZVP-4	130.0	305	1.8	1.6	1/4" BSPP	No
ZVP-5	130.0	569	1.9	2.6	3/4" BSPP	Yes
ZVP-7	130.0	311	1.5	1.6	1/4" BSPP	Yes
ZVP-10	130.0	569	1.9	2.6	3/4" BSPP	Yes
ZVP-11	130.0	316	1.4	1.6	1/4" BSPP	No*

\* 1/4" BSPP vent and drain sockets with o-rings and plugs

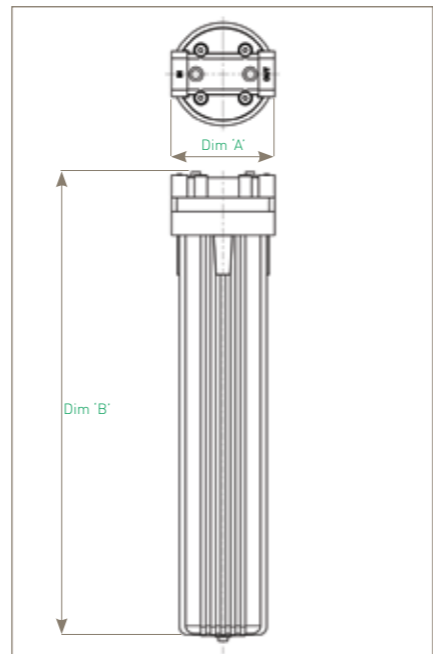

## Heating Jackets

The design of heating systems for vent filters working in high humidity environments is often treated as an afterthought, but the correct operation of these filters can be critical to many processes. Applications such as the venting of Water For Injection (WFI) holding tanks rely on a well designed heated housing to prevent condensation build up, filter blockage and the risk of microbial growth. It is also one of the key design requirements highlighted in current FDA recommendations. Heating may also be required during hot water sanitisation and CIP to prevent excess differential pressure being generated from high levels of bulk condensate.

- Heating system for vent applications
- Waterproof protection to IP65
- Fully insulated 'cool touch' outer surface
- Accurate temperature control using PT100RT6



### Specification - Heating Jacket

#### Materials of Construction

- Jacket Material
  - Silicone: Silicone Rubber
  - Glass Silk: PTFE Coated Glass Silk
- Insulation Material
  - Silicone: Silicone Foam
  - Glass Silk: PTFE Coated Glass Silk

**Maximum Withstand Temperature De-Energised**  
200 °C (392 °F)

**Temperature Sensor**  
PT100

**Thermal Cut-Out Temperature Setting**  
150 °C ± 5 °C (302 °F ± 41 °F)

**Test Voltage**  
1500 V

**Insulation Value**  
Greater than 100 mΩ

#### Protection Rating

Silicone: IP65  
Glass Silk: Not Applicable  
Inter-Connection Plugs: IP67

#### Design Standards

EN 60519-1 and EN 60519-2

**Operating Voltage**  
110 V or 230 V

**Power Output**

5" (125 mm):	63 W
10" (250 mm):	279 W
20" (500 mm):	558 W
30" (750 mm):	837 W

### Specification - Temperature Control Unit

**Materials of Construction**

- Material: Polycarbonate

**Operating Voltage**  
110 V or 230 V

**Maximum Withstand Temperature of Controller**  
55 °C (131 °F)

**Maximum Continuous Current Out**  
7 A

**Over Current Protection @ 230 °C Ambient**  
4 seconds @ 12 A, 1 second @ 24 A

**Set Temperature Display**  
8 mm Red LED Display

**Actual Temperature Display**  
10 mm Green LED Display

**PID (Proportional Integral Derivative) Control**  
Via autotune parameters (set by user)

**Protection Rating**  
IP65

**Design Standards**  
EN 61010-1

#### Alarm Contacts (Normally Open) When Applicable


Switching Capacity Max.

250 VAC	0.5 A	(load resistance)
125 VAC	1 A	(load resistance)
60 VAC	1 A	(load resistance)



# Small Scale Single Housings

Demi 2.5" & 5" small scale filter housings

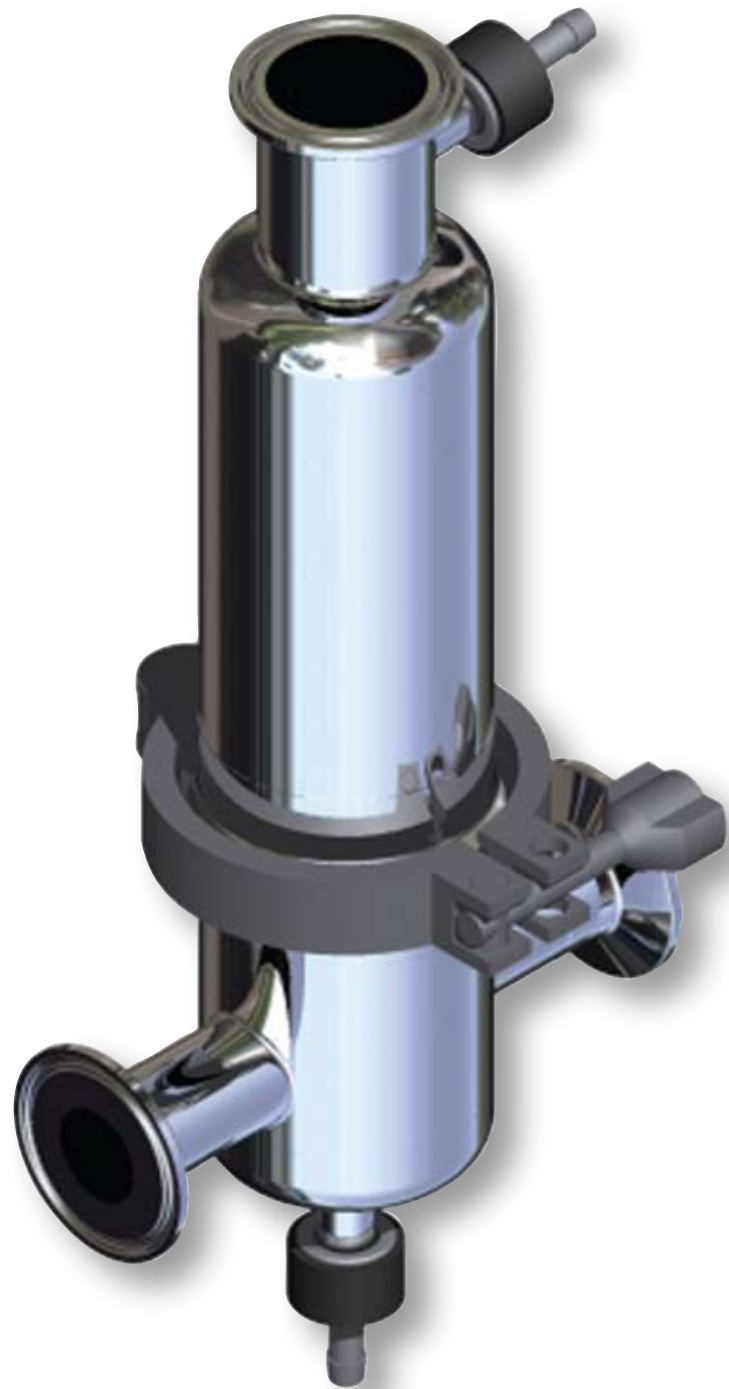

## **HSA - Sanitary air / gas housing**

Pharmaceutical & beverage grade finishes

## **HBA - Industrial air / gas housing**

Specifically designed for the food & beverage industry

## **HSV - Vent housing**

Pharmaceutical & beverage grade finishes

## **HSL - Sanitary liquid housing**

Pharmaceutical & beverage grade finishes

## **HSI - In-line sanitary liquid housing**

Pharmaceutical & beverage grade finishes

## **HIF - Industrial air / liquid housing**

Industrial grade finish as standard



## Demi HSA Filter Housing

- sanitary air / gas

- Flow efficient sanitary range of air / gas housings
- Designed specifically for the food and beverage industry
- Sanitary tri-clamp, vent and drain connections as standard
- Sanitary tri-clamp body closure as standard



### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

#### Surface Finish

- Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- All finishes pickled & passivated.

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

#### Certification

Supplied as standard with vessel inspection certificate.

#### Material Test Certification

EN10204 3.1 supplied upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK Statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour	150 °C [302 °F]	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

### Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)
	A	B	C	
A Size 5" (125 mm)	152	227	130	1.3
B Size 2 1/2" (65 mm)	152	172	70	1.2

Dimensions are based on illustration shown (HSACE01ABT-T-S). For accurate dimensions, please contact Parker domnick hunter.

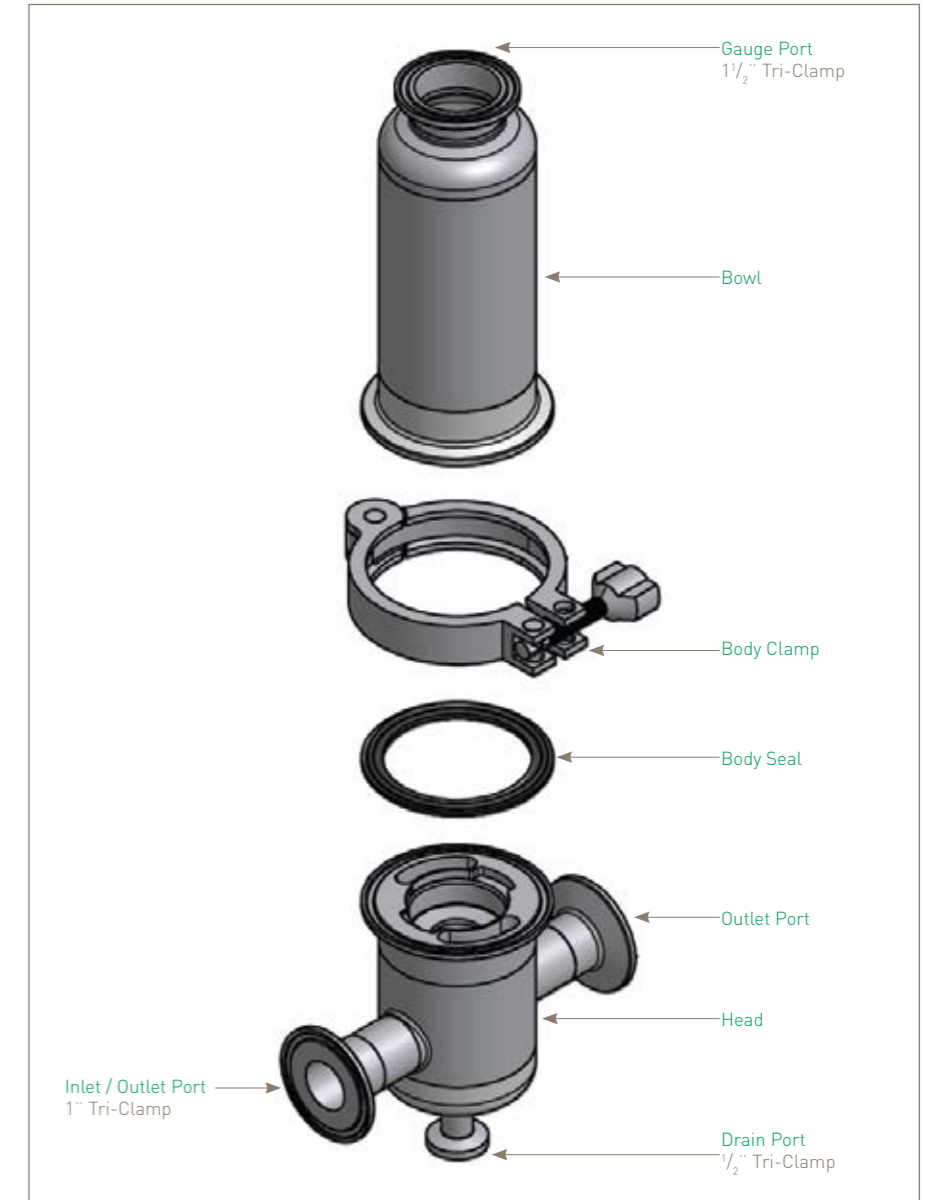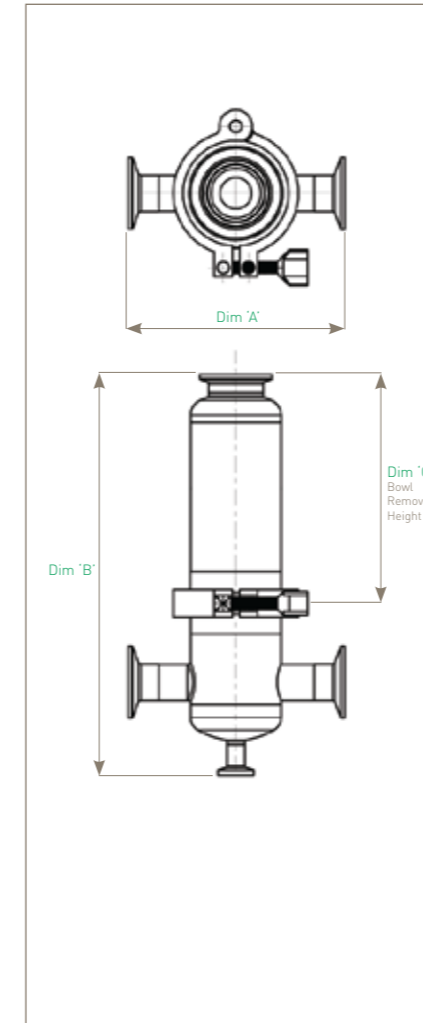

### Ordering Information

HSA  01   -  -

Code	Vessel Class	Code	Length (Nominal)	Code	Connection Size	Code	Standard	Code	Cartridge	Code	Seal
CE	Standard	A	5" (125 mm)	B	1"	T	Tri-Clamp	T	126	S	Silicone
		B	2 1/2" (65 mm)								

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSA® datasheet for more information.



## Demi HSA<sup>+</sup> Filter Housing

- sanitary air / gas



- Sanitary range of air / gas housing
- Available in 4 different housing classes: Atex, CE, High Pressure and Oxygen Service
- Both beverage and pharmaceutical surface finishes available
- A choice of easy to use sanitary vent and drain options

### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA

#### Surface Finish Options

- Beverage Finish
  - Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- Pharmaceutical Finish
  - Internal: Polished 0.4 µm Ra and Electropolished
  - External: Polished 0.25 µm Ra

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK Statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis

ASME VIII Division 1. ATEX 94/9/EC [where applicable]

ATEX Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

CE Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.5



High Pressure Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous	Gas / Vapour	205 °C (401 °F)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.5

Oxygen Service Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.5

### Physical Characteristics

Bowl Height	Dimensions (mm)	A		B		Typical Weight (Kg)
		A	B	C		
A Size 5" (125 mm)	152 340 130				1.3	
B Size 2 1/2" (65 mm)	152 285 70				1.2	

Dimensions are based on illustration shown (HSACE01ABTTE-HH-P-XI). For accurate dimensions, please contact Parker domnick hunter.

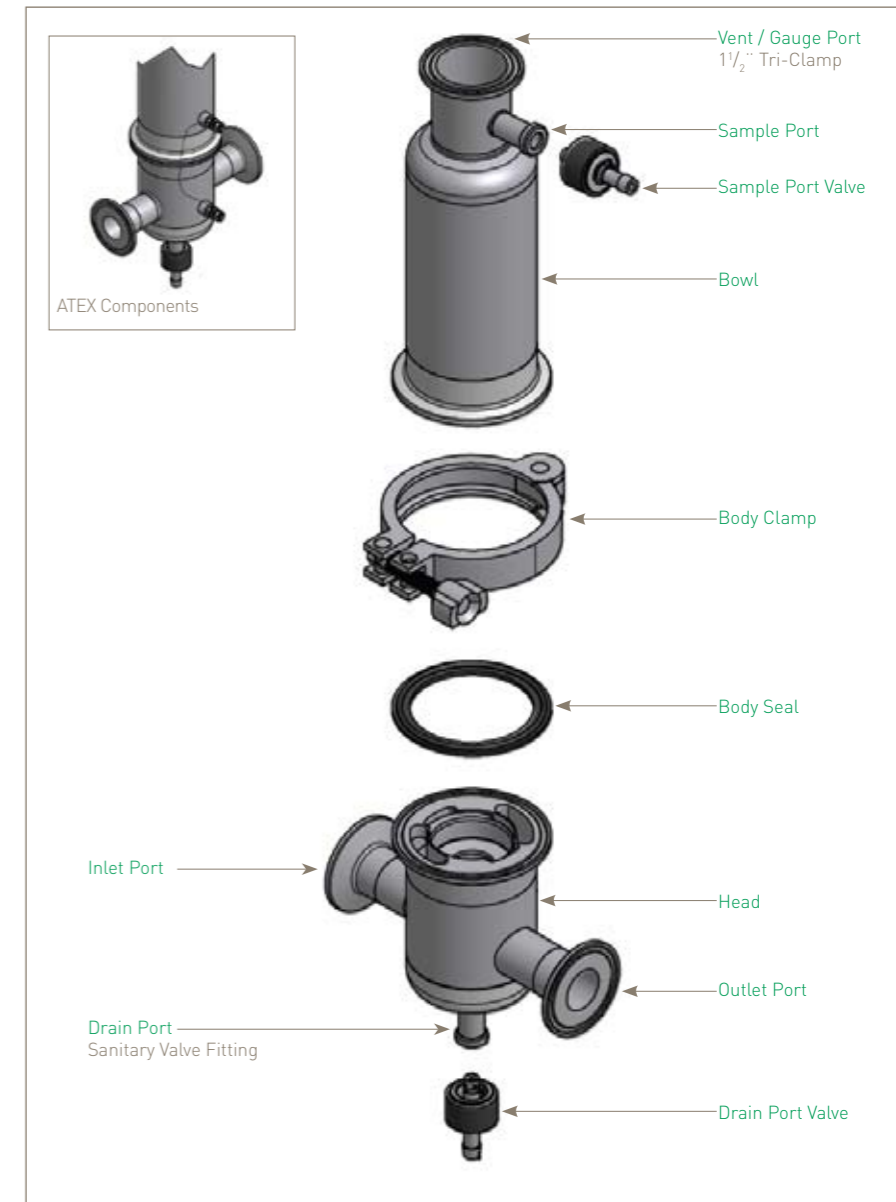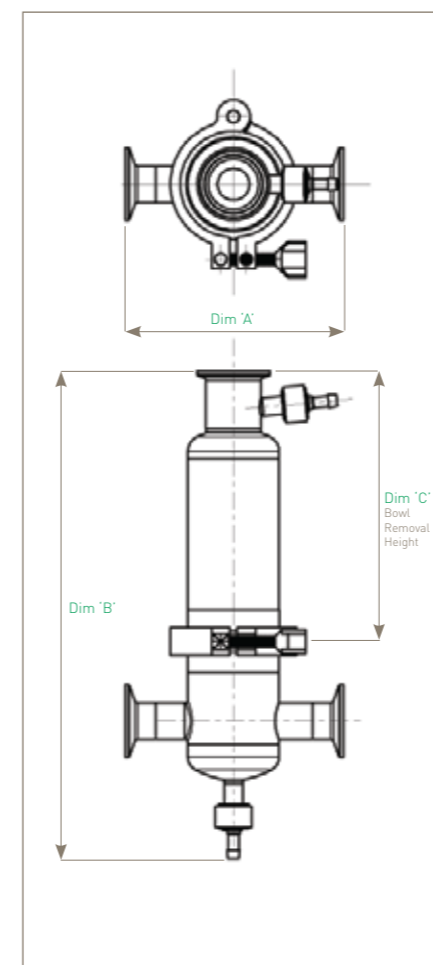

### Ordering Information

HSA	01									
Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Vent	Code   Drain			
AT ATEX CE Standard HP High Pressure OX Oxygen Service	A 5" (125 mm) B 2 1/2" (65 mm)	B 1" T 3/4" A 1/2"	T Tri-Clamp	T 126	E EPDM P* PTFE S Silicone V Viton	C Rectus 21 Vertical H 1 1/2" TCF & Hosebarb I 1 1/2" TCF & Staubli RBE03 M 1 1/2" TCF & 1/2" TCF R 1 1/2" TCF & Rectus 21 S Staubli RBE03 Vertical T 1 1/2" TCF Only	H Hosebarb R Rectus 21 S Staubli RBE03 T 1/2" TCF			
Code   Surface Finish		Internal	External							
B Beverage	0.4 µm	0.25 µm								
P Pharmaceutical	0.4 µm EP	0.25 µm								
Code   Tagged		T Yes	X No							

\* Double bolted clamp required

For Tagged Options customer identification numbers required at time of ordering

## Demi HBA Filter Housing

- industrial and beverage air / gas

- Flow efficient range of air / gas housings
- Designed to maximise flow and minimise pressure drop
- Designed specifically for the food and beverage industry



### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Body Seal: Silicone FDA
- Vent / Drain Seal: PTFE FDA

#### Surface Finish

- Internal: Unpolished 1 µm Ra Typical
  - External: Polished 0.8 µm Ra
- All finishes pickled & passivated.

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

#### Certification

Supplied as standard with vessel inspection certificate.

#### Material Test Certification

EN10204 3.1 supplied upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK Statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis

ASME VIII Division 1.



Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour	150 °C [302 °F]	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume [litres]			0.75	0.50

## Demi HBA Filter Housings

### Physical Characteristics

Bowl Height	Dimensions (mm)	Dimensions (mm)		Typical Weight [Kg]
		'A'	'B'	
A Size 5" [125 mm]	175 300 130			1.5
B Size 2 1/2" [65 mm]	175 245 70			1.4

Dimensions are based on illustration shown [HBACE01ABB-TS]. For accurate dimensions, please contact Parker domnick hunter.

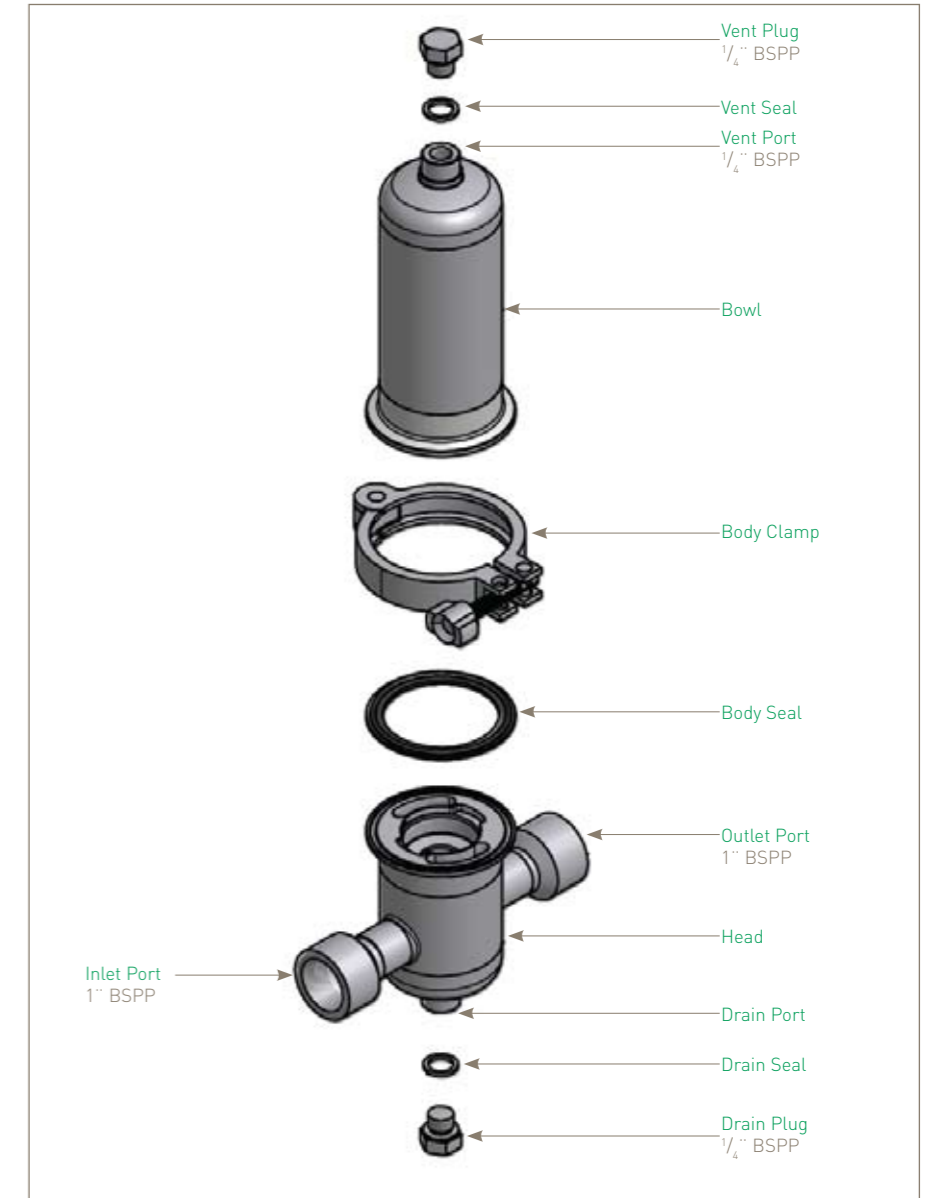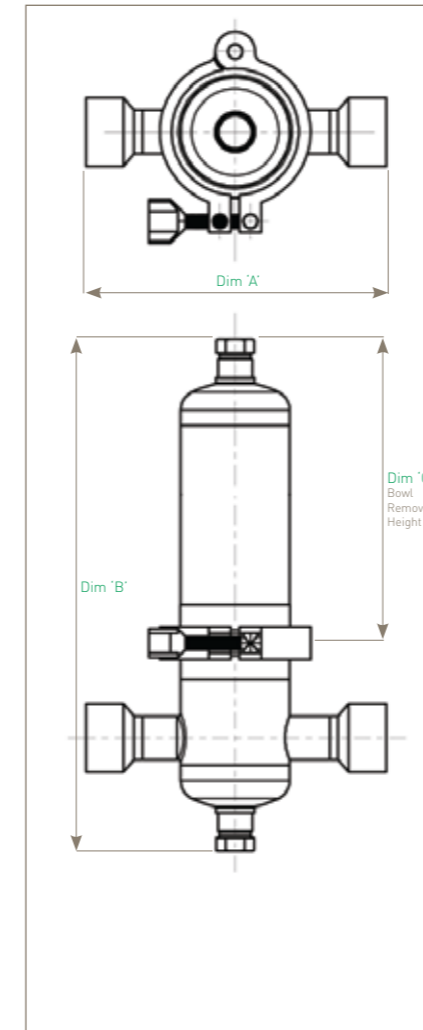

### Ordering Information

HBA  01   -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
CE Standard	A 5" [125 mm] B 2 1/2" [65 mm]	B 1"	B BSPP N NPT	T 126	S Silicone

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HBA® datasheet for more information.

## Demi HBA<sup>+</sup> Filter Housing

- industrial and beverage air / gas

- Flow efficient range of air / gas housings
- Available in 4 different housing classes: Atex, CE, High Pressure and Oxygen Service
- Beverage, pharmaceutical and industrial surface finishes available
- A number of inlet / outlet port connections
- Wide range of vent and drain options



### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Body Seal: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA
- Vent / Drain Seal: PTFE FDA

#### Surface Finish Options

- Industrial Finish
  - Internal: As Welded, Pickled & Passivated
  - External: Polished 0.8 µm Ra
- Beverage Finish
  - Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- Pharmaceutical Finish
  - Internal: Polished 0.4 µm Ra and Electropolished
  - External: Polished 0.25 µm Ra

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK Statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis

ASME VIII Division 1. ATEX 94/9/EC (where applicable)

ATEX Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

CE Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

High Pressure Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous	Gas / Vapour	205 °C (401 °F)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50



Oxygen Service Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Dangerous	Gas / Vapour	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

## Demi HBA<sup>+</sup> Filter Housings

### Physical Characteristics

Bowl Height	Dimensions (mm)	A		Typical Weight (Kg)
		B	C	
A Size 5" (125 mm)	220 300 130			1.5
B Size 2 1/2" (65 mm)	220 245 70			1.4

Dimensions are based on illustration shown (HBACE01ABFTE-BB-P-XI). For accurate dimensions, please contact Parker domnick hunter.

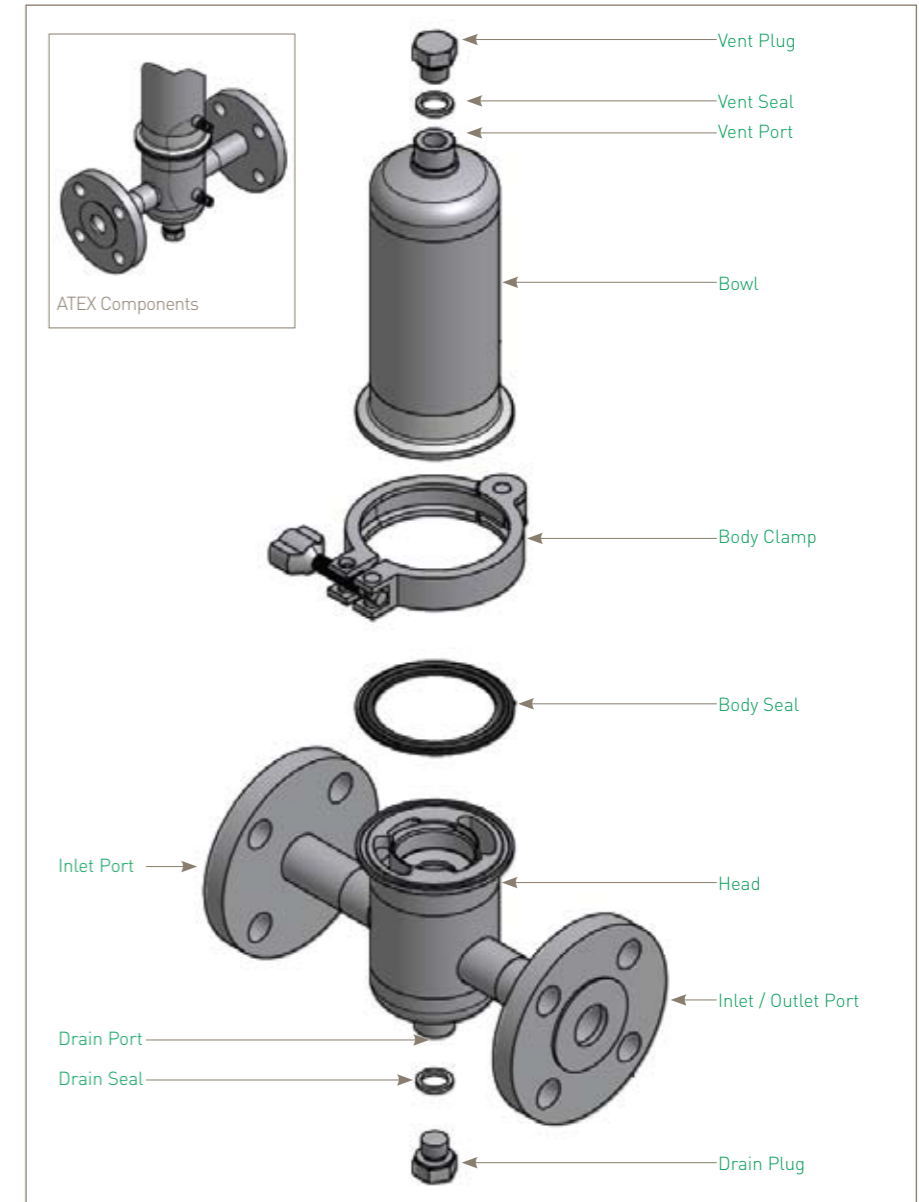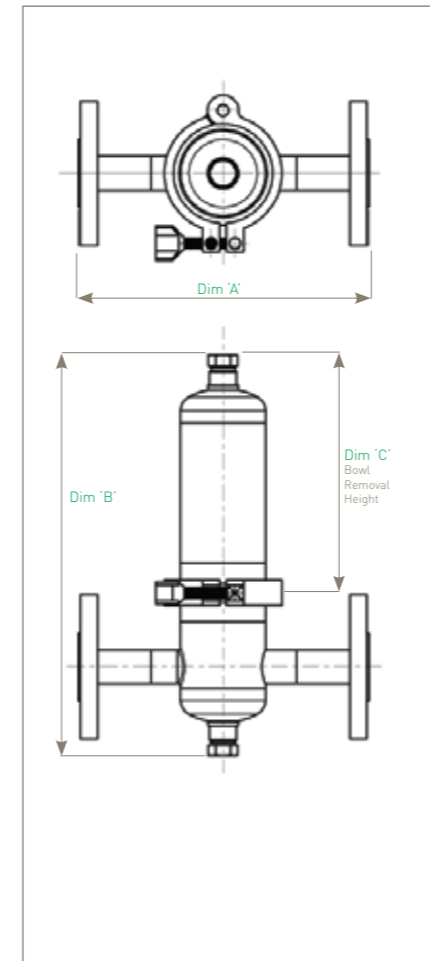

### Ordering Information

**HBA**  **01**      -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Vent	Code   Drain
AT ATEX	A 5" (125 mm)	B 1"	B BSPP (F)	T 126	E EPDM	B 1/4" BSPP (F)	B 1/4" BSPP
CE Standard	B 2 1/2" (65 mm)	T 3/4"	D <sup>(1)</sup> DIN 11851		P* PTFE	C Rectus 21 Vertical	N 1/4" NPT
HP High Pressure		A 1/2"	F <sup>(2)(4)</sup> ANSI RF 150		S Silicone	H <sup>(1)</sup> 1 1/2" TCF & Hosebarb	H Hosebarb
OX Oxygen Service		X 3/4"	H <sup>(3)</sup> ANSI RF 300		V Viton	M <sup>(1)</sup> 1 1/2" TCF & Staubli RBE03	R Rectus 21
		Q 1/4"	L <sup>(3)</sup> BS4504			N 1 1/2" TCF & 1/2" TCF	S Staubli RBE03
			M* DIN2633			N 1/2" NPT (F)	T 1/2" TCF
			SMS Pipe (3008)			R <sup>(1)</sup> 1 1/2" TCF & Rectus 21	
			N NPT (F)			S Staubli RBE03 Vertical	
			T <sup>(3)</sup> Tri-Clamp			T 1 1/2" TCF Only	
			W ISO / BS Pipe				

\* Double bolted clamp required

Code   Surface Finish	Internal	External
B Beverage	0.4 µm	0.25 µm
I Industrial	As Welded	0.8 µm
P Pharmaceutical	0.4 µm EP	0.25 µm

Code   Tagged	Yes	No
T	Yes	No
X	No	Yes

For Tagged Options customer identification numbers required at time of ordering



# Demi HSV Filter Housing

- vent housing

- Direct connection to tank boss allows housing to be self-supportive
- Corrosion resistant 316L stainless steel
- Easy assembly and maintenance



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

### Surface Finish

- Internal: Polished 0.8 µm Ra
- External: As welded  
*All finishes pickled & passivated.*

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. *Weld finish & detail drawings available upon request.*

### Certification

Supplied as standard with vessel inspection certificate.

### Material Test Certification

EN10204 3.1 supplied upon request.

Working Condition PED 97/23/EC		Volume [litres]	
State	Temperature	01A	01B
Gas / Vapour	150 °C [302 °F]	0.75	0.50

### Recommended Operation Guidelines Sizing

Sizing vent vessels particularly for vacuum sensitive tanks can require specialist advice. It is important that VENT housings are sized on maximum gas flow capacity under actual operation conditions.

### Vacuum Protection



Where a tank is vacuum sensitive, there is a risk of tank collapse. In such cases the fitting of an appropriately rated bursting disc (or similar) and, if necessary a pressure relief valve, is highly recommended.

# Demi HSV Filter Housings

## Physical Characteristics

Bowl Height	Dimensions (mm)	Typical Weight (Kg)	
	'B'	'C'	
A Size 5" [125 mm]	195	130	1.0
B Size 2 1/2" [65 mm]	140	70	0.9

*Dimensions are based on illustration shown [HSV01ABT-T-S]. For accurate dimensions, please contact Parker domnick hunter.*

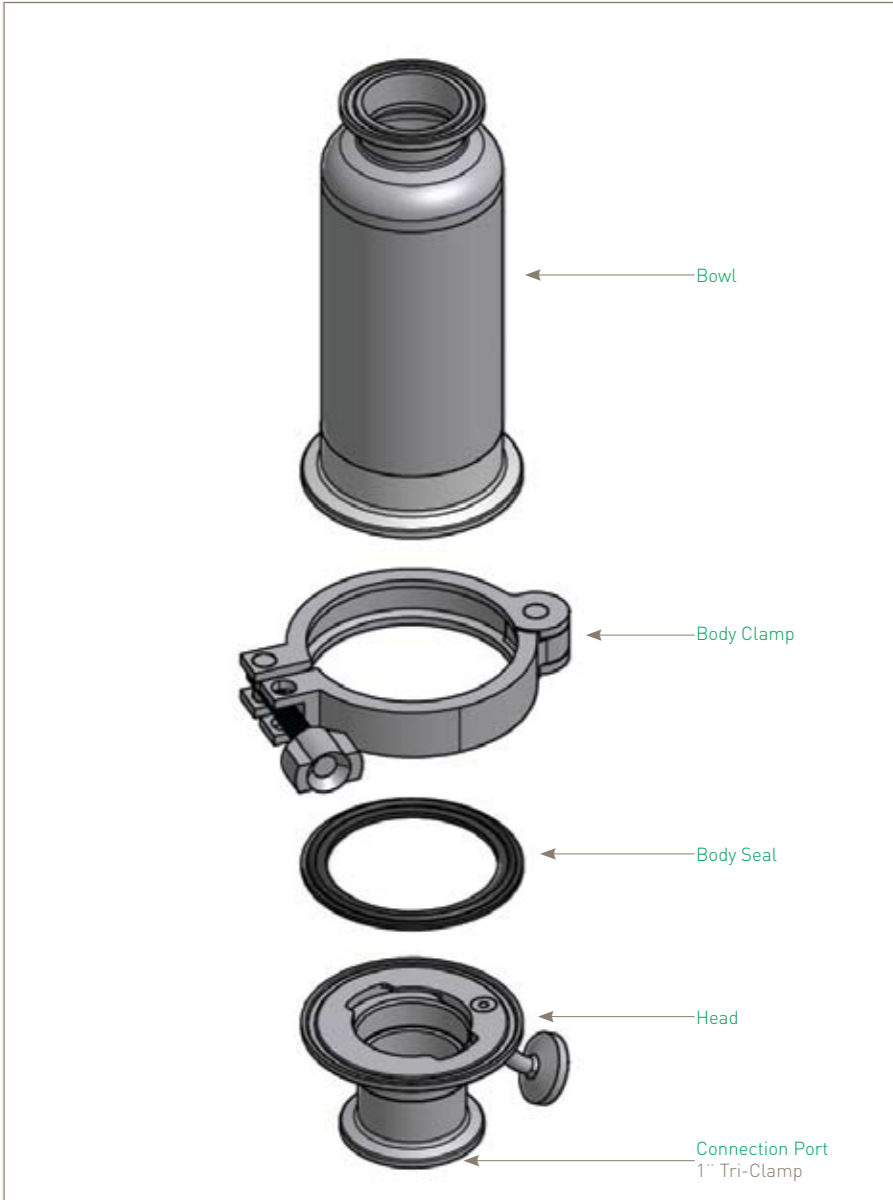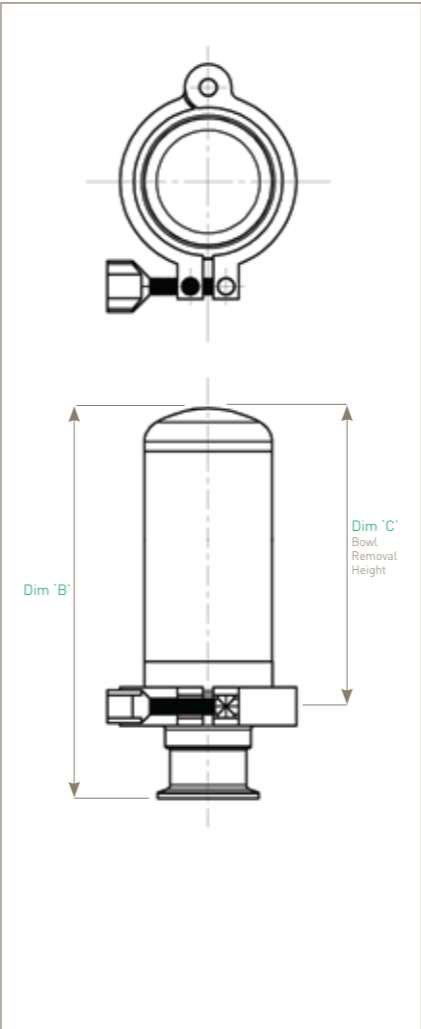

## Ordering Information

HSV  01   -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
DH Vent Housing	A 5" [125 mm] B 2 1/2" [65 mm]	B 1"	T Tri-Clamp	T 126	S Silicone

*Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.*

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSV® datasheet for more information.

# Demi HSV<sup>+</sup> Filter Housing

- vent housing



- Available in ATEX version
- Beverage, pharmaceutical and industrial surface finishes available
- Available in various connection types

## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA

Note: Seal used only to position bowl clamp arrangement.

Working Condition PED 97/23/EC			Volume [litres]	
Variant	State	Temperature	01A	01B
Standard	Gas / Vapour	150 °C [302 °F]	0.75	0.5
ATEX	Gas / Vapour	135 °C [275 °F]	0.75	0.5

### Surface Finish Options

- Industrial Finish
  - Internal: As Welded, Pickled & Passivated
  - External: Polished 0.8 µm Ra
- Beverage Finish
  - Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- Pharmaceutical Finish
  - Internal: Polished 0.4 µm Ra and Electropolished
  - External: Polished 0.25 µm Ra

### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.



### Design Basis

ATEX 94/9/EC (where applicable)

## Physical Characteristics

Bowl Height	Dimensions (mm)	Typical Weight [Kg]	
	'B'	'C'	
A Size 5" [125 mm]	203	130	1.7
B Size 2 1/2" [65 mm]	148	70	1.6

Dimensions are based on illustration shown (HSV01ABFTE-P-X). For accurate dimensions, please contact Parker domnick hunter.

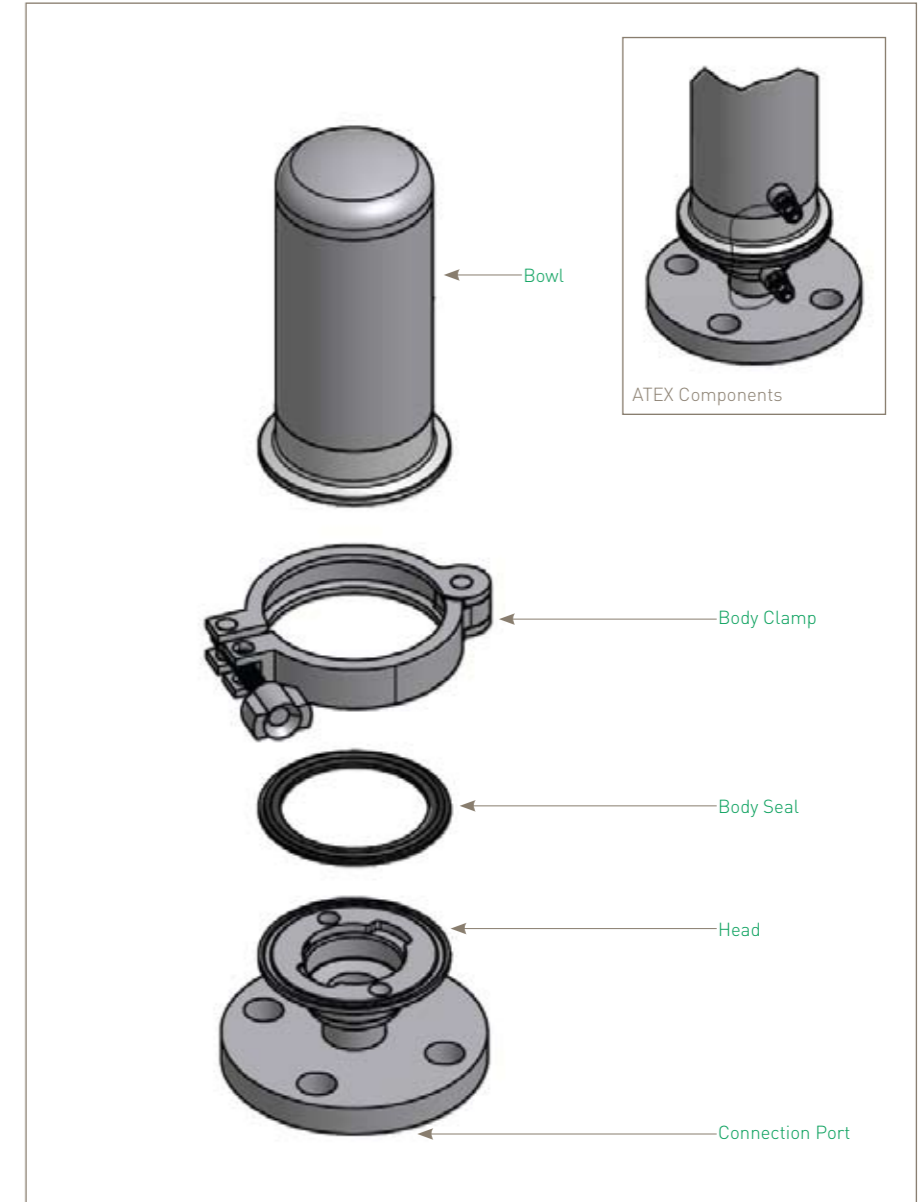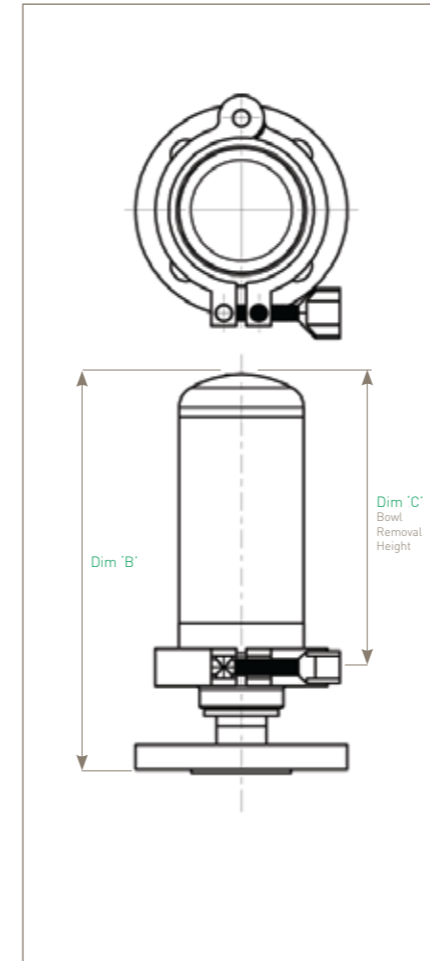

## Ordering Information

HSV	01								
Code   Vessel Class	Code   Length [Nominal]	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Surface Finish	Internal	External	Code   Tagged
DH Standard AT ATEX	A 5" [125 mm] B 2 1/2" [65 mm]	B 1"	B BSPP (F) D DIN11851 F ANSI RF150 L BS4504 N DIN2633 N NPT (F) T Tri-Clamp	T 126	E EPDM P PTFE S Silicone V Viton	B Beverage I Industrial P Pharmaceutical	0.4 µm As Welded 0.4 µm EP	0.25 µm 0.8 µm 0.25 µm	T Yes X No

For Tagged Options customer identification numbers required at time of ordering

## Demi HSL Filter Housing

- sanitary liquid

- Single element sanitary liquid housing
- Sanitary tri-clamp, vent and drain connections as standard
- Sanitary tri-clamp body closure as standard



### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

#### Surface Finish

- Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- All finishes pickled & passivated.

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

#### Certification

Supplied as standard with vessel inspection certificate.

#### Material Test Certification

EN10204 3.1 supplied upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK Statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis

ASME VIII Division 1.



Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour & Liquid	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

## Demi HSL Filter Housings

### Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)
	'A'	'B'	'C'	
A Size 5" (125 mm)	117	191	130	2.0
B Size 2 1/2" (65 mm)	117	136	70	1.8

Dimensions are based on illustration shown (HSLCE01ABT-T-S). For accurate dimensions, please contact Parker domnick hunter.

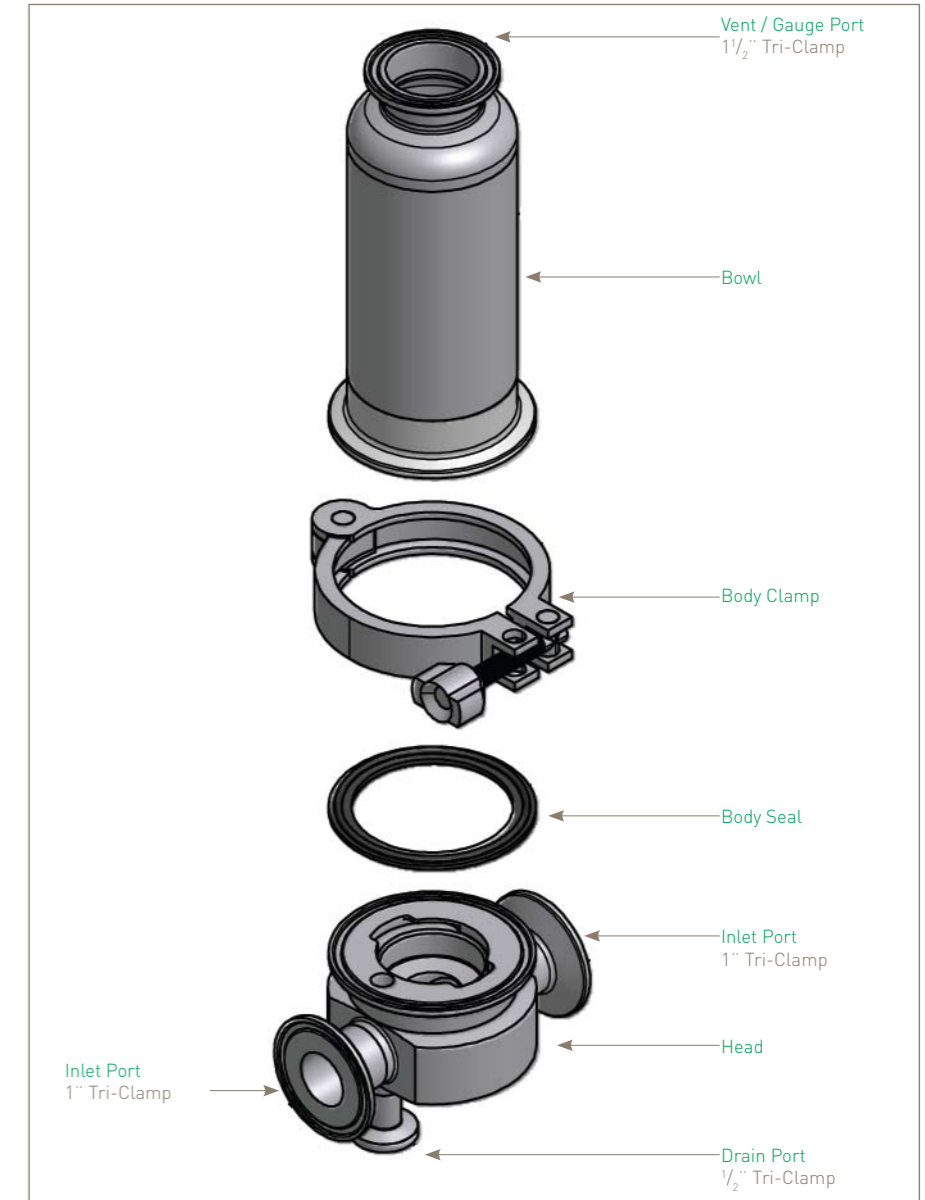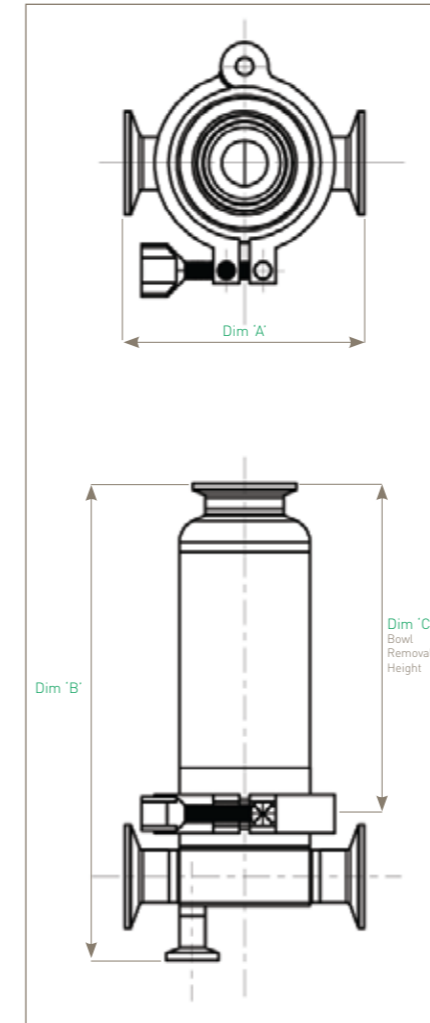

### Ordering Information

HSL  01   -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
CE Standard	A 5" (125 mm) B 2 1/2" (65 mm)	B 1"	T Tri-Clamp	T 216	S Silicone

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSL® datasheet for more information.



## Demi HSI Filter Housing

- in-line sanitary liquid



- In-line sanitary liquid housing
- High quality crevice free construction
- Sanitary body closure as standard

### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone FDA

#### Surface Finish

- Internal: Polished 0.4 µm Ra
  - External: Polished 0.25 µm Ra
- All finishes pickled & passivated.

#### Welding

All assembly welds are full penetration.  
All welds are crevice and undercut free.  
*Weld finish & detail drawings available upon request.*

#### Certification

Supplied as standard with vessel inspection certificate.

#### Material Test Certification

EN10204 3.1 supplied upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK Statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Liquid / Gas	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

### Physical Characteristics

Bowl Height	Dimensions (mm)		Typical Weight (Kg)
	'B'	'C'	
A Size 5" (125 mm)	207	130	1.0
B Size 2 1/2" (65 mm)	152	70	0.8

Dimensions are based on illustration shown (HSICED1AYT-T-S).  
For accurate dimensions, please contact Parker domnick hunter.

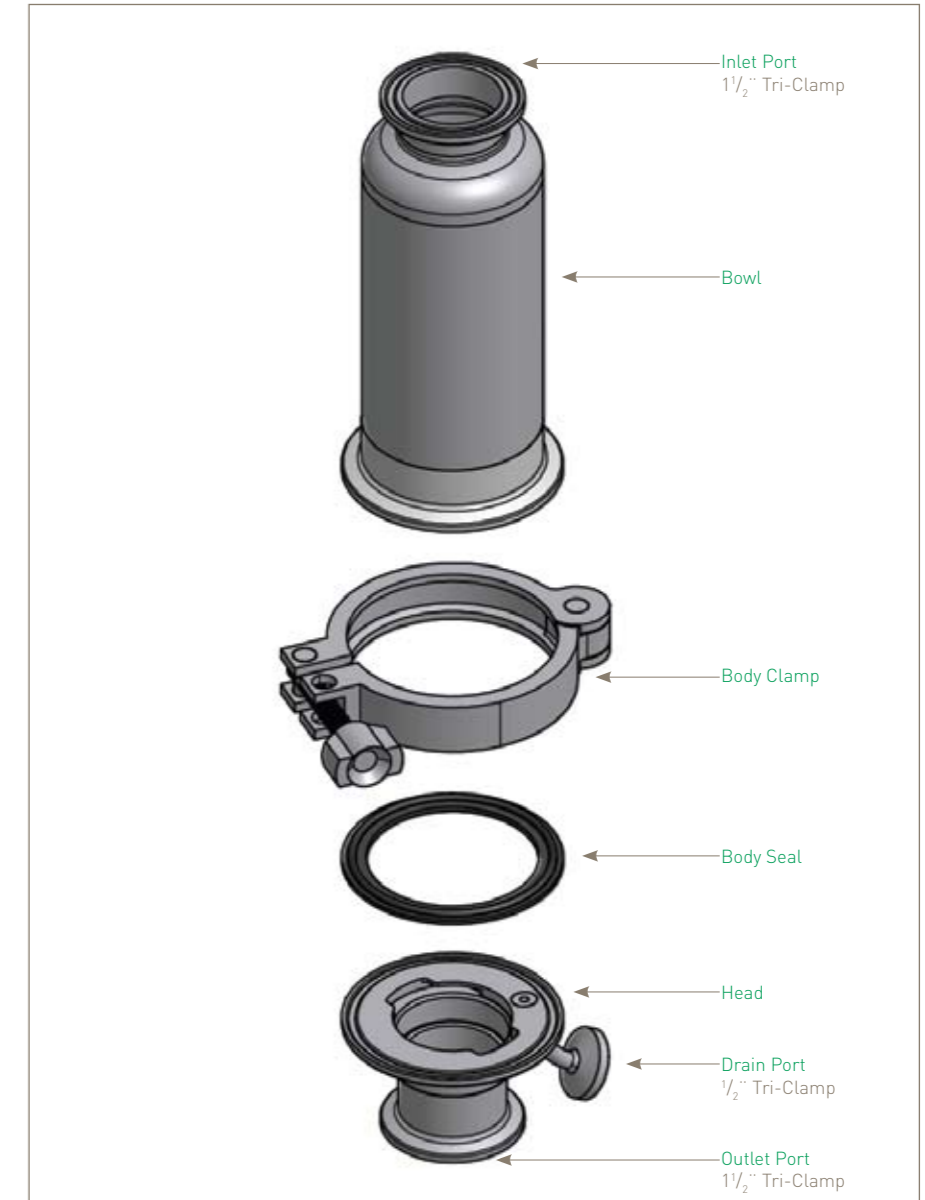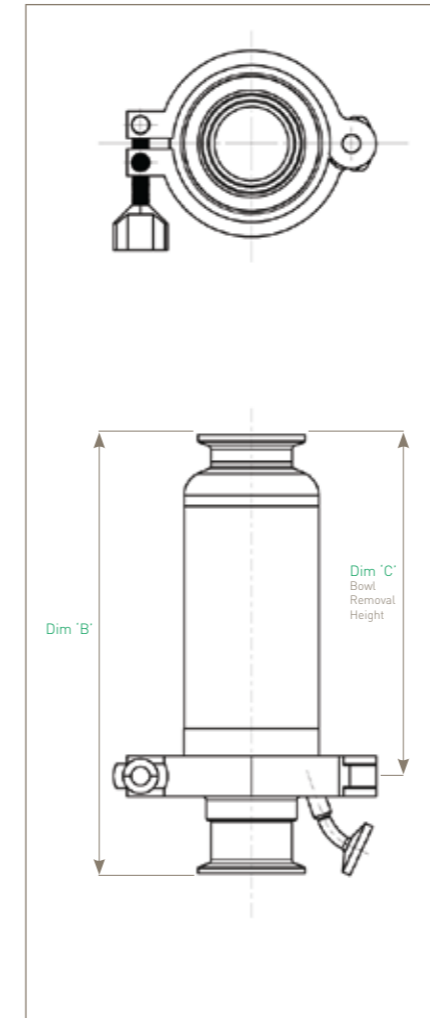

### Ordering Information

HSI  01   -  -

Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
CE Standard	A 5" (125 mm) B 2 1/2" (65 mm)	Y 1/2"	T Tri-Clamp	T 216	S Silicone

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HSI® datasheet for more information.



## Demi HIF Filter Housing

- industrial air / liquid

- Industrial single element air / liquid housing
- 1/2" BSPP or NPT inlet / outlet standard connections
- Suitable replacement for plastic housings
- Suitable for Parker domnick hunter 'Z' style 116 'O' rings



### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel (Cast Head)
- Body Seal: EPDM FDA
- Vent / Drain Seal: PTFE FDA

#### Surface Finish

- Internal: Unpolished 1 µm Typical
  - External: Polished 0.8 µm Ra
- All finishes pickled & passivated.*

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. *Weld finish & detail drawings available upon request.*

#### Certification

Supplied as standard with vessel inspection certificate.

#### Material Test Certification

EN10204 3.1 supplied upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK Statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis



ASME VIII Division 1.

Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Liquid / Gas	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

### Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)
	'A'	'B'	'C'	
A Size 5" (125 mm)	75	226	130	1.5
B Size 2 1/2" (65 mm)	75	171	70	1.4

*Dimensions are based on illustration shown (HIFCE01AAB-Z-E). For accurate dimensions, please contact Parker domnick hunter.*

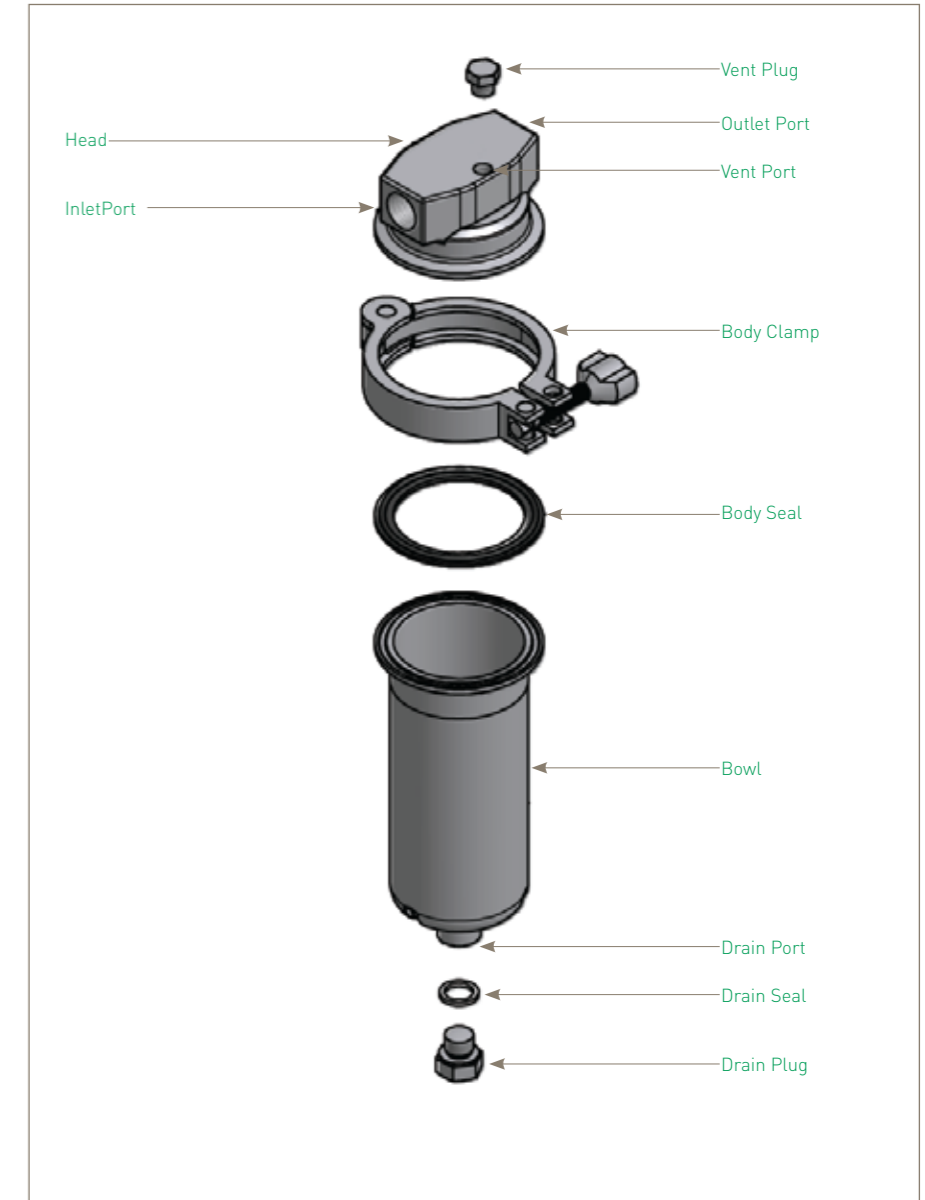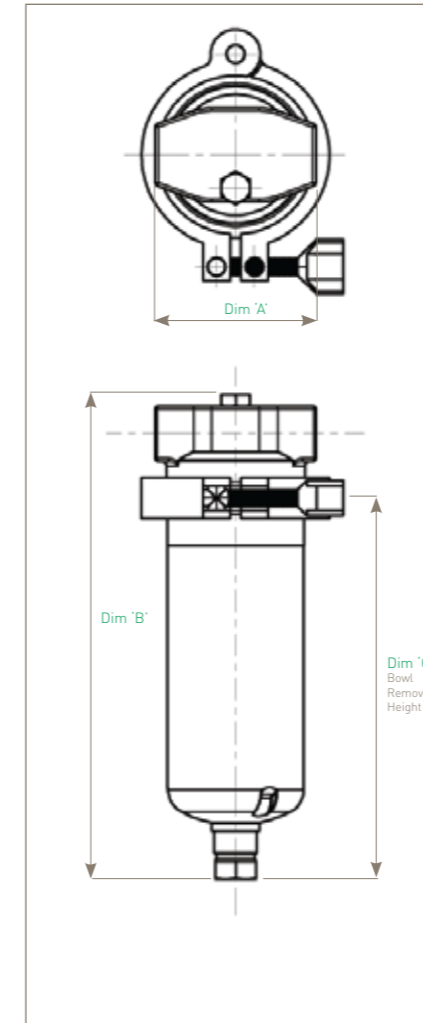

### Ordering Information

HIF	01				
Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal
CE Standard	A 5" (125 mm) B 2 1/2" (65 mm)	A 1/2"	B BSPP N NPT	Z 116	E EPDM

*Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.*

For additional features, Parker domnick hunter offer this housing as part of its Standard PLUS Range. Please see HIF® datasheet for more information.

## Demi HIF<sup>⊕</sup> Filter Housing

- industrial air / liquid



- Industrial single element air / liquid housing
- Available in 3 different housing classes: ATEX, CE and High Pressure
- Industrial and industrial-electropolished surface finishes available
- Suitable for Parker domnick hunter 'Z' style 116 'O' rings

### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel (Cast Head)
- Body Seal: EPDM FDA, PTFE FDA, Silicone FDA, Viton FDA
- Vent / Drain Seal: PTFE FDA

#### Surface Finish Options Two Finishes Available:

- Industrial Finish  
Head-Cast, Pickled & Passivated  
Bowl Internal: As Welded  
Pickled & Passivated  
Bowl External: Polished 0.8 µm Ra
- Industrial Electropolished Finish  
Head-Cast, Pickled, Passivated & Electropolished  
Bowl Internal: Electropolished  
Bowl External: Polished 0.8 µm Ra

#### Welding

All assembly welds are full penetration. All welds are crevice and undercut free. Weld finish & detail drawings available upon request.

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

#### Design Basis

ASME VIII Division 1.  
ATEX 94/9/EC (where applicable)

ATEX Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour & Liquid	135 °C (275 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

CE Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous & Dangerous	Gas / Vapour & Liquid	150 °C (302 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50



  

High Pressure Working Condition PED 97/23/EC			Maximum Pressure	
Fluid Group	State	Temperature	01A	01B
Non Dangerous	Gas / Vapour	205 °C (401 °F)	16.00 barg (232.06 psig)	16.00 barg (232.06 psig)
PED Conformity Assessment Category			SEP	SEP
Volume (litres)			0.75	0.50

### Physical Characteristics

Bowl Height	Dimensions (mm)			Typical Weight (Kg)
	'A'	'B'	'C'	
A Size 5" (125 mm)	75	226	130	1.5
B Size 2 1/2" (65 mm)	75	171	70	1.4

Dimensions are based on illustration shown (HIFCE01AABZS-BB-E-X). For accurate dimensions, please contact Parker domnick hunter.

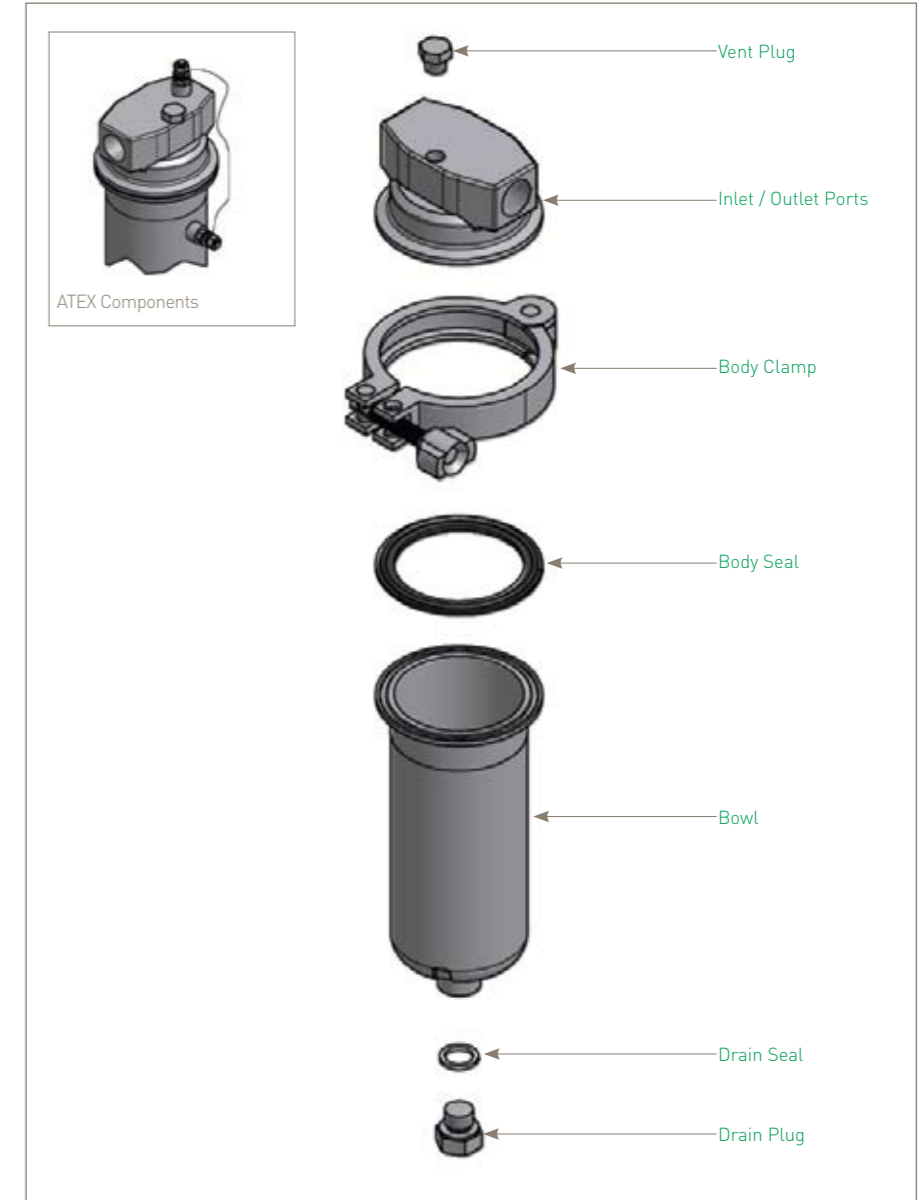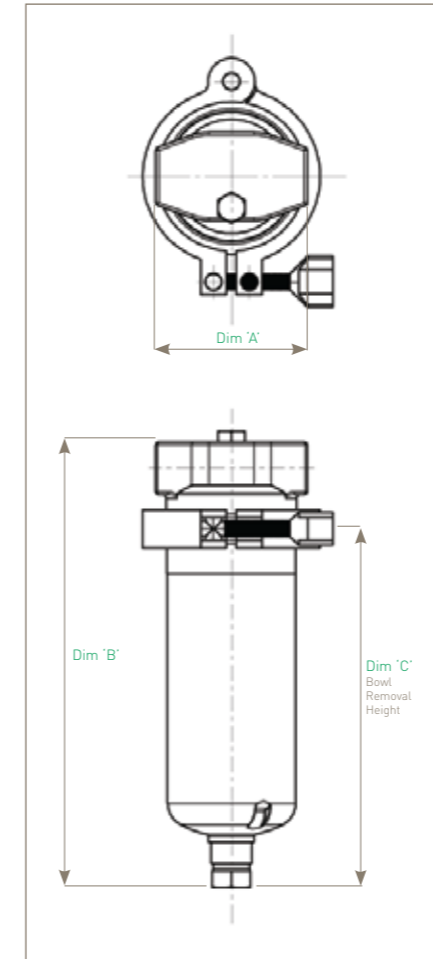

### Ordering Information

HIF	01									
Code   Vessel Class	Code   Length (Nominal)	Code   Connection Size	Code   Standard	Code   Cartridge	Code   Seal	Code   Vent	Code   Drain	Code   Surface Finish	Code   Tagged	
AT ATEX CE Standard HP High Pressure	A 5" [125 mm] B 2 1/2" [65 mm]	A 1/2" X 3/8"	B BSPP (F) N NPT (F)	Z 116	E EPDM P* PTFE S Silicone V Viton	B 1/4" BSPP N 1/4" NPT	B 1/4" BSPP N 1/4" NPT	Internal: Industrial Electropolished External: Polished 0.8 µm Ra	T Yes X No	

\* Double bolted clamp required

For Tagged Options customer identification numbers required at time of ordering



# Multi Housings

3 to 30 multi round cartridge housings



## **ZVA - Sanitary range air / gas housing**

Specifically designed for the pharmaceutical industry

## **VSL - Multi-element sanitary liquid housing**

Designed specifically for the pharmaceutical industry

## **VIL - Multi-element industrial liquid housing**

General purpose industrial housing

## **VSH - Multi-element liquid housing**

Designed for prefiltration & clarification applications

## **VIS - High flow steam**

Specifically designed for steam filtration



## ZVA Housings

- air / gas



- Sanitary range air / gas housing
- Specifically designed for the Pharmaceutical industry
- Laboratory and pilot scale to large industrial applications
- Flow efficient design with low pressure drop
- Steam jacketed and electrically heated options

### Specification

#### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM

#### Surface Finish

- Multis - Basic Specification
  - Internal: Inside of outlet assy and distribution box to be mechanically polished 0.8 µm Ra. Immerse entire vessel to achieve 100% pickle and passivation.
  - External: Grit blast 5 µm Ra mean

- Multis - Full Specification

- Internal: Electropolish 0.6 µm Ra
- External: Bright Polished 0.4 µm Ra

**Maximum Allowable Working Pressure (MAWP) PS**  
6 barg ( 87.0 psig)

**Maximum Allowable Working Temperature (MAWT) TS**  
120 °C (248 °F)

**Maximum Allowable Working Pressure Steam**  
3 barg (43.5 psig) @ 144 °C (291 °F)

#### Total Volume (litres)

031	032	033
31.0	40.0	49.0
051	052	053
45.0	58.0	72.0

#### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001. PED / PER conformity assessments based on Fluid Group 2 Gas (harmless) including steam. Only housings over PS.V 50 bar / litres bear the CE mark.

#### Design Basis

ASME VIII Division 1.



#### Custom Design

Parker domnick hunter offers a specialist and fabrication service allowing individual customer system specifications to be met.

### Physical Characteristics

Bowl Height	Dimensions (mm)	Typical Weight (Kg)		
'A'	'B'	'C'		
10" (250 mm)	336	794	320	43.0
20" (500 mm)	336	1044	570	47.0
30" (750 mm)	336	1294	820	50.0

Dimensions shown are for a ZVACE 3 round, 3" ANSI inlet / outlet connections. For the full range of dimensions and weights, please contact Parker domnick hunter.

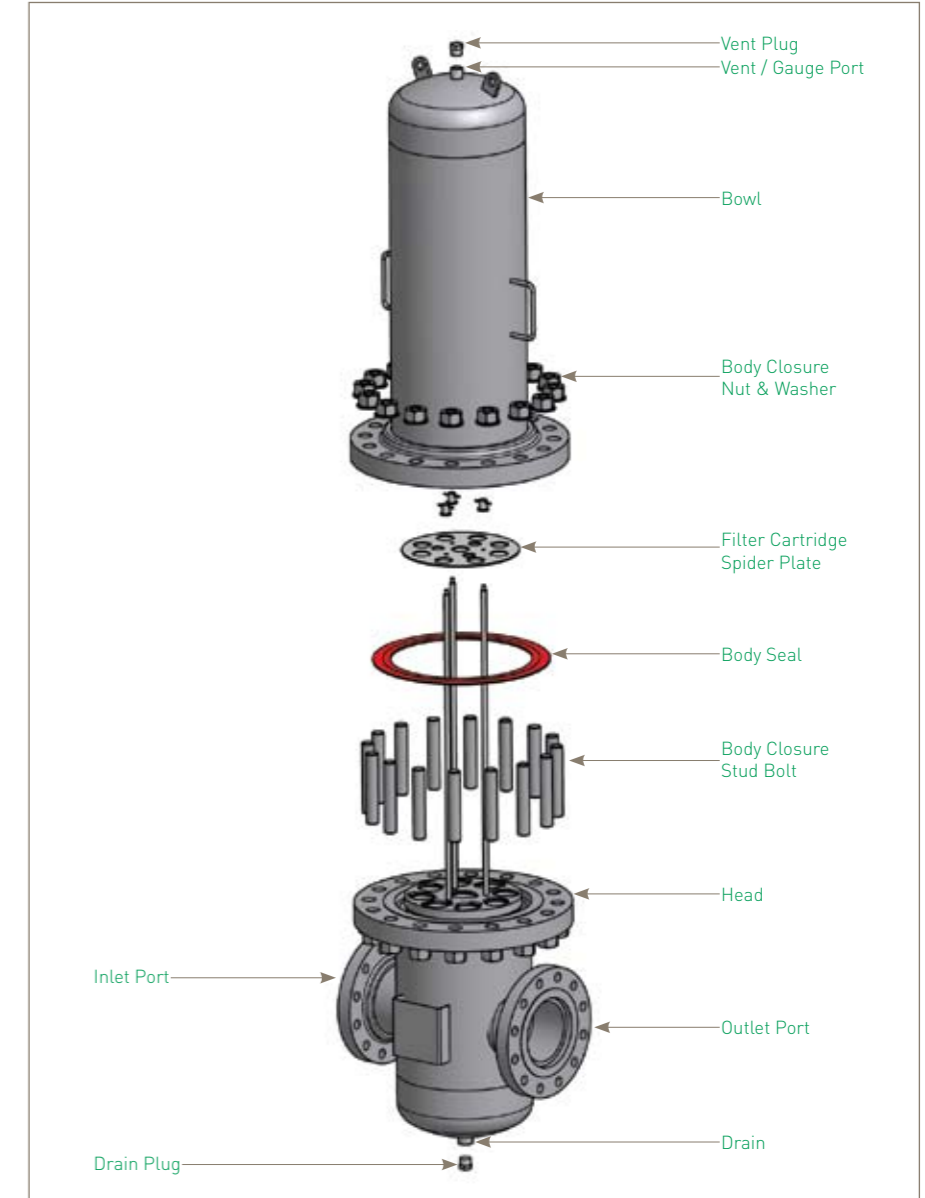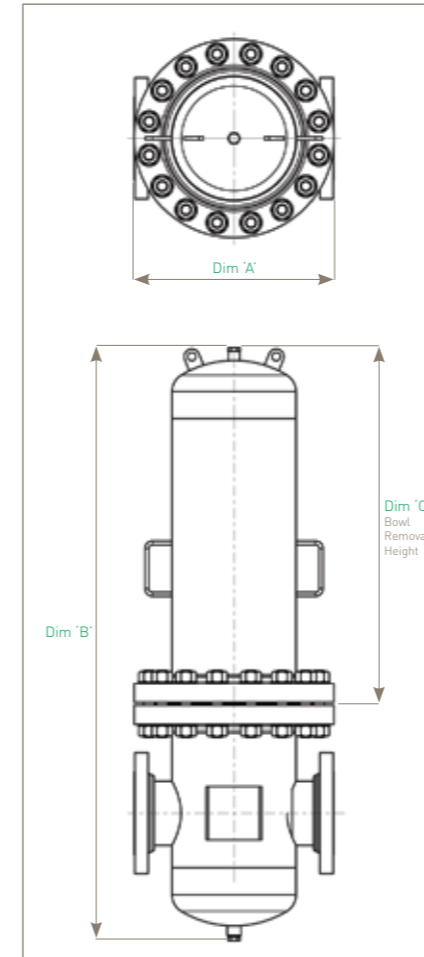

### Ordering Information

Code	Vessel Class	Code	N° of Cartridges	Code	Length (Nominal)	Code	Connection Size	Code	Connection Type	Code	Connection Standard	Code	Vent / Drain Conn. Type	Code	Surface Finish
CE	Standard	03	3	1	10" (250 mm)	D	3"	F	Flanged	A	NPT / ANSI	B	BSPP	C	Economy Spec
		05	5	2	20" (500 mm)	E	4"	W	Weld Prepared	N	Nominal Bore			F	Full Spec
		09	9	3	30" (750 mm)	G	6"			I	ISO				
		15	15			H	8"								

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

# VIS Housings

- high flow steam

- Specifically designed to maximise flow rates and minimise pressure drop
- Compatible with JUMBO element to maximise steam capacity



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM

### Surface Finish

- Internal: Inside of outlet and distribution box to be mechanically mirror polished 0.8 µm Ra. Immerse vessel to achieve 100% pickle and passivation.
- External: Grit blast 5 µm Ra mean

### Maximum Allowable Working Pressure (MAWP) PS

7 barg [101.5 psig]

### Maximum Allowable Working Temperature (MAWT) TS

170.5 °C [339 °F]

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 N° 2001. PED / PER Conformity assessments based on Fluid Group 2 Gas (harmless) allowing for in-situ steam sterilisation. Only housings over PS.V 50 bar / litres bear the CE mark.



### Design Basis

ASME VIII Division 1.

## Physical Characteristics

Type	Dimensions (mm)			Typical Weight [Kg]
	'A'	'B'	'C'	
VISCE-01J-DD	300	763	310	30.0
VISCE-01J-ED	330	895	140	50.0
VISCE-3J-DD	515	1049	410	100.0
VISCE-3J-ED	700	1237	490	150.0

For the full range of dimensions and weights, please contact Parker domnick hunter.

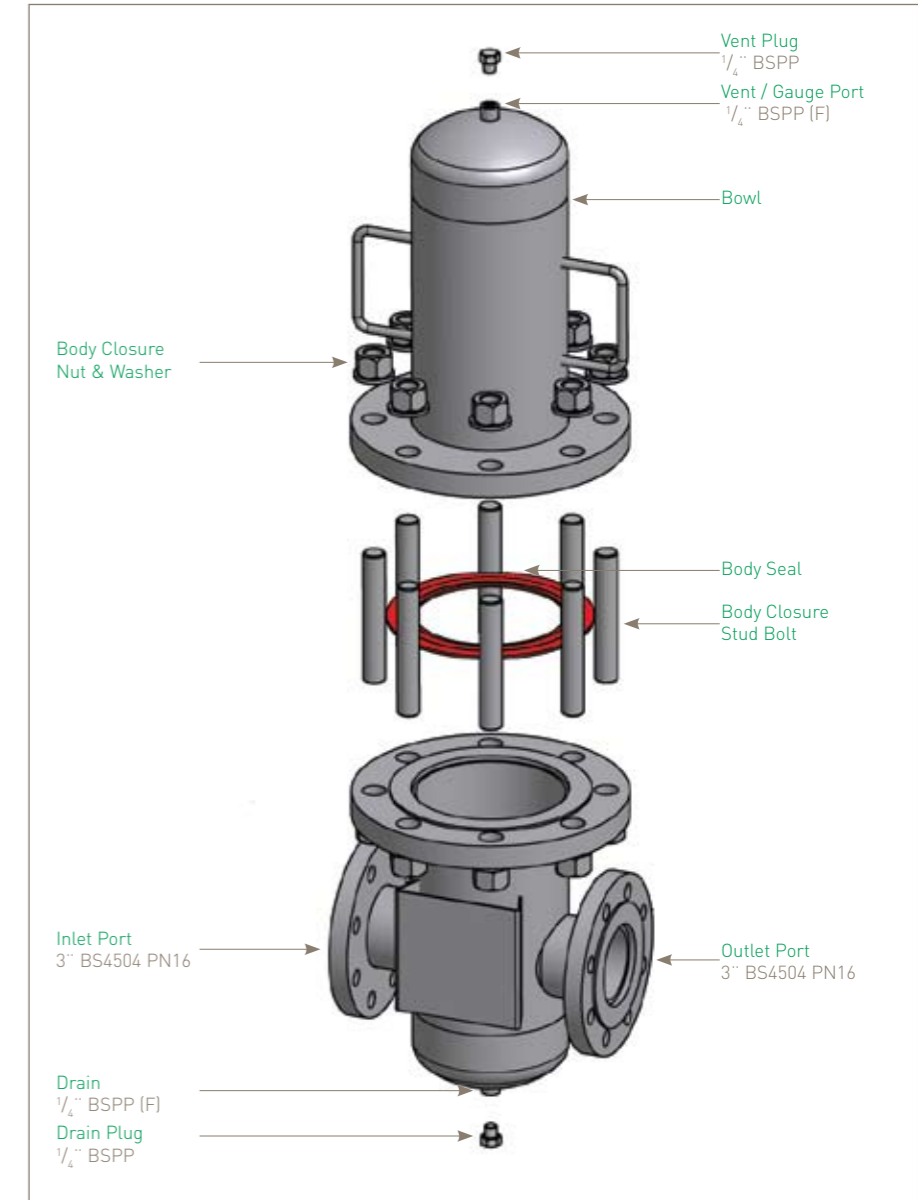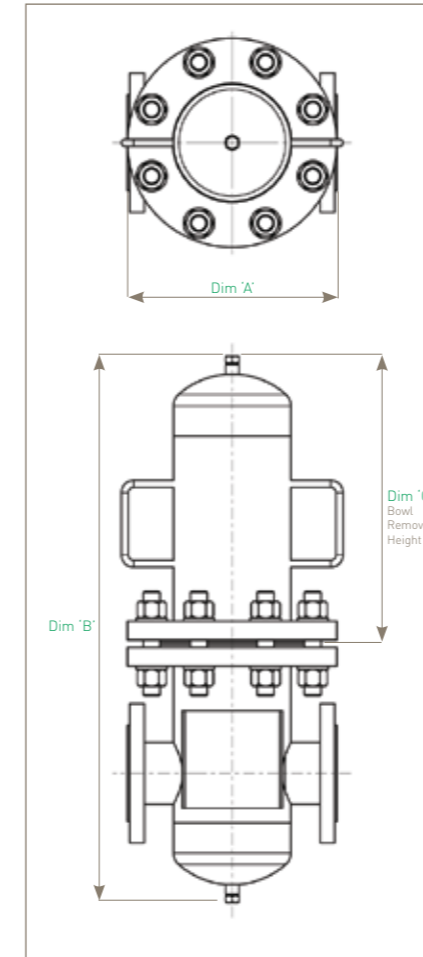

## Ordering Information

VIS  -   -

Code   Vessel Class	Code   N° of Cartridges	Code   Length (Nominal)	Code   Connection Size	Code   Connection Type
CE Standard	01 1 03 3	J Jumbo	D* 3" E* 4" G** 6" H** 8"	D BS4504 PN16 Flange A ANSI cl. 150 Flange

\* Single housings only  
\*\* Round housings only

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

# VSL Housings

- sanitary liquid

- Multi-element sanitary liquid housing
- Designed specifically for the pharmaceutical industry
- Electropolished internal finish



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM

### Surface Finish

- Internal: Electropolished 0.4 µm Ra
- External: Polished 0.25 µm Ra

### Economy Spec

An economy version is available with a lower specification, external finished to 0.8 µm Ra.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 N° 2001. PED / PER Conformity assessments based on Fluid Group 2 Gas (harmless) allowing for in-situ steam sterilisation. Only housings over PS.V 50 bar / litres bear the CE mark.

### Design Basis

ASME VIII.

### Custom Design



Parker domnick hunter offers a specialist and fabrication service allowing individual customer system specifications to be met.

Working Condition PED 97/23/EC			Maximum Pressure		
Fluid Group	State	Temperature	3 / 5 Round	3 / 5 Round	3 / 5 Round
Non Dangerous	Liquids	80 °C [176 °F]	7.00 barg (101.50 psig)	7.00 barg (101.50 psig)	7.00 barg (101.50 psig)
Dangerous / Non Dangerous	Gas / Vapour	144 °C [297 °F]	3.00 barg (43.50 psig)	3.00 barg (43.50 psig)	3.00 barg (43.50 psig)
PED Conformity Assessment Category			CAT I	CAT II	CAT II
Volume (litres)			10.7	18.5	26.3

## Physical Characteristics

Type	Dimensions (mm)			Typical Weight (Kg)
	'A'	'B'	'C'	
10" (250 mm)	271	493	320	18.0
20" (500 mm)	271	743	570	22.0
30" (750 mm)	271	993	820	26.0

Dimensions shown are for a 3 Round VSL, 2" TCF inlet / outlet connections. For the full range of dimensions and weights, please contact Parker domnick hunter.

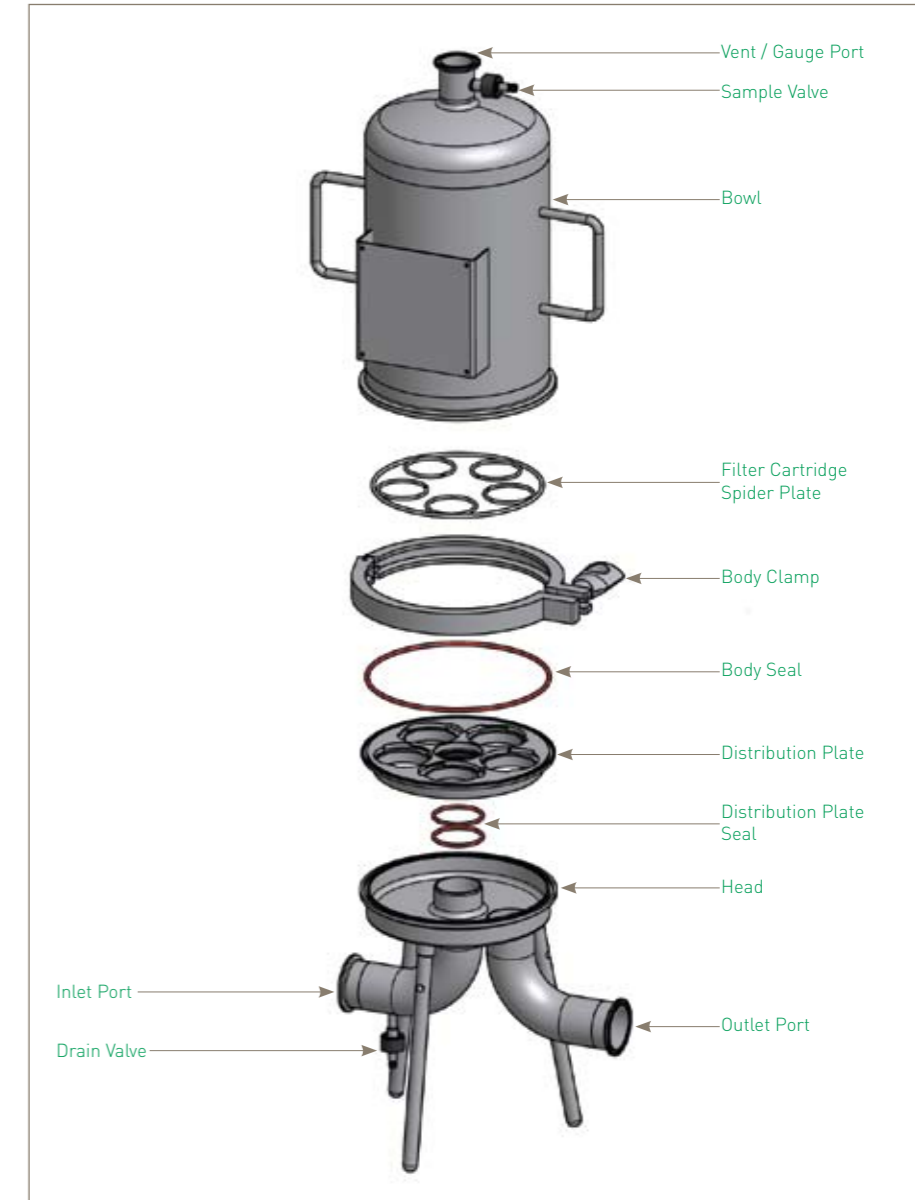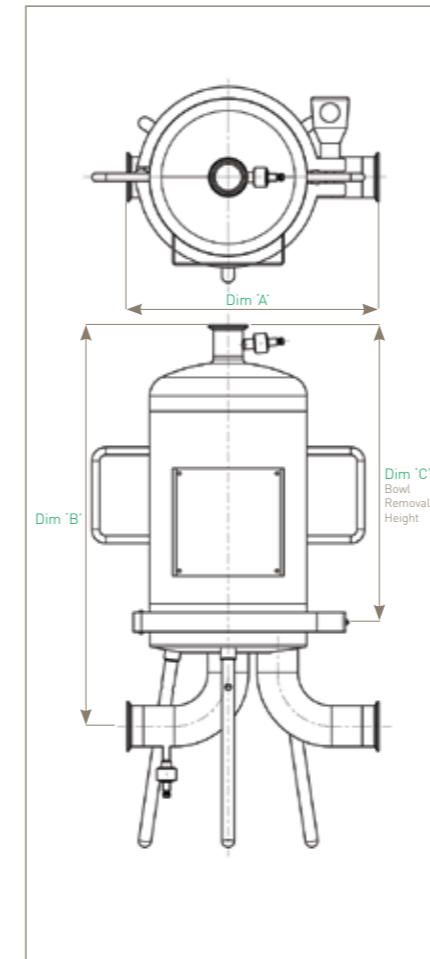

## Ordering Information

Code   Vessel Class	Code   N° of Cartridges	Code   Length (Nominal)	Code   Connection Size	Code   Connection Type	Code   Connection Standard	Code   Connection Type	Code   Seal
CE Standard	03 3 05 5	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm)	C 2"	T Tri-Clamp	B British Standard D DIN 07* Economy Series	B Sanitary Bleed T Tri-Clamp	E EPDM P PTFE S Silicone V Viton

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

\*Code finishes here, no mention of drain and seals

# VIL Multi Filter Housing

- industrial multi liquid

- Multi-element industrial liquid housing
- Laboratory and pilot scale to large industrial applications
- Flow efficient design with low pressure drop



## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM

### Surface Finish

- Internal / External:
  - DOE Economy: As fabricated then pickled to remove weld discoloration
  - DOE Standard: As fabricated then electropolished
  - P-7 [226] o-ring: As fabricated then electropolished

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory Pressure Equipment Regulations (PER) 1999 N° 2001.

### Design Basis

ASME VIII Division 1.

### Custom Design



Parker domnick hunter offers a specialist and fabrication service allowing individual customer system specifications to be met.

Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	3 / 5 Round	8 Round	12 Round	
Non Dangerous	Liquids	80 °C [176 °F]	10.00 barg (145.00 psig)	8.50 barg (123.00 psig)	6.00 barg (87.00 psig)	
PED Conformity Assessment Category			SEP	SEP	SEP	
Volume (litres)			031	032	033	
			14.0	19.0	24.0	
			051	052	053	054
			20.0	28.0	36.0	44.0
			082	083	084	
			70.0	87.0	104.0	
122	123	124				
98.0	122.0	146.0				

## Physical Characteristics

Type	Dimensions (mm)	Typical Weight (Kg)		
	'A'	'B'	'C'	
10" (250 mm)	222	720	70	14.0
20" (500 mm)	222	970	70	16.0
30" (750 mm)	222	1220	70	18.0
40" (1000 mm)	222	1470	70	20.0

Dimensions shown are for a 3 Round VIL, 2" BSPP inlet / outlet connections. For the full range of dimensions and weights, please contact Parker domnick hunter.

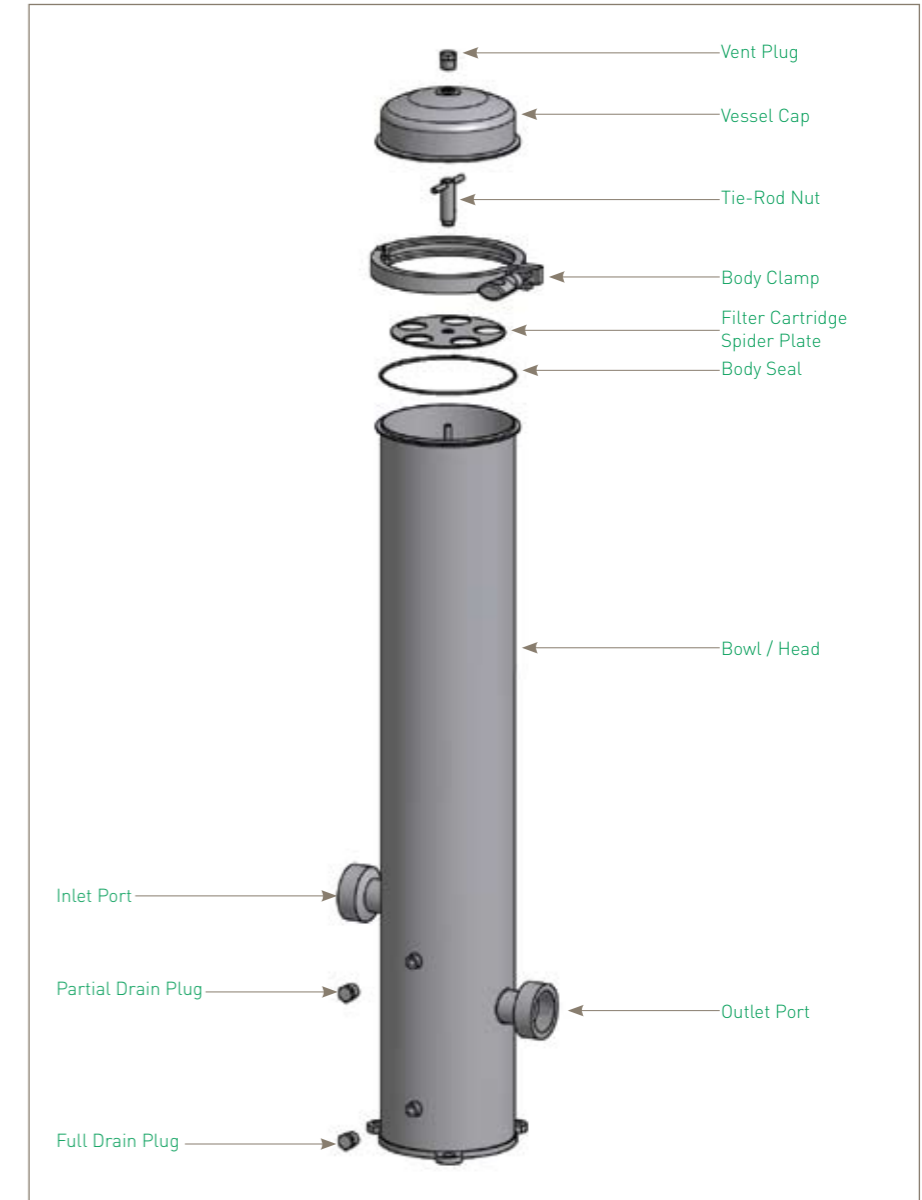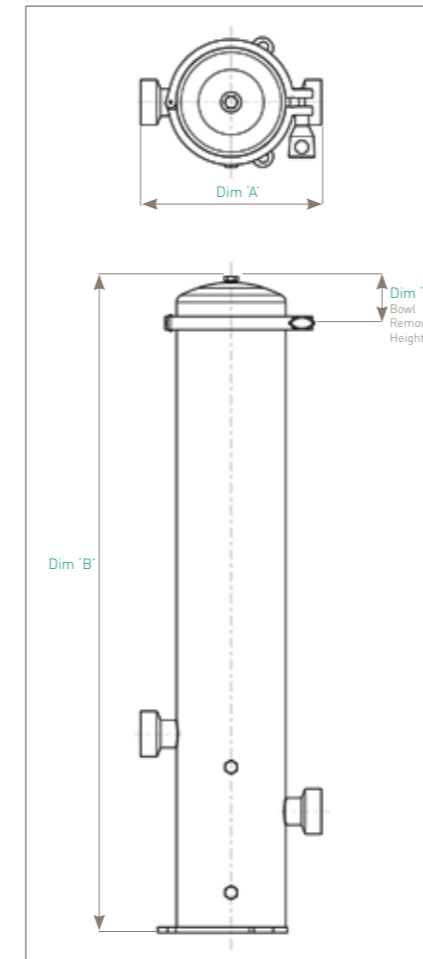

## Ordering Information

VIL																			
Code   Vessel Class	Code   N° of Cartridges	Code   Length [Nominal]	Code   Connection Size	Code   Connection Type	Code   Connection Style	Code   Seals	Code   Surface Finish	Code   Flange Type*	Code   Cartridge Length [dh standard]										
CE Standard	03 3 05 5 08 8 12 12	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm) 4 40" (1000 mm)	C 2" D 3" E 4"	B BSPP Female F Flanged N NPT Female	B DOE C P-7	E EPDM P*** PTFE S Silicone V Viton	E Electropolished P** Pickled	15 ANSI cl. 150 45 BS4504	S Slimline L 10", 20", 30", 40"										

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

- \* Only applicable for housings with flange connection type
- \*\* Pickled finish option only available for DOE housings
- \*\*\* PTFE seal option requires flanged closure

# VSH Multi Housings

- beverage



- Multi-element sanitary liquid housing
- Designed specifically for the food and beverage industry
- High quality crevice free construction
- Available in 3 to 30 round versions
- Steam sterilisable

## Specification

### Materials of Construction

- Housing: 316L Stainless Steel
- Seals: Silicone

### Surface Finish

- Internal: Mechanically Polished Ra <0.8 µm
- External: Mechanically Polished

### Steam Sterilisation

Refer to Parker domnick hunter for individual housing parameters.

### Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 N° 2001.

### Design Basis

ASME VIII Division 1.

### Custom Design

Parker domnick hunter offers a specialist and fabrication service allowing individual customer system specifications to be met.



Note: For 12, 18, 24 and 30 Round options, please contact Parker domnick hunter for detailed technical drawings.

Working Condition PED 97/23/EC			Maximum Pressure			
Fluid Group	State	Temperature	031	032	033	034
Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)
Dangerous	Gas / Vapour	0 - 150 °C (0 - 302 °F)	4.80 barg (98.62 psig)	3.90 barg (56.56 psig)	2.80 barg (40.61 psig)	2.10 barg (30.45 psig)
Non Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Non Dangerous	Liquid	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Non Dangerous	Gas / Vapour	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)
Volume (litres)			7.3	12.6	17.8	23.1
Fluid Group	State	Temperature	051	052	053	054
Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)
Dangerous	Gas / Vapour	0 - 150 °C (0 - 302 °F)	4.50 barg (65.26 psig)	2.40 barg (34.80 psig)	1.70 barg (24.65 psig)	1.30 barg (18.85 psig)
Non Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Non Dangerous	Liquid	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	9.90 barg (143.58 psig)	6.80 barg (98.62 psig)	5.20 barg (75.41 psig)
Non Dangerous	Gas / Vapour	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	6.80 barg (98.62 psig)	5.20 barg (75.41 psig)
Volume (litres)			11.0	20.0	29.1	38.2
Fluid Group	State	Temperature	081	082	083	084
Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Dangerous	Liquid	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)
Dangerous	Gas / Vapour	0 - 150 °C (0 - 302 °F)	2.30 barg (33.35 psig)	1.40 barg (20.30 psig)	1.00 barg (14.50 psig)	0.70 barg (10.15 psig)
Non Dangerous	Liquid	0 - 40 °C (0 - 104 °F)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)	10.00 barg (145.03 psig)
Non Dangerous	Liquid	150 °C (302 °F)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)	7.50 barg (72.51 psig)
Non Dangerous	Gas / Vapour	0 - 40 °C (0 - 104 °F)	9.40 barg (136.33 psig)	5.60 barg (81.22 psig)	4.00 barg (58.01 psig)	3.10 barg (44.96 psig)
Non Dangerous	Gas / Vapour	150 °C (302 °F)	7.50 barg (72.51 psig)	5.60 barg (81.22 psig)	4.00 barg (58.01 psig)	3.10 barg (44.96 psig)
Volume (litres)			21.3	35.3	49.7	63.9
PED Conformity Assessment Category			CAT I	CAT I	CAT I	CAT I

## Physical Characteristics

Type	Dimensions (mm)	Typical Weight (Kg)		
	'A'	'B'	'C'	
10" (250 mm)	606	840	290	27.0
20" (500 mm)	606	1060	540	30.0
30" (750 mm)	606	1310	790	33.0
40" (1000 mm)	606	1560	1040	36.0

Dimensions shown are for an 8 Round VSH, DN40 DIN2633 inlet / outlet connections. For the full range of dimensions and weights, please contact Parker domnick hunter.

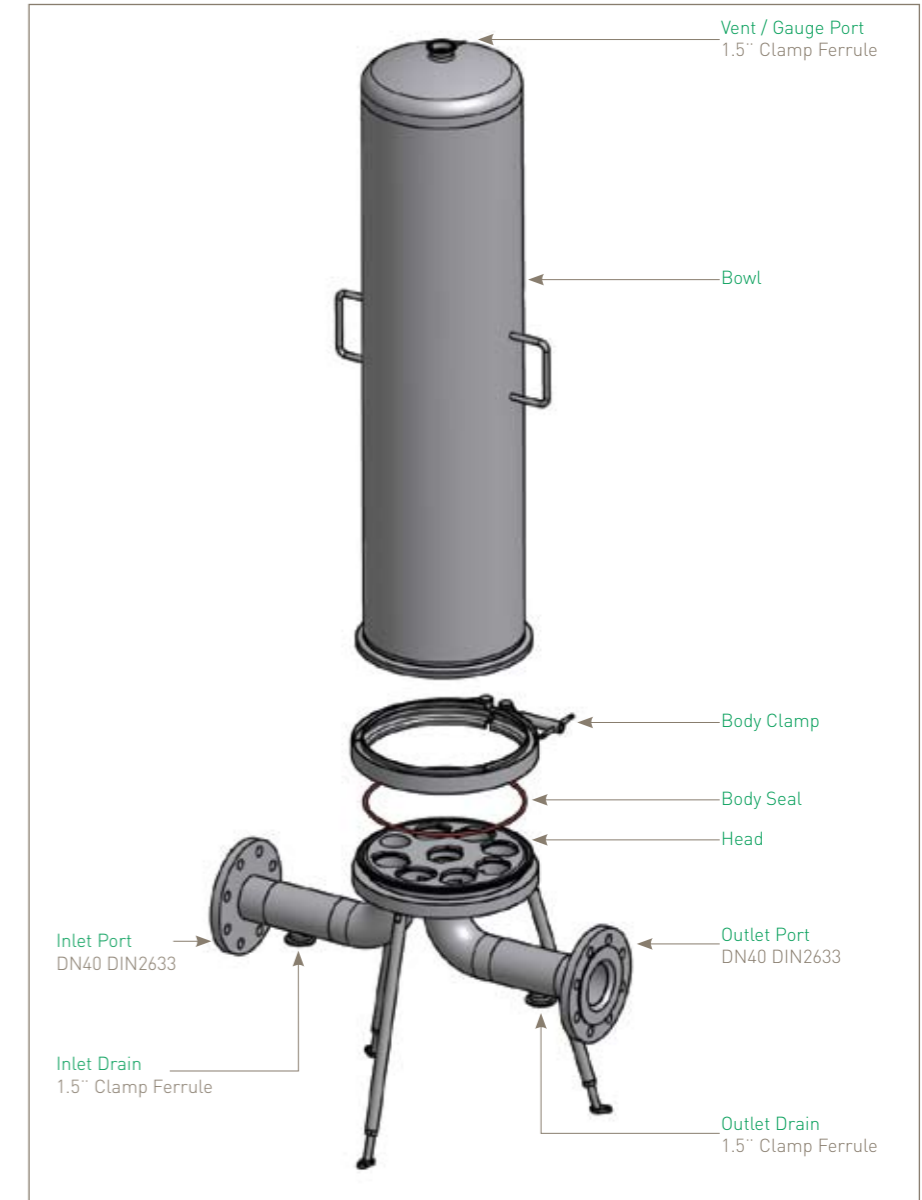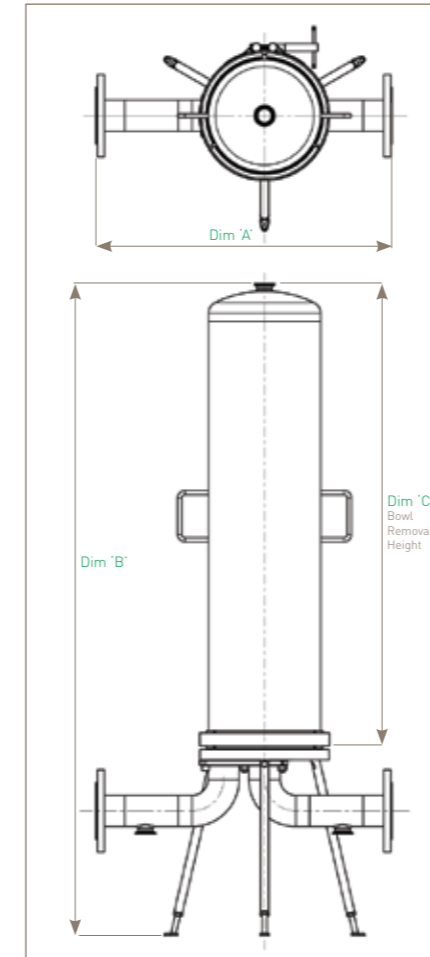

## Ordering Information

VSH [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]


Code   Vessel Class	Code   N° of Cartridges	Code   Length (Nominal)	Code   Connection Size	Code   Connection Type	Code   Connection Standard	Code   Vent / Drain Conn. Type	Code   Seal
CE Standard	03 3 05 5 08 8 12 12 18 18 24 24 30 30	1 10" (250 mm) 2 20" (500 mm) 3 30" (750 mm) 4 40" (1000 mm)	B 1" C 1.5" & 2" X 2.5" D 3" E 4"	D DIN Male F Flanged M SMS Male R RJT Male T Tri-Clamp W Weld Prepared	A NPT / ANSI B British D DIN I ISO	T Tri-Clamp	E EPDM S Silicone V Viton

Note: 3, 5 and 8 Round housings available with 10", 20", 30" and 40" bowls  
12, 18, 24 and 30 Round housings available with 20" and 30" bowls only

N° of Cartridges   Connection Size Availability	1.5"	2"	2.5"	3"	4"
03	✓				
05	✓	✓			
08	✓	✓	✓		
12				✓	✓
18				✓	✓
24				✓	✓
30				✓	✓

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

# Accessories

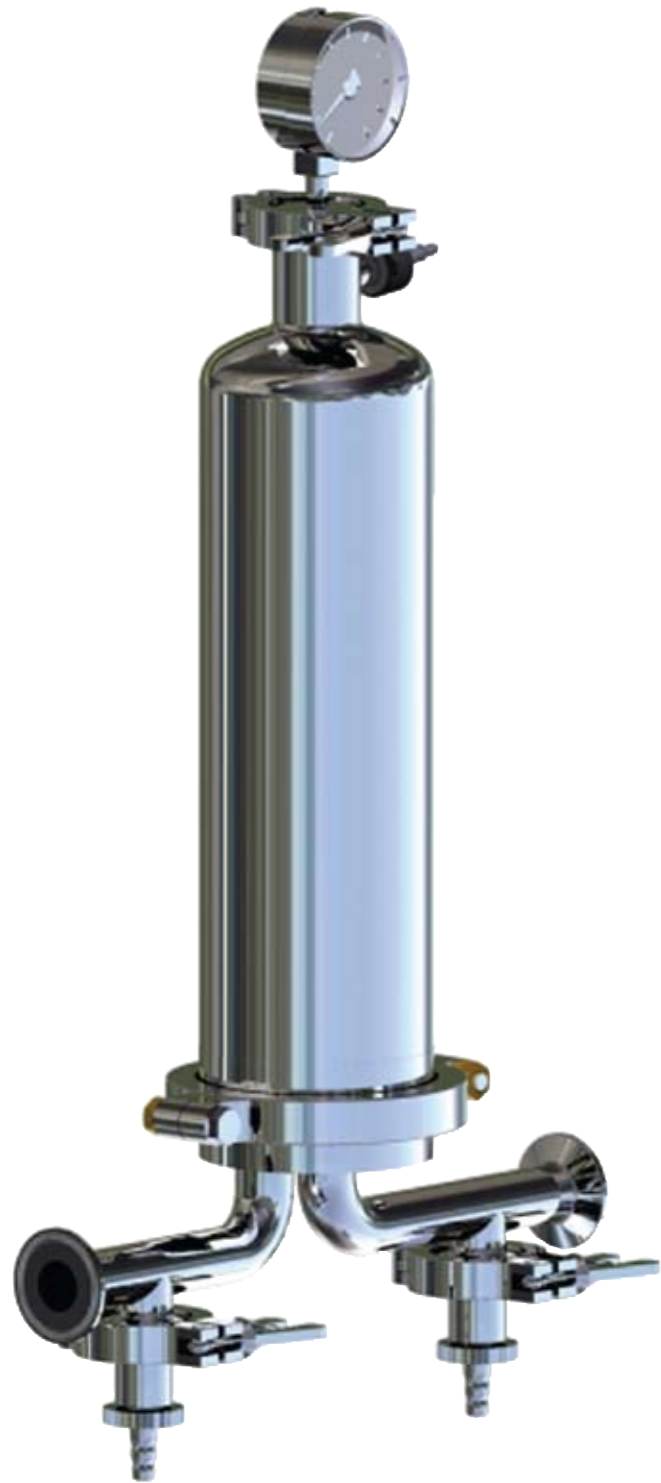

## Gauges

Industry & product specific options

## Valves

Comprehensive range of manual valves

## Spares

Replacement parts & accessories

## Certificates

Comprehensive range of supporting documentation



Parker domnick hunter provide a comprehensive range of pressure gauges to support their standard air / gas and liquid housings.

HIL Pressure Gauge			
Type	Connection	Pressure	Ordering Code
All stainless steel wetted parts with glycerine fill fluid. Design temperature 135 °C (275 °F). Cooling tower required for temperatures up to 205 °C (401 °F). See spares page 80.	1/4" BSP	0 - 10 barg	XP6SS03BS17
		0 - 16 barg	XP6SS03BS18
	1/4" NPT	0 - 10 barg	XP6SS03NP2
		0 - 16 barg	XP6SS03NP3



HBA & HIF Pressure Gauge			
Type	Connection	Pressure	Ordering Code
All stainless steel wetted parts with glycerine fill fluid (includes adapter for plain 1/2" BSPP connection). Design temperature 135 °C (275 °F). Cooling tower required for temperatures up to 205 °C (401 °F). See spares page 80.	1/2" BSP	0 - 10 barg	XP6SS03BS15
		0 - 16 barg	XP6SS03BS16
	1/2" NPT	0 - 10 barg	XP6SS03NP2
		0 - 16 barg	XP6SS03NP3



HSL Single & VSH Multi Pressure Gauge		
Type	Pressure / Temperature	Ordering Code
Sanitary gauge with double sanitary valves and sight glass for beverage applications. Glycerine gauge fill fluid.	0 - 10 barg / 150 °C (302 °F)	XG6SS08TC1



HSL Single & VSH Multi Pressure Gauge Valve Manifold		
Type	Pressure / Temperature	Ordering Code
Sanitary gauge manifold with double sanitary valves without sight glass, for applications where glass not allowed. (Manifold and quick release only. Does not include gauge, clamp and seal.)	0 - 10 barg / 150 °C (302 °F)	XMISS06TC1



HSL Single & VSH Multi Pressure Gauge		
Type	Pressure / Temperature	Ordering Code
Sanitary gauge with single sanitary valve. Glycerine gauge fill fluid.	0 - 10 barg / 150 °C (302 °F)	XP6SS08TC1



Single, VSH & VSL Multi Pressure Gauge		
Type	Pressure / Temperature	Ordering Code
Sanitary gauge with 1" and 1 1/2" tri-clamp connection and hygienic diaphragm. All stainless steel wetted parts with KN92 FDA approved fill fluid.	0 - 10 barg / 150 °C (302 °F)	XP6SS06TC4



Parker domnick hunter provide a comprehensive range of manual valves to support their standard air / gas and liquid housings.

Industrial 1 Piece Ball Valve		
Type	Connection	Ordering Code
316 stainless steel 1 piece ball valve with PTFE ball. Male / female.	1/4" BSP	XVASS03BS
	1/4" NPT	XVASS03NP



2 Piece Ball Valve		
Type	Connection	Ordering Code
316 stainless steel semi-sanitary ball valve. (for use on up-stream connection on sanitary liquid beverage or pharmaceutical housings)	1 / 1 1/2" Tri-Clamp - 20 mm Hosebarb	XVASS06TC



Butterfly Valves		
Type	Variant	Ordering Code
Stainless steel butterfly valve with silicone seals and polymer handle.	1" OD x 1.6 Weld End	XVASS050D1/VHPL
	1 1/2" OD x 1.6 Weld End	XVASS060D1/VHPL
	2" OD x 1.6 Weld End	XVASS070D1/VHPL
	2 1/2" OD x 1.6 Weld End	XVASS080D1/VHPL
	3" OD x 1.6 Weld End	XVASS090D1/VHPL
	DN25 DIN11851	XVASS05DN1/VHPL
	DN40 DIN11851	XVASS06DN1/VHPL
	DN50 DIN11851	XVASS07DN1/VHPL
	DN65 DIN11851	XVASS08DN1/VHPL
	DN80 DIN11851	XVASS09DN1/VHPL
	1" Tri-clamp Ferrule	XVASS05TC4/VHPL
	1 1/2" Tri-clamp Ferrule	XVASS06TC4/VHPL
	2" Tri-clamp Ferrule	XVASS07TC4/VHPL
	2 1/2" Tri-clamp Ferrule	XVASS08TC4/VHPL
3" Tri-clamp Ferrule	XVASS09TC4/VHPL	



Sanitary Bleed Valve			
Type	Seals	Variant	Ordering Code
316 stainless steel sanitary bleed valve with Neoprene grip. Available with EPDM, Silicon, Viton or Perlast Seals. Available with Rectus 21, Staubli RBE03 or 8 mm hosebarb.	EPDM	Staubli RBE03 Male	XVASS30NA1
		Rectus 21 Male	XVASS30RT
		8 mm Hosebarb	XVASS30HB
	Silicone	Staubli RBE03 Male	XVASS30ST1
		Rectus 21 Male	XVASS30RT1
		8 mm Hosebarb	XVASS30HB1
	Viton	Staubli RBE03 Male	XVASS30NA4
		Rectus 21 Male	XVASS30RT2
		8 mm Hosebarb	XVASS30HB2
	Perlast	Staubli RBE03 Male	XVASS30NA2
		Rectus 21 Male	XVASS30RT3
		8 mm Hosebarb	XVASS28SL15



Sample Valve		
Type	Connection	Ordering Code
316 stainless steel sanitary valve with 1" / 1 1/2" tri-clamp connection and 12 mm hosebarb. For use on down-stream connection on sanitary liquid housings.	1 / 1 1/2" Tri-Clamp - Stepped 12 mm Hosebarb	XVASS05TC3



Gemü Diaphragm Valve			
Type	Connection	Variant	Ordering Code
316 stainless steel sanitary diaphragm valve with 1/2" (miniclam) tri-clamp connection and silicone or EPDM diaphragm.	1/2" (miniclam) tri-clamp	Silicone	XVASS04TC6
		EPDM	XVASS04TC1
		Viton	XVASS04TC7
		PTFE	XVASS04TC8





Parker domnick hunter provide a comprehensive range of spare parts to support their standard air / gas and liquid housings.

4" Spares		2 1/2" & 4" Spares		3 Round VSH Spares	
Size & Type	Part Code	Size & Type	Part Code	Size & Type	Part Code
4" Single Pin Tri-Clamp 4" Double Bolt Tri-Clamp	XTCSS10SL XTCSS10HP15	1/4" BSP Plug 1/4" NPT Plug	XPLSS03BS4 XPLSS03NP1	3 Round Body V Clamp	XBCSS51BL
4" TCF Gasket EPDM 4" TCF Gasket Silicone 4" TCF Gasket Viton 4" Gasket PTFE	XTSEP10SA XGKSI3004 XTSV10SL XTSPT10SL	1/4" BSP PTFE Plug Seal ATEX Earth Kit (Replacement)	XGKPT03BP XEKSS00AT	3 Round Spider Plate	XSPSS51BL
HIL 222 Spring HIL DOE Nut	XSNS070D XNTSS011L	1/2" Tri-Clamp Blanking Kit - EPDM 1/2" Tri-Clamp Blanking Kit - Silicone 1/2" Tri-Clamp Blanking Kit - Viton 1/2" Tri-Clamp Blanking Kit - PTFE	XAKSS06TC6 XAKSS06TC3 XAKSS06TC7 XAKSS06TC8	Body O-Ring BS362 - Silicone	XORSI12BL
		1/2" Tri-Clamp Blanking Kit - EPDM 1/2" Tri-Clamp Blanking Kit - Silicone 1/2" Tri-Clamp Blanking Kit - Viton 1/2" Tri-Clamp Blanking Kit - PTFE	XAKSS04TC1 XAKSS04TC2 XAKSS04TC3 XAKSS04TC4	1 1/2" Head to Elbow Gasket - PTFE	XGKPT06BL
		1/2" Tri-Clamp Gasket - EPDM 1/2" Tri-Clamp Gasket - Silicone 1/2" Tri-Clamp Gasket - Viton 1/2" Tri-Clamp Gasket - PTFE	XGKEPTC XTSSI06 XGKVI06TC2 XGKPT06TC		
		1/2" Tri-Clamp Gasket - EPDM 1/2" Tri-Clamp Gasket - Silicone 1/2" Tri-Clamp Gasket - Viton 1/2" Tri-Clamp Gasket - PTFE	XGKEP04TC1 XGKI04TC XGKVI04TC XGKPT04TC		
		Sanitary Seal Kit - EPDM Sanitary Seal Kit - Silicone Sanitary Seal Kit - Viton Sanitary Seal Kit - Perlast	XOREP30 XORSI30 XORVI30 XORPE30NA1		
		1/2" TC Blank 1/2" TC Clamp	XTBSS05TC XTCSS05TC		
		1/2" TC Blank 1/2" TC Clamp	XTBSS04TC XTCSS04TC		
		Cooling Tower 1/2" BSPP Cooling Tower 1/2" NPT	XCTSS03BS XCTSS03NP		
2 1/2" Spares				5 Round VSH Spares	
Size & Type	Part Code	Size & Type	Part Code	Size & Type	Part Code
2 1/2" Single Pin Tri-Clamp 2 1/2" Double Bolt Tri-Clamp	XTCSS08SA XTCSS08HP	1/2" Tri-Clamp Gasket - EPDM 1/2" Tri-Clamp Gasket - Silicone 1/2" Tri-Clamp Gasket - Viton 1/2" Tri-Clamp Gasket - PTFE	XGKEPTC XTSSI06 XGKVI06TC2 XGKPT06TC	5 Round Body V Clamp	XBCSS52BL
2 1/2" TCF Gasket EPDM 2 1/2" TCF Gasket Silicone 2 1/2" TCF Gasket Viton 2 1/2" Gasket PTFE	XGKEP08NA XGKSI08 XGKVI08SA XGKPT10SA	1/2" Tri-Clamp Gasket - EPDM 1/2" Tri-Clamp Gasket - Silicone 1/2" Tri-Clamp Gasket - Viton 1/2" Tri-Clamp Gasket - PTFE	XGKEP04TC1 XGKI04TC XGKVI04TC XGKPT04TC	5 Round Spider Plate	XSCSS52BL
		Sanitary Seal Kit - EPDM Sanitary Seal Kit - Silicone Sanitary Seal Kit - Viton Sanitary Seal Kit - Perlast	XOREP30 XORSI30 XORVI30 XORPE30NA1	Body O-Ring BS370 - Silicone	XORSI12BL1
		1/2" TC Blank 1/2" TC Clamp	XTBSS05TC XTCSS05TC	2" Head to Elbow Gasket - PTFE	XGKPT07
		1/2" TC Blank 1/2" TC Clamp	XTBSS04TC XTCSS04TC		
		Cooling Tower 1/2" BSPP Cooling Tower 1/2" NPT	XCTSS03BS XCTSS03NP		
				8 Round VSH Spares	
Size & Type	Part Code	Size & Type	Part Code	Size & Type	Part Code
8 Round Body V Clamp	XBCSS52BL	8 Round Spider Plate	XSPSS52BL	8 Round Body V Clamp	XBCSS52BL
8 Round Spider Plate	XSPSS52BL	Body O-Ring BS378 - Silicone	XORSI13BL	8 Round Spider Plate	XSPSS52BL
Body O-Ring BS378 - Silicone	XORSI13BL	3" Head to Elbow Gasket - PTFE	XGKPT07	Body O-Ring BS378 - Silicone	XORSI13BL
3" Head to Elbow Gasket - PTFE	XGKPT07			3" Head to Elbow Gasket - PTFE	XGKPT07
				VSH Spares	
Size & Type	Part Code	Size & Type	Part Code	Size & Type	Part Code
3, 5 & 8 Round Vent and Drain Clamp / Gasket Kit	XAKSS06TC5				

# Industrial Products

Parker domnick hunter, Industrial Division, is a well established global business capable of meeting the compressed air treatment product needs of all industries. Our commitment to customer satisfaction goes beyond initial supply and installation. Comprehensive after sale support includes servicing, spare parts, quality testing and technical advice.

Bespoke design services are also available for customised projects to ensure customer specifications are met. Services are delivered locally by our global network of qualified service engineers.



### LAB GAS GENERATORS

#### Hydrogen, nitrogen & zero air

The range of analytical gas generators from Parker domnick hunter includes UHP hydrogen, nitrogen and zero air and enables users to produce a cost-effective, continuous supply of premium quality gas from a compact, on-site source.

- Increases safety with the elimination of high pressure gas storage or cylinder handling
- Cost-effective due to low life-cycle ownership
- UHP hydrogen generators facilitate optimised analysis
- Convenient, on-demand gas supply

### MAXIGAS

#### Nitrogen gas generators

Produces on-site nitrogen gas from compressed air and is the cost-effective alternative to traditional nitrogen sources for multiple applications. Excellent energy efficiency and a low life-cycle ownership cost facilitate considerable cost savings of up to 90%.

- Low life-cycle ownership cost and elimination of costs associated with a cylinder supply
- On-demand functionality limits waste
- Energy efficient; operates from a small compressor

### MIXED GAS DISPENSERS

#### CO<sub>2</sub> & nitrogen

Designed to provide bar owners with the ideal supply of mixed gas blends of CO<sub>2</sub> and nitrogen for beer dispensing. The system uses a nitrogen generator which, when connected to CO<sub>2</sub> cylinders, can produce mixed blends of CO<sub>2</sub> and nitrogen in a number of predetermined ratios.

- Improved quality and economy
- Nitrogen purity of 99.8%
- A more efficient operation
- Improved shelf life



### WS WATER SEPARATORS

#### Bulk liquid removal

Providing efficient bulk liquid removal at all flow conditions, OIL-X EVOLUTION WS Water Separators also minimise energy consumption and help reduce your carbon footprint.

- Tested in accordance with ISO8573.9
- Performance independently verified
- Low pressure loss / low operational cost



### OIL-X EVOLUTION

#### Compressed air filters

Providing air quality that meets or exceeds the requirements of ISO8573-1, the international standard for compressed air quality, OIL-X EVOLUTION is also the most energy efficient compressed air filter in the world, helping to reduce your carbon footprint.

- The most energy efficient filters available
- High quality ISO8573.1:2001 compressed air
- Running costs that start low and stay low



### CRD

#### Refrigeration dryers

Avoid corrosion, machinery failure and product spoilage by removing water from any compressed system at affordable prices. The CRD range provides the very latest in drying technology and is suitable for all compressor types.

- Clean, dry compressed air, stops damage and corrosion
- Environmentally friendly R407C refrigerant
- Energy efficient, low running costs



### PNEUDRI

#### Desiccant dryers

Providing water vapour removal in accordance with Classes 1, 2 & 3 of ISO8573-1 the international standard for compressed air quality, PNEUDRI modular compressed air dryers offer unrivalled performance, flexibility and expandability in a unique space saving design. Low operational costs and integrated energy management systems also ensure energy consumption is kept to a minimum.

- Highest quality air
- Totally stops corrosion / damage
- Low installation costs
- Energy efficient



### ES2000 SERIES

#### Oil / water separators

Providing a legal and responsible way to dispose of oil contaminated compressor condensate, ES2000 series oil water separators are a cost effective alternative to expensive waste disposal companies.

- Help to protect and maintain the environment
- Efficiently separate oil and water on-site and return up to 99.9% of the condensate to foul sewers
- Meet trade effluent discharge regulations
- Rapid payback over conventional disposal methods

# Certificates

Parker domnick hunter provide a comprehensive range of certificates to support their standard air / gas and liquid housings.

Certificate	
Type	Ordering Code
Vessel Inspection Certificate (included with vessel)	66 950 0013
Vessel Inspection Certificate (replacement)	66 950 0013
Material Certification Pack [EN10204 3.1]	66 950 0014
Certificate of Conformity	66 950 0015
Passivation Report	66 950 0016
Cleanliness Certificate	66 950 0017
Surface Finish Certificate	66 950 0018
Weld Procedure Certificate Pack	66 950 0019
Quality Plan	66 950 0026
Replacement IOMI (Installation, Operation and Maintenance Instructions)	17 950 0769



### BREATHING AIR PURIFIERS

#### Breathable air

Providing breathable quality compressed air in compliance with international standards, breathing air purifiers supply effective protection from harmful substances, maintaining employee health.

- High efficiency coalescing filter, for removal of oil / water
- Adsorption bed of activated carbon, for removal of oil vapour and odours
- Catalytic element, for removal of carbon monoxide



### NBC FILTRATION

#### Biological & chemical protection

The need to protect key personnel from attacks by chemical and biological weapons has never been greater. Given the escalation of this type of threat from terrorist groups and unstable nations, the development of the NBC filtration system provides effective protection.

- Fully regenerative
- Increased capacity
- Compact modular design



### HYPERCHILL

#### Precision chilled water

Hyperchill maximises productivity and minimises costs, as well as easy conformity to regulations on water quality. Hyperchill is the perfect solution to industrial chilled water needs.

- Increases productivity, reduces costs
- Adaptable to individual customer needs



### PCO<sub>2</sub>

#### Carbon dioxide polishing filter

Providing quality incident protection for beverage grade carbon dioxide, PCO<sub>2</sub> offers protection against carbon dioxide contamination and impurities of up to 10 times the allowable levels.

- Ensures compliance with quality guidelines published by the International Society for Beverage Technologies (ISBT)
- Protects drinks manufacturing processes from vapour impurities

For further information on the full range of Industrial and Gas Generation products available, please contact Parker domnick hunter Industrial Division

tel: +44 (0)191 402 9000  
fax: +44 (0)191 482 6296  
email: dhindsales@parker.com

# Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion or control technology need, Parker has the experience, breadth of product and global reach to consistently delivery. No company knows more about motion and control technology than Parker. For further information call 00800 27 27 5374



## AEROSPACE

### Key Markets

- Aircraft engines
- Business & general aviation
- Commercial transports
- Land-based weapons systems
- Military aircraft
- Missiles & launch vehicles
- Regional transports
- Unmanned aerial vehicles

### Key Products

- Flight control systems & components
- Fluid conveyance systems
- Fluid metering delivery & atomization devices
- Fuel systems & components
- Hydraulic systems & components
- Inert nitrogen generating systems
- Pneumatic systems & components
- Wheels & brakes




## CLIMATE CONTROL

### Key Markets

- Agriculture
- Air conditioning
- Food, beverage & dairy
- Life sciences & medical
- Precision cooling
- Processing
- Transportation

### Key Products

- CO<sup>2</sup> controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Solenoid valves
- Thermostatic expansion valves



## ELECTROMECHANICAL

### Key Markets

- Aerospace
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

### Key Products

- AC / DC drives & systems
- Electric actuators, gantry robots & slides
- Electrohydrostatic actuation systems
- Electromechanical actuation systems
- Human machines interface
- Linear motors
- Stepper motors, servo motors, drives & controls
- Structural extrusions



## FILTRATION

### Key Markets

- Food & beverage
- Industrial machinery
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation
- Process
- Transportation

### Key Products

- Analytical gas generators
- Compressed air & gas filters
- Condition monitoring
- Engine, air, fuel & oil filtration & systems
- Process, chemical, water & microfiltration filters
- Nitrogen, hydrogen & zero air generators



## FLUID & GAS HANDLING

### Key Markets

- Aerospace
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Mobile
- Oil & gas
- Transportation
- Welding

### Key Products

- Brass fittings & valves
- Diagnostic equipment
- Fluid conveyance systems
- Industrial hose
- PTFE & PFA hose, tubing & plastic fittings
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



## HYDRAULICS

### Key Markets

- Aerospace
- Aerial lift
- Agriculture
- Construction machinery
- Forestry
- Industrial machinery
- Mining
- Oil & gas
- Power generation & energy
- Truck hydraulics

### Key Products

- Diagnostic equipment
- Hydraulic cylinders & accumulators
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Power take-offs
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



## PNEUMATICS

### Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

### Key Products

- Air preparation
- Brass fittings & valves
- Manifolds
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves & controls
- Quick disconnects
- Rotary actuators
- Rubber & thermoplastic hose & couplings
- Structural extrusions
- Thermoplastic tubing & fittings
- Vacuum generators, cups & sensors



## PROCESS CONTROL

### Key Markets

- Chemical & refining
- Food, beverage & dairy
- Medical & dental
- Microelectronics
- Oil & gas
- Power generation

### Key Products

- Analytical sample conditioning products & systems
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves & regulators
- Instrumentation fittings, valves & regulators
- Medium pressure fittings & valves
- Process control manifolds



## SEALING & SHIELDING

### Key Markets

- Aerospace
- Chemical processing
- Consumer
- Energy, oil & gas
- Fluid power
- General industrial
- Information technology
- Life sciences
- Military
- Semiconductor
- Telecommunications
- Transportation

### Key Products

- Analytical sample conditioning products & systems
- Dynamic seals
- Elastomeric o-rings
- EMI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- Homogeneous & inserted elastomeric shapes
- High temperature metal seals
- Metal & plastic retained composite seals
- Thermal management



ENGINEERING YOUR SUCCESS.

# Parker Worldwide

AE – UAE, Dubai  
Tel: +971 4 8127100  
parker.me@parker.com

AR – Argentina, Buenos Aires  
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

AU – Australia, Castle Hill  
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

BR – Brazil, Cachoeirinha RS  
Tel: +55 51 3470 9144

BY – Belarus, Minsk  
Tel: +375 17 209 9399  
parker.belarus@parker.com

CA – Canada, Milton, Ontario  
Tel: +1 905 693 3000

CH – Switzerland, Etoy  
Tel: +41 (0) 21 821 02 30  
parker.switzerland@parker.com

CL – Chile, Santiago  
Tel: +56 2 623 1216

CN – China, Shanghai  
Tel: +86 21 2899 5000

CZ – Czech Republic, Klecany  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

DE – Germany, Kaarst  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

DK – Denmark, Ballerup  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

ES – Spain, Madrid  
Tel: +34 902 330 001  
parker.spain@parker.com

FI – Finland, Vantaa  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

FR – France, Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

GR – Greece, Athens  
Tel: +30 210 933 6450  
parker.greece@parker.com

HK – Hong Kong  
Tel: +852 2428 8008

HU – Hungary, Budapest  
Tel: +36 1 220 4155  
parker.hungary@parker.com

IE – Ireland, Dublin  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

IN – India, Mumbai  
Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)  
Tel: +39 02 45 19 21  
parker.italy@parker.com

JP – Japan, Tokyo  
Tel: +(81) 3 6408 3901

KR – South Korea, Seoul  
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty  
Tel: +7 7272 505 800  
parker.easteurope@parker.com

LV – Latvia, Riga  
Tel: +371 6 745 2601  
parker.latvia@parker.com

MX – Mexico, Apodaca  
Tel: +52 81 8156 6000

MY – Malaysia, Shah Alam  
Tel: +60 3 7849 0800

NL – The Netherlands, Oldenzaal  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

NO – Norway, Ski  
Tel: +47 64 91 10 00  
parker.norway@parker.com

NZ – New Zealand, Mt Wellington  
Tel: +64 9 574 1744

PL – Poland, Warsaw  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

PT – Portugal, Leca da Palmeira  
Tel: +351 22 999 7360  
parker.portugal@parker.com

RO – Romania, Bucharest  
Tel: +40 21 252 1382  
parker.romania@parker.com

RU – Russia, Moscow  
Tel: +7 495 645-2156  
parker.russia@parker.com

SE – Sweden, Spånga  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

SG – Singapore  
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica  
Tel: +421 484 162 252  
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

TH – Thailand, Bangkok  
Tel: +662 717 8140

TR – Turkey, Istanbul  
Tel: +90 216 4997081  
parker.turkey@parker.com

TW – Taiwan, Taipei  
Tel: +886 2 2298 8987

UA – Ukraine, Kiev  
Tel +380 44 494 2731  
parker.ukraine@parker.com

UK – United Kingdom, Warwick  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

US – USA, Cleveland  
Tel: +1 216 896 3000

VE – Venezuela, Caracas  
Tel: +58 212 238 5422

ZA – South Africa, Kempton Park  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

European Product Information Centre  
Free phone: 00 800 27 27 5374  
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, UK, ZA)

© 2009 Parker Hannifin Corporation

07/09 Rev. 1A



Parker Hannifin Ltd  
Parker domnick hunter  
Process Division  
Durham Road  
Birtley, Co. Durham  
DH3 2SF, England  
phone +44 (0)191 4105121  
fax +44 (0)191 4105312  
email: dhprocess@parker.com  
www.domnickhunter.com

Parker Process Advanced Filtration  
2340 Eastman Avenue  
Oxnard, CA 93030, USA  
phone +1 805 604 3400  
fax +1 805 604 3401